




HEYClip™ MaxRunner® Cable Clip Arrays

Clip Mount or Flush Mount with Screws, accommodates up to **12 Cables**

- **Hold up to 12 cables** with wire diameters ranging from .20" (5,2 mm) to .28" (7,2 mm).
- Patented design is the ultimate multiple strand wire management.
- Molded internal locking tabs securely hold the cables in place preventing side-to-side movement or slippage of the cables.
- Constructed from PPE+PS flame retardant "Noryl" material with a V-0 flame rating and a UV (f1) rating for excellent resistance to outdoor exposure.
- **Clip Mount** features a versatile, 301 stainless steel mounting clip.
- Clip is designed to secure the holder to a wide variety of aluminum extruded mounting rails of various profiles with thicknesses up to .250" (6,4 mm).
- **Flush Mount** designed to mount on flat panels or extrusions without mounting ledges.
- Easily attaches to any flat surface with four mounting screws.
- Recommended spacing is 4 feet.
- Load Rating not to exceed 15 lbs.
- US Patent No. 8950712B2

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (12) Wires		PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum		Maximum		in.	mm.			in.	mm.	in.	mm.
in.	mm.	in.	mm.								
Clip Mount											
.06	1,5	.25	6,4	.20 - .28	5,2 - 7,2	S6403	MaxRunner 12 Clip Mount	3.00 x 3.13	76,2 - 79,5	.98	24,9
Flush Mount*											
N/A: designed for flat mount				.20 - .28	5,2 - 7,2	S6433	MaxRunner 12 Flush Mount	3.00 x 3.13	76,2 - 79,5	1.00	25,4

*Screws not included

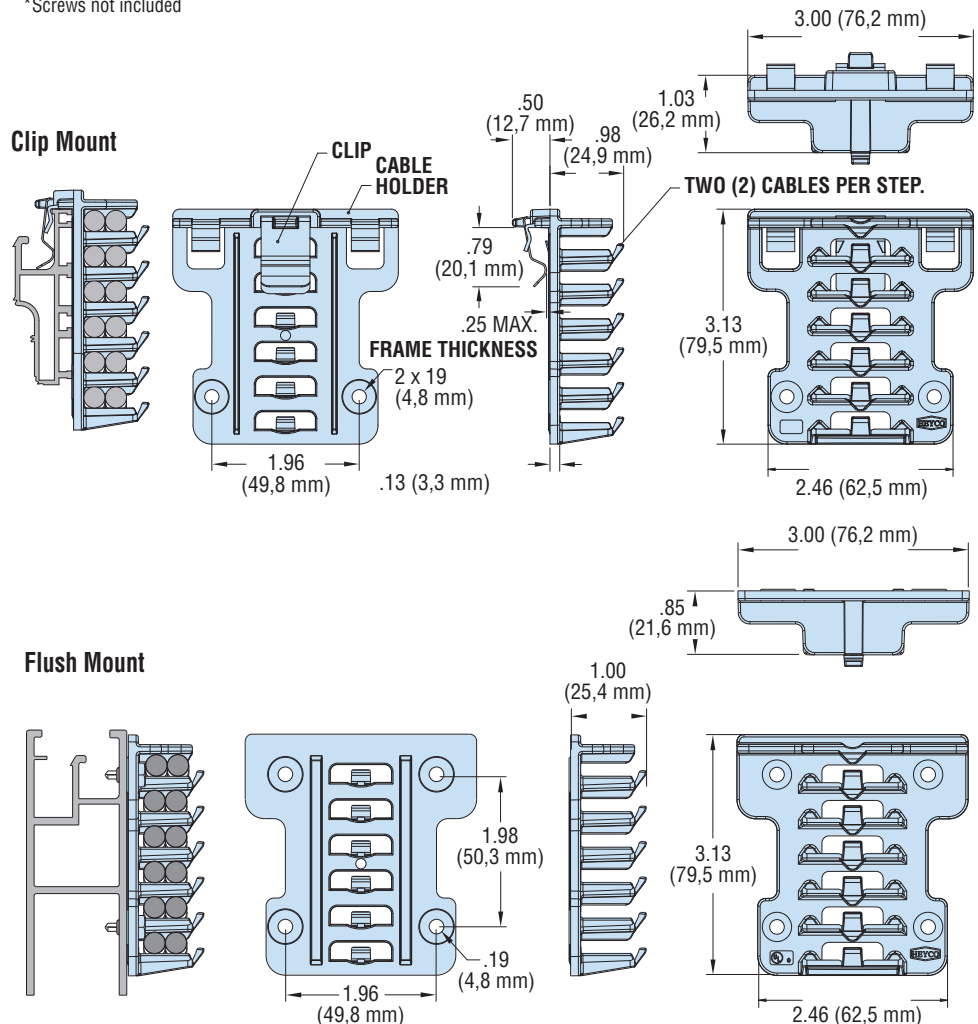

*Quick
Specs*

Materials

Certifications



PPE & PS Noryl (Clip Mount includes a 301 stainless steel mounting clip)
Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523

Flammability Rating

94V-0

Temperature Range

-40°F (-40°C) to 203°F (95°C)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[4344](#) [4341](#) [4343](#) [4338](#) [12028](#) [12026](#) [12025](#) [12027](#) [4342](#) [4337](#) [4340](#) [4339](#)