

**"Stay Connected" with**



**Liquid Tight Cordgrips**







a PennEngineering® Company




## Heyco® -Tite Aluminum Liquid Tight Cordgrips

### Straight-Thru, NPT Hubs

*The Ultimate in Liquid Tight Strain Relief Protection*

CABLE DIA. RANGE				PART NO.  Machined Aluminum	THREAD SIZE		PART DIMENSIONS							
Minimum		Maximum					A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Flat Size	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.
.125	3,2	.188	4,8	M5029	NPT 3/4		1.09	27,7	1.62	41,1	.56	14,2	1.13	28,7
.188	4,8	.250	6,4	M5030										
.250	6,4	.312	7,9	M5031										
.312	7,9	.375	9,5	M5032										
.375	9,5	.438	11,1	M5033										
.438	11,1	.500	12,7	M5034										
.500	12,7	.562	14,3	M5035										
.562	14,3	.625	15,9	M5036	NPT 3/4		1.09	27,7	1.82	46,2	.56	14,2	1.37	34,8
.438	11,1	.500	12,7	M5037										
.500	12,7	.562	14,3	M5038										
.562	14,3	.625	15,9	M5039										
.562	14,3	.688	17,5	M5040										
.625	15,9	.750	19,1	M5041										
.688	17,5	.812	20,6	M5042										
.438	11,1	.562	14,3	M5050	NPT 1		1.38	35,1	2.03	51,6	.62	15,7	1.56	39,6
.562	14,3	.625	15,9	M5051										
.562	14,3	.688	17,5	M5052										
.625	15,9	.750	19,1	M5053										
.688	17,5	.812	20,6	M5054										
.750	19,1	.875	22,2	M5055										
.812	20,6	.938	23,8	M5056										
.875	22,2	1.000	25,4	M5057*	NPT 1		1.38	35,1	2.50	63,5	.69	17,5	2.25	57,2
.875	22,2	1.000	25,4	M5058										
1.000	25,4	1.125	28,6	M5059										
1.125	28,6	1.250	31,8	M5060										
1.250	31,8	1.375	34,9	M5061	NPT 1-1/4		1.72	43,7	2.50	63,5	.69	17,5	2.25	57,2
.562	14,3	.688	17,5	M5062										
.688	17,5	.812	20,6	M5063										
.750	19,1	.875	22,2	M5064										
.875	22,2	1.000	25,4	M5065										
1.000	25,4	1.125	28,6	M5066										
1.125	28,6	1.250	31,8	M5067										
1.250	31,8	1.375	34,9	M5068										

Assembled O-ring **INCLUDED**. \*Not UL Listed or CSA Certified.  
Locknut not included - See page 3-48 for Metal Locknuts.

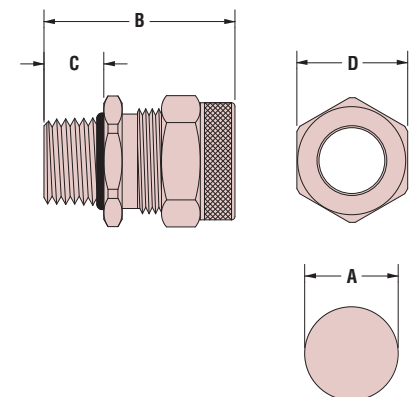

**SUGGESTED CLEARANCE HOLE FOR NONTHEADED MOUNTING**

Material  
Certifications



Aluminum with Neoprene Sealing Gland and Viton® O-Ring

Listed under Underwriters' Laboratories File E51579



Certified by Canadian Standard Association File 258093

Flammability Rating

94V-2

Temperature Range

-40°F (-40°C) to 250°F (121°C)

IP Rating

IP 67

*Quick Specs*

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[M5042](#) [M5035](#) [M5066](#) [M5063](#) [M5067](#) [M5062](#) [M5065](#) [M5068](#) [M5064](#) [M5031](#) [M5059](#) [M5033](#) [M5036](#) [M5030](#)  
[M5039](#) [M5034](#) [M5052](#) [M5058](#) [M5053](#) [M5032](#) [M5050](#) [M5057](#) [M5061](#) [M5055](#) [M5054](#) [M5038](#) [M5029](#) [M5040](#)  
[M5051](#) [M5056](#) [M5041](#) [M5037](#) [M5060](#) [M5033L](#) [M5041L](#)