

HEYCO

Heyco® -Tite Snap-In-2® Liquid Tight Cordgrips

Pigtail™, Snap-In Hubs

For Panels from .062" (1,6 mm) to .125" (3,2 mm) Thick


The Ultimate in Liquid Tight Strain Relief Protection

**NO LOCKNUT
REQUIRED!**




CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or RV	PANEL DIMENSIONS						
Minimum		Maximum					Black	A Mounting Hole Dia.		B To Prevent Rotation		C Max. O.A. Length	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.
.065 .115	1,7 2,9	.210 .250	5,3 6,4	M3862 M3860	Flex LTRSCG 500 Flex LTSCG 500	RV	.500	12,7	.450	11,4	2.50	63,5	
.065 .105	1,7 2,7	.230 .315	5,8 8,0	M3868 M3866	Flex LTRSCG 625 Flex LTSCG 625		RV	.625	15,9	.550	14,0	2.83	71,9
.069 .230	1,8 5,8	.250 .395	6,4 10,0	M3874 M3872	Flex LTRSCG 750 Flex LTSCG 750	RV	.750	19,1	.660	16,8	3.46	87,9	
.095 .170	2,4 4,3	.260 .450	6,6 11,4	M3880 M3878	Flex LTRSCG 875 Flex LTSCG 875		RV	.875	22,2	.770	19,6	3.86	98,0
.180 .260	4,6 6,6	.440 .546	11,2 13,9	M3886 M3884	Flex LTRSCG 1000 Flex LTSCG 1000	RV	1.000	25,4	.875	22,2	4.32	109,7	
.485	12,3	.709	18,0	M3896	Flex LTSCG 1125		RV	1.125	28,6	1.000	25,4	4.90	124,5

Standard color black.

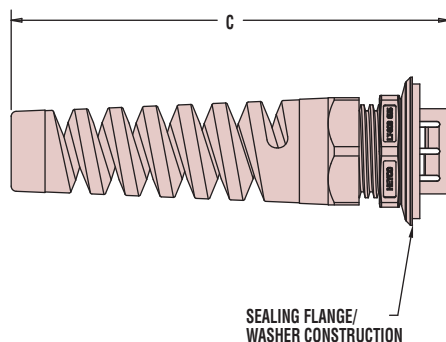

SEALING FLANGE/
WASHER CONSTRUCTION



SUGGESTED
CLEARANCE HOLE
FOR NONTHREADED
MOUNTING

- Integral nylon spring eases the cable into a lazy bend; prevents kinking and assures longest cable and product life.
- Easy installation—unique fingers securely snap into a range of panel thicknesses – up to .125" (3,2 mm) – with no tools or locknuts required.
- Sealing flange prevents sealing washer displacement due to water velocity to ensure a liquid tight IP 65 seal.
- Eliminate need for locknut or threaded hole to achieve liquid tight seal at panel; perfect for low clearance installation where locking nut access is limited.
- Ratchet design of sealing nut assembly provides superior anti-vibration and ensures a firm grip on the cable.
- Foam washer included.
- Rotation prevented when used in "Double D" mounting holes.
- Available in multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Consult Heyco for cordgrips molded in other colors.

Material
Certifications

Nylon 6/6 w/Buna N or TPE Sealing Gland
RV Recognized under Components Program of Underwriters' Laboratories
File E51579

Flammability Rating
Temperature Range

CS Certified by Canadian Standard Association File 93876C
94V-2
Static -40°F (-40°C) to 239°F (115°C)
Dynamic -4°F (-20°C) to 212°F (100°C)
IP 65

IP Rating

*Quick
Specs*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[M3884](#) [M3886](#) [M3896](#) [M3898](#)