


## HEYClip™ Nylon Snap Lock Pins

| MOUNTING HOLE DIA.              |     | ASSEMBLED PANEL THICKNESS |      | PART NO.     | DESCRIPTION | PART DIMENSIONS |      |             |     |             |     |               |     |
|---------------------------------|-----|---------------------------|------|--------------|-------------|-----------------|------|-------------|-----|-------------|-----|---------------|-----|
| in.                             | mm. | in.                       | mm.  |              |             | A Length        |      | B Clip Dia. |     | C Head Dia. |     | D Head Height |     |
|                                 |     |                           |      | Natural      |             | in.             | mm.  | in.         | mm. | in.         | mm. | in.           | mm. |
| <b>SLP1 Series - Flush Head</b> |     |                           |      |              |             |                 |      |             |     |             |     |               |     |
| .098                            | 2,5 | .177                      | 4,5  | <b>12040</b> | SLP1-177    | .26             | 6,6  |             |     |             |     |               |     |
|                                 |     | .221                      | 5,6  | <b>12041</b> | SLP1-221    | .30             | 7,6  |             |     |             |     |               |     |
|                                 |     | .236                      | 6,0  | <b>12042</b> | SLP1-236    | .31             | 7,9  |             |     |             |     |               |     |
|                                 |     | .245                      | 6,2  | <b>12043</b> | SLP1-245    | .32             | 8,1  |             |     |             |     |               |     |
|                                 |     | .307                      | 7,8  | <b>12044</b> | SLP1-307    | .39             | 9,9  |             |     |             |     |               |     |
|                                 |     | .316                      | 8,0  | <b>12045</b> | SLP1-316    | .40             | 10,0 | .09         | 2,4 | .20         | 5,1 | .05           | 1,3 |
|                                 |     | .330                      | 8,4  | <b>12046</b> | SLP1-330    | .41             | 10,4 |             |     |             |     |               |     |
|                                 |     | .413                      | 10,5 | <b>12047</b> | SLP1-413    | .49             | 12,4 |             |     |             |     |               |     |
|                                 |     | .638                      | 16,2 | <b>12048</b> | SLP1-638    | .72             | 18,3 |             |     |             |     |               |     |
|                                 |     | .660                      | 16,8 | <b>12049</b> | SLP1-660    | .74             | 18,8 |             |     |             |     |               |     |
|                                 |     | .701                      | 17,8 | <b>12050</b> | SLP1-701    | .78             | 19,8 |             |     |             |     |               |     |

|                                       |     |      |      |              |            |     |      |     |     |     |     |     |     |
|---------------------------------------|-----|------|------|--------------|------------|-----|------|-----|-----|-----|-----|-----|-----|
| <b>SLP100 Series - Lip Under Head</b> |     |      |      |              |            |     |      |     |     |     |     |     |     |
| <b>ALL NEW!</b>                       |     |      |      |              |            |     |      |     |     |     |     |     |     |
| .098                                  | 2,5 | .177 | 4,5  | <b>12051</b> | SLP100-177 | .26 | 6,6  |     |     |     |     |     |     |
|                                       |     | .221 | 5,6  | <b>12052</b> | SLP100-221 | .30 | 7,6  |     |     |     |     |     |     |
|                                       |     | .236 | 6,0  | <b>12053</b> | SLP100-236 | .31 | 7,9  |     |     |     |     |     |     |
|                                       |     | .245 | 6,2  | <b>12054</b> | SLP100-245 | .32 | 8,1  |     |     |     |     |     |     |
|                                       |     | .307 | 7,8  | <b>12055</b> | SLP100-307 | .39 | 9,9  |     |     |     |     |     |     |
|                                       |     | .316 | 8,0  | <b>12056</b> | SLP100-316 | .40 | 10,0 | .09 | 2,4 | .20 | 5,1 | .06 | 1,5 |
|                                       |     | .330 | 8,4  | <b>12057</b> | SLP100-330 | .41 | 10,4 |     |     |     |     |     |     |
|                                       |     | .413 | 10,5 | <b>12058</b> | SLP100-413 | .49 | 12,4 |     |     |     |     |     |     |
|                                       |     | .638 | 16,2 | <b>12059</b> | SLP100-638 | .72 | 18,3 |     |     |     |     |     |     |
|                                       |     | .660 | 16,8 | <b>12060</b> | SLP100-660 | .74 | 18,8 |     |     |     |     |     |     |
|                                       |     | .701 | 17,8 | <b>12061</b> | SLP100-701 | .78 | 19,8 |     |     |     |     |     |     |

Standard color natural. Consult Heyco for black and other colors.

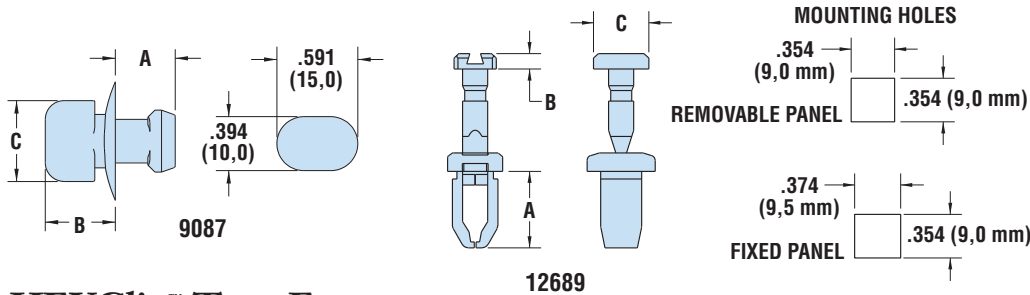

## HEYClip™ Turn Fastener

| WILL FIT THESE PANELS |             |                 |      |     |     | PART NO. | DESCRIPTION | PART DIMENSIONS |                  |     |                  |     |      |
|-----------------------|-------------|-----------------|------|-----|-----|----------|-------------|-----------------|------------------|-----|------------------|-----|------|
| MOUNTING HOLE         |             | ASSEMBLED       |      |     |     |          |             | A<br>Length     | B<br>Head Height |     | C<br>Head Length |     |      |
|                       |             | PANEL THICKNESS |      |     |     |          |             |                 |                  |     |                  |     |      |
|                       |             | Min.            | Max. |     |     | Black    |             |                 |                  |     |                  |     |      |
| in.                   | mm.         | in.             | mm.  | in. | mm. |          |             | in.             | mm.              | in. | mm.              | in. | mm.  |
| .39 x .59             | 10,0 x 15,0 | .24             | 6,0  | .28 | 7,0 | 9087     | TF 394-236  | .44             | 11,1             | .51 | 13,0             | .59 | 15,0 |
| see schematic         |             | .09             | 2,4  | .11 | 2,7 | 12689    | TF 354-354  | .48             | 12,2             | .13 | 3,2              | .45 | 11,4 |
| NEW!                  |             |                 |      |     |     |          |             |                 |                  |     |                  |     |      |

Standard color black.

## HEYClip™ Nylon Pawl Locks


| WILL FIT THESE PANELS |     |                           |     |     |      | PART NO.      | DESCRIPTION     | PART DIMENSIONS |      |               |     |                 |      |      |
|-----------------------|-----|---------------------------|-----|-----|------|---------------|-----------------|-----------------|------|---------------|-----|-----------------|------|------|
| MOUNTING HOLE DIA.    |     | ASSEMBLED PANEL THICKNESS |     |     |      |               |                 | A Length        |      | B Head Height |     | C Head Diameter |      |      |
| in.                   | mm. | in.                       | mm. | in. | mm.  |               |                 | in.             | mm.  | in.           | mm. | in.             | mm.  |      |
| .250                  | 6,4 | .03                       | 0,8 | .29 | 7,4  | <b>10677B</b> | HPFP - 1 Black  | .41             | 10,4 | .08           | 2,0 | .72             | 18,3 | NEW! |
|                       |     | .16                       | 4,0 | .55 | 13,9 | <b>10676</b>  | HPL - 1 Natural | .63             | 15,9 | .08           | 2,0 | .50             | 12,7 |      |

Standard color as shown.


|                     |                              |
|---------------------|------------------------------|
| Material            | Nylon 6/6                    |
| Flammability Rating | 94V-2                        |
| Temperature Range   | -4°F (-18°C) to 185°F (85°C) |



- Used to fix connectors to the printed circuit board prior to wave soldering.




SLP1 Series



SLP100 Series



- Part Description Key:  
TF X-YYY where XXX = Mounting Hole Diameter (inches) and YYY = minimum Panel Thickness (inches)



HPL-1 Series

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[9087](#) [10676F](#) [10676](#) [12047](#) [12040](#) [12041](#) [12049](#) [12045](#) [12048](#) [12050](#) [12046](#) [12044](#) [12042](#) [12043](#) [12054](#)  
[12057](#) [12051](#) [12052](#) [10677B](#) [12060](#) [12059](#) [12053](#) [12055](#) [12058](#) [12061](#) [12056](#) [12689](#)