

Heyco® Snap-In Cordgrip Strain Reliefs – Pigtail™



The Ultimate in Snap-In Strain Relief Protection

For Panels from .062" (1,6 mm) to .125" (3,2 mm) Thick

WILL FIT THESE CABLES				PART NO.	DESCRIPTION	 or 	PANEL DIMENSIONS				C Max O.A. Length		Mounting Hole Plug
Minimum Diameter		Maximum Diameter					A Mounting Hole	B To Prevent Rotation					
in.	mm.	in.	mm.	Black				in.	mm.	in.	mm.	in.	mm.
.065 .115	1,7 2,9	.220 .250	5,6 6,4	M4902 M4900	RSCG 500-7 SCG 500-7		.500	12,7	.450	11,4	2.50	63,5	2491
.065 .105	1,7 2,7	.187 .312	4,8 7,9	M4908 M4906	RSCG 625-7 SCG 625-7		.625	15,9	.550	14,0	2.83	71,9	2497
.069 .230	1,8 5,8	.250 .395	6,4 10,0	M4914 M4912	RSCG 750-7 SCG 750-7		.750	19,1	.660	16,8	3.46	87,9	2503
.095 .170	2,4 4,3	.260 .450	6,6 11,4	M4920 M4918	RSCG 875-7 SCG 875-7		.875	22,2	.770	19,6	3.86	98,0	2509
.180 .260	4,6 6,6	.440 .546	11,2 13,9	M4926 M4924	RSCG 1000-7 SCG 1000-7		1.000	25,4	.875	22,2	4.31	109,5	2713*
.250 .485	6,4 12,3	.485 .709	12,3 18,0	M4932 M4930	RSCG 1093-7 SCG 1093-7		1.093	27,8	.970	24,6	4.90	124,5	2727

Standard color black.

*For round Mounting Hole only. For DD Mounting Hole Plug, consult Heyco.

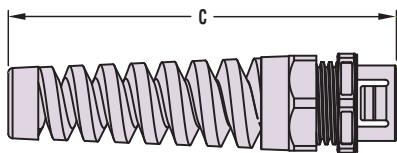

SUGGESTED CLEARANCE HOLE FOR NONTHEADED MOUNTING



- **Integral nylon spring eases the cable into a lazy bend; prevents kinking and assures longest cable and product life.**
- Unique fingers securely lock into a range of panel sizes without use of locknut.
- Smooth, rounded interior edges for ease of installation.
- Limited intrusion into enclosure where access is tight.
- Rotation prevented when used in Double D mounting holes.
- Easy to install—no tools required.
- Ratchet design of sealing nut assembly provides superior anti-vibration and ensures a firm grip on the cable.
- Available in multiple sizes for cable diameters ranging from .065" (1,7 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Meet UL strain relief requirements without kinking the cable.
- For Foam Washers, see page 2-15.
- Though similar in appearance and function to Heyco-Tite Liquid Tight Cordgrips, Snap-in Cordgrip Strain Reliefs may not be liquid tight at the panel interface. For our complete range of **Liquid Tight** Cordgrips with Integral Sealing Ring, see Section 3.
- Use Heyco **Mounting Hole Plugs** for DD Mounting Holes, or **Heyco Dome Plugs** for round Mounting Holes, to fill blank/unused Mounting Holes and thus allow for a single panel design across multiple applications. See section 6.

Material
Certifications

Nylon 6/6 w/Buna N Sealing Gland
 UL Recognized under Underwriters' Laboratories File E51579
 CS Certified by Canadian Standards Association File 093876
 94V-2
 -22°F (-30°C) to 212°F (100°C)

Flammability Rating
Temperature Rating

Quick Specs

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[M4912](#) [M4906](#) [M4914](#) [M4908](#) [M4900](#) [M4918](#) [M4902](#) [M4920](#) [M4924](#) [M4930](#) [M4932](#) [M4926](#)