



Tension Barb Style

- **Provide spacing** between the printed circuit board and the panel or between circuit boards.
- Wide, ribbed wings produce a secure fit with extra stability.
- Multiple spacing heights from .187" (4,7 mm) to .750" (19,0 mm).
- Two Styles:
 - 1) Panel barb end, plus tension barb end for PCB.
 - 2) Panel barb end, plus locking barb end for PCB.

Panel Dimensions		PCB Dimensions		Part No.	Description	Part Dimensions		
Maximum Thickness	Mounting Hole Diameter	Maximum Thickness	Mounting Hole Diameter			A Spacing	B Head Length	C* Foot Length
in. mm.	in. mm.	in. mm.	in. mm.	Natural		in. mm.	in. mm.	in. mm.

.07	1,8	.187	4,7	.06	1,6	.156	4,0	3640	SST 3/16	.19	4,8				
								3641	SST 1/4	.25	6,4				
								3642	SST 3/8	.38	9,5				
								3643	SST 7/16	.44	11,1	.40	10,2	.21	5,3
								3644	SST 1/2	.50	12,7				
								3645	SST 5/8	.63	15,9				
								3646	SST 3/4	.75	19,0				


*Extension beyond .070" (1.8 mm) thick panel.

Locking Barb Style


Panel Dimensions		PCB Dimensions		Part No.	Description	Part Dimensions		
Maximum Thickness	Mounting Hole Diameter	Maximum Thickness	Mounting Hole Diameter			A Spacing	B Head Length	C* Foot Length
in. mm.	in. mm.	in. mm.	in. mm.	Natural		in. mm.	in. mm.	in. mm.

.07	1,8	.187	4,7	.06	1,6	.156	4,0	3670	SS L 3/16	.19	4,8						
								3671	SS L 1/4	.25	6,4						
								3672	SS L 3/8	.38	9,5						
								3673	SS L 7/16	.44	11,1	.35	8,9	.21	5,3		
								3674	SS L 1/2	.50	12,7						
								3675	SS L 5/8	.63	15,9						
								3676	SS L 3/4	.75	19,0						

*Extension beyond .070" (1,8 mm) thick panel.

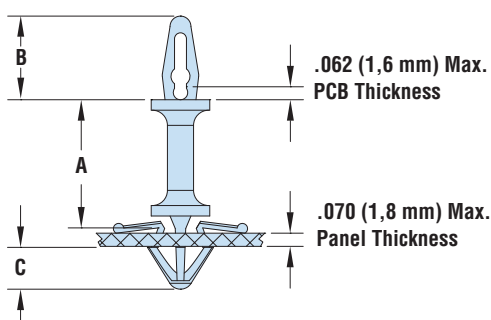

Tension Barb

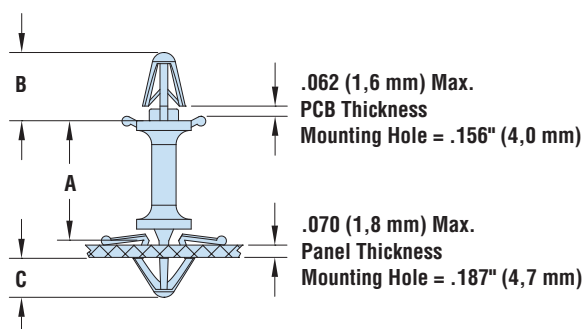

Locking Barb

94V-2
32°F (0°C) to 185°F (85°C)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[3674](#) [3670](#) [3672](#) [3671](#) [3676](#) [3675](#) [3673](#) [3640](#) [3645](#) [3642](#) [3641](#) [3643](#) [3646](#) [3644](#)