

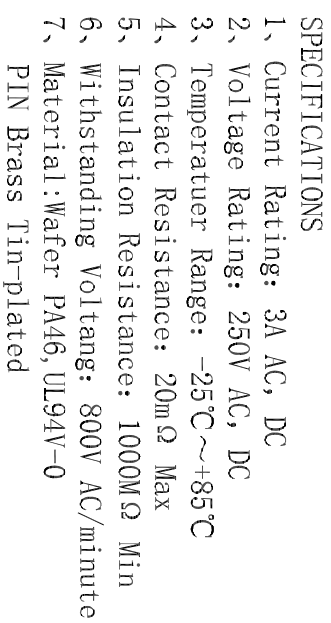


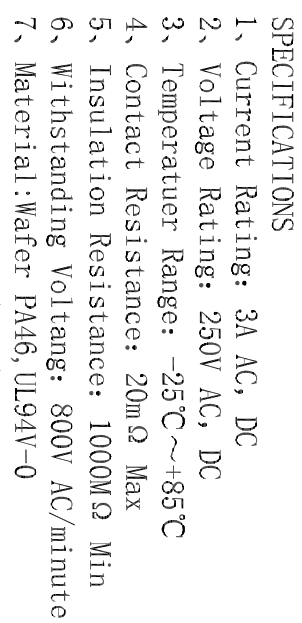


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltage: 800V AC/minute
- 7、Material: Wafer PA46, UL94V-0

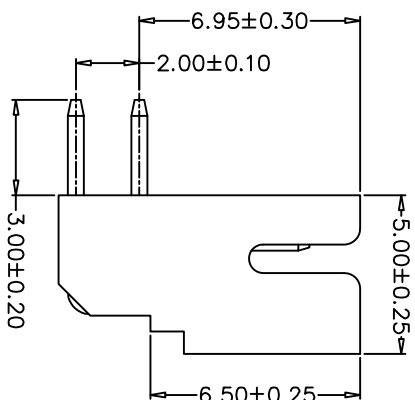

编 号	尺寸 (mm)	
	A	B
A2004-2X02AW	2.00	6.00
A2004-2X03AW	4.00	8.00
A2004-2X04AW	6.00	10.00
A2004-2X05AW	8.00	12.00
A2004-2X06AW	10.00	14.00
A2004-2X07AW	12.00	16.00
A2004-2X08AW	14.00	18.00
A2004-2X09AW	16.00	20.00
A2004-2X10AW	18.00	22.00
A2004-2X11AW	20.00	24.00
A2004-2X12AW	22.00	26.00
A2004-2X20AW	38.00	42.00

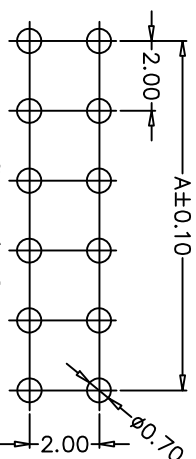

PCB LAYOUT



深圳市泰华电子有限公司 <i>TaiHua Electronics Co., Ltd</i>			
单位 UNIT	mm		
比例 SCALE			
			
X ₁ ±0.5	X ₂ ±		
X ₃ ±0.30	X ₄ ±	接收: APPROVED BY	版本: A0
X ₅ ±0.20	X ₆ ±	审核: CHECKED BY	产品: 产品名称 Product No
X ₇ ±0.005, X ₈ ±		封文辉 DRAWN BY 2022.9.5	日期: 客户料号 Client No
		PHD弯针 WAFER DIP TYPE	
		TH-A2004-2XNAW	

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd