


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.17	阿树

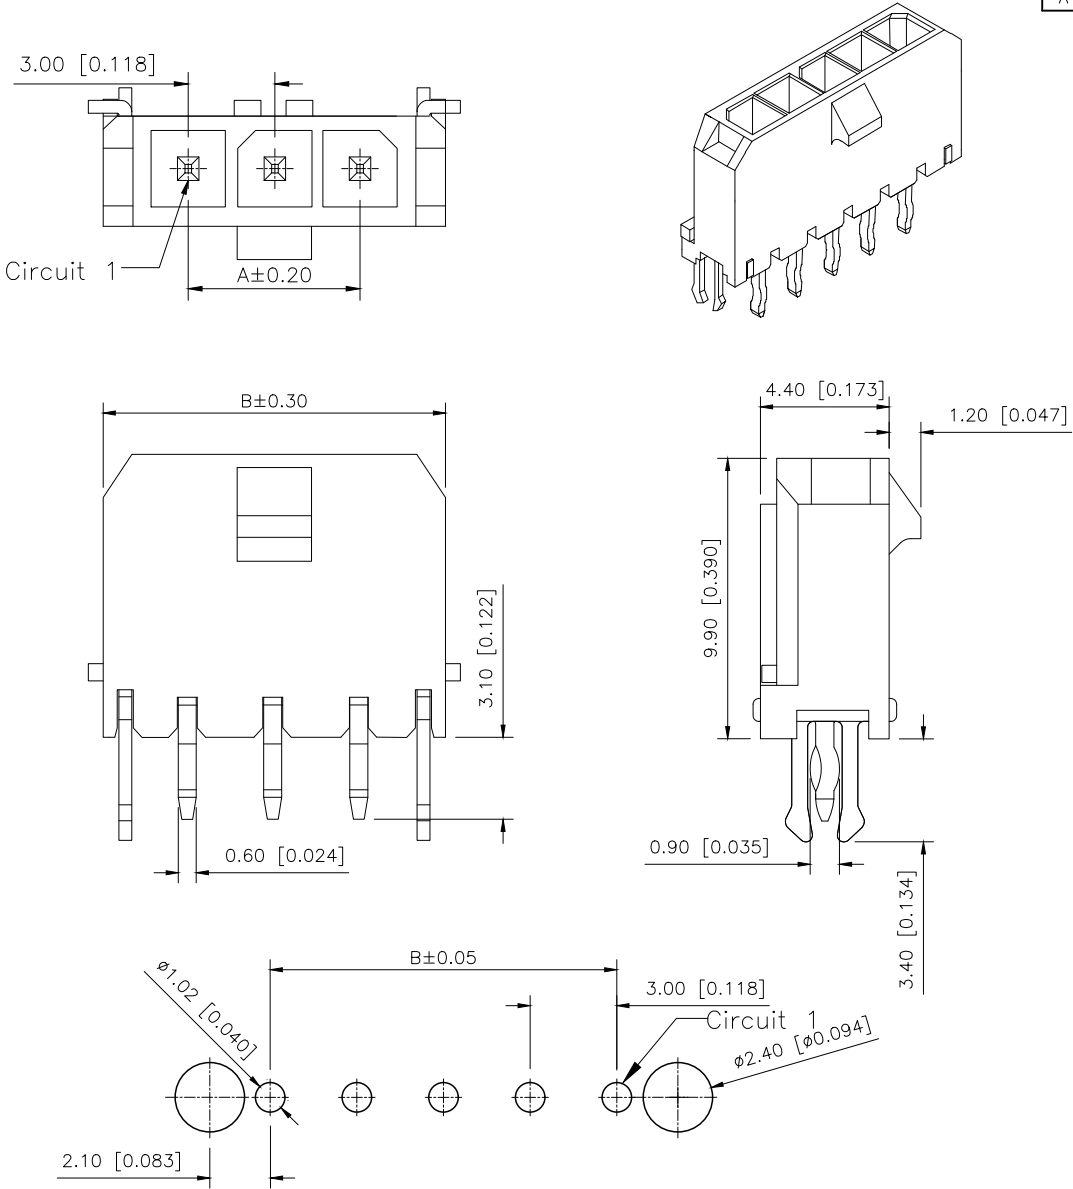

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:5A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range:−45°C+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing: ≤20mΩ

PART NO.:

X3025 W V-XX C-LP SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series No
②Category:W—Wafer
③Welding Board Angle:V—Stright 180°
④Row No.Pin No:XX—02~12Pin
⑤Special NO:C—The harpoon
⑥Material:LP—LCP UL94V—0
⑦Planting Category:SN—Bright tin plating
⑧Color:Blank—Natural Color

Poles	Dimensions (mm)	
	A	B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

X3025WV-XXC-LPSN	LCP UL 94V-0	Brass	Tin-Plated	X3025H
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With XKB Housing

PCB LAYOUT

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.00mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X3025WV-XXC-LPSN
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1