

Printview: 2-conductor female connector; with ground end module (green-yellow); for insertion into carrier terminal blocks; codable; 3-pole - Item No.: 2020-203/000-039



2-conductor female connector; with ground end module (green-yellow); for insertion into carrier terminal blocks; codable; 3-pole

Item No.: 2020-203/000-039



2-conductor female connector; with ground end module (green-yellow); for insertion into carrier terminal blocks; codable; 3-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	2020-203/000-039
GTIN / EAN	4050821091554
Content	1
Order amount	50
Customer item number	

Notes

Item description: According to EN 61984, pluggable connectors without current interrupting capacity shall not be mated and unmated when live or under load.


Technical data


Miscellaneous

Packaging type	BOX
Ratings per	IEC/EN 61984
Rated voltage (III / 3) [V]	500 [V]

Technical data	
Rated impulse voltage (III / 3) [kV]	6 [kV]
Rated current [A]	13.5 [A]
Legend (ratings)	(III / 3) Overvoltage category III / Pollution degree 3
Type of wiring	Front-entry wiring
No. of poles	3
Total number of connection points	6
Total number of potentials	3
Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross section	1 mm ²
Solid conductor	0.14 ... 1.5 mm ² / 24 ... 16 AWG
Solid conductor, push-in termination	0.5 ... 1.5 mm ² / 20 ... 16 AWG
Fine-stranded conductor	0.14 ... 1.5 mm ² / 24 ... 16 AWG
Fine-stranded conductor with ferrule, push-in termination, f	0.5 mm ² / 20 AWG
Strip length	9 ... 11 mm / 0.35 ... 0.43 Inch
Width	11.2 mm / 0.441 Inch
Height	40.5 mm / 1.594 Inch
Depth	25 mm / 0.984 Inch
Marking level	Side marking
Contact type (pluggable connector)	Female connector/socket
Connector connection type	for conductors
Color	gr-ge/grau
Insulating material	Polyamide 66 (PA 66)
Fire load [MJ]	0.147 [MJ]
Weight [g]	8.66 [g]
Product Family	X-COM S-Mini
Main product function	Female connector/socket
Product type	Pluggable rail-mount terminal blocks

Images & drawings

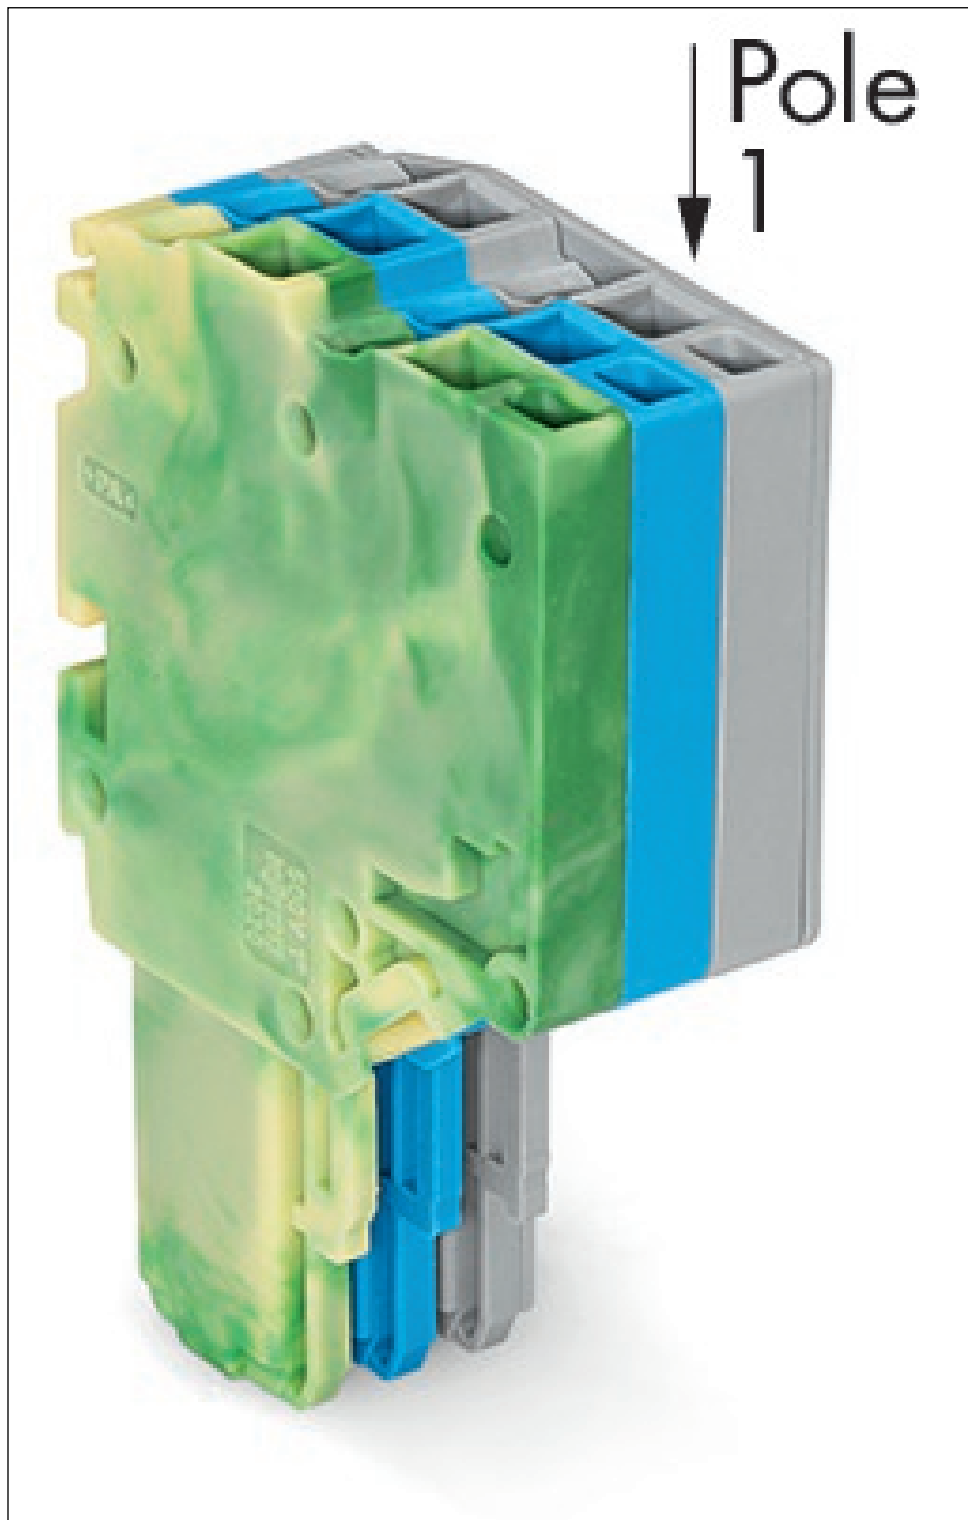

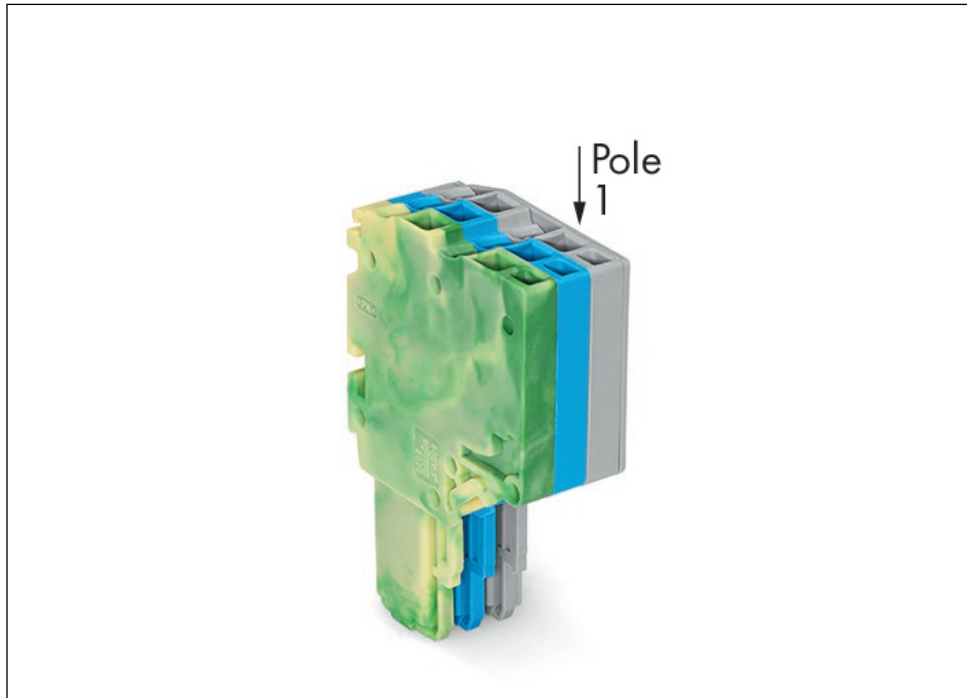

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.