



	ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. SPC-F005.DWG		REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
			DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			1876	A	RELEASED	EO	07/25/06	SA	07/25/06	HO	07/25/06

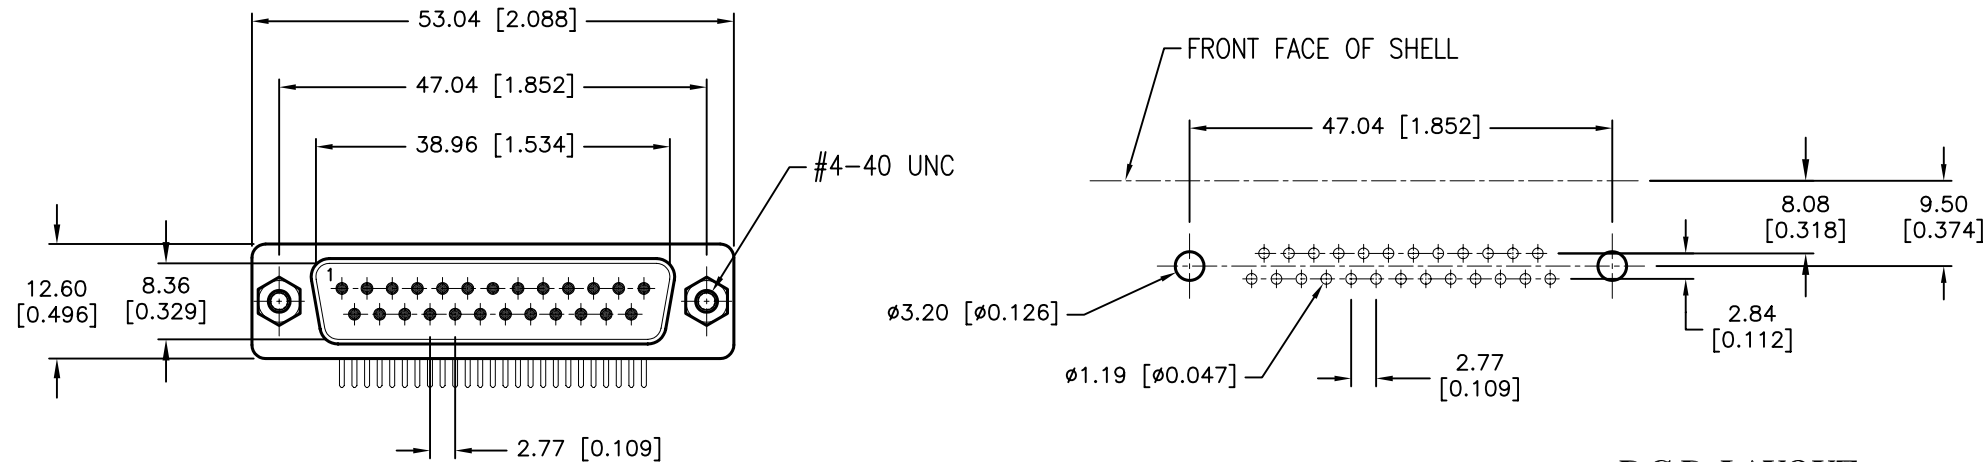

P.C.B. LAYOUT

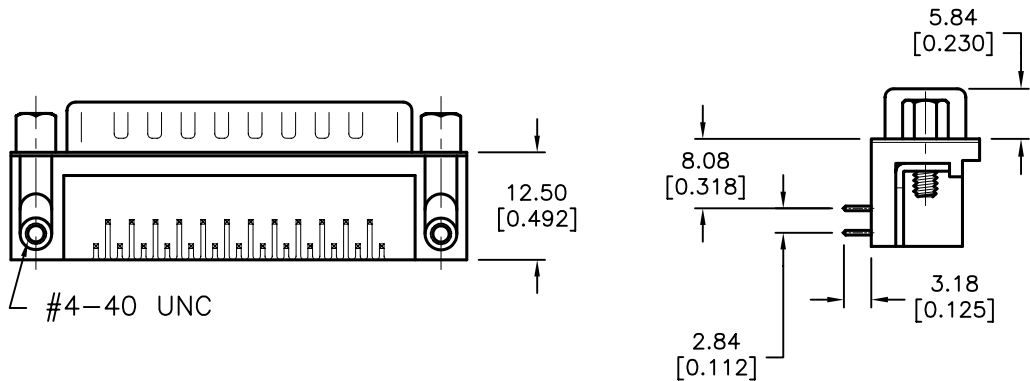

SPECIFICATIONS:

1. Shell: Steel, Tin-Plated
2. Contact: Brass, Stamped Pin Gold-Plated
3. Insulator: PBT & Fiber-Glass Reinforced UL94V-0
4. Current Rating: 5 Amps
5. Dielectric Strength: 1000 V for One Minute
6. Insulator Resistance: 1000 Megohms Min. at 500 VDC
7. Temperature: -50°C ~ +105°C

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION, AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.	TOLERANCES: Unless Otherwise Specified .X ± 0.35 [0.014] .XX ± 0.25 [0.010]	DRAWN BY:	DATE:	DRAWING TITLE: 25 Pin R/A PCB Mount D-Sub Plug			
		EKLAS ODISH	07/25/06				
		CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
		SAMI ALNADI	07/25/06	A	SPC15315	79K4909.DWG	A
		APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: mm [INCHES]	SHEET: 1 OF 1