
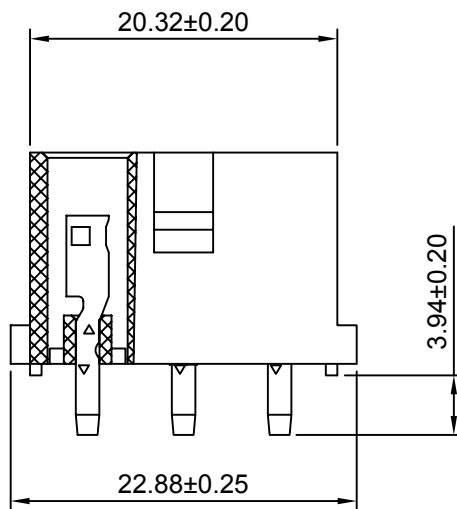


P.C.B LAYOUT

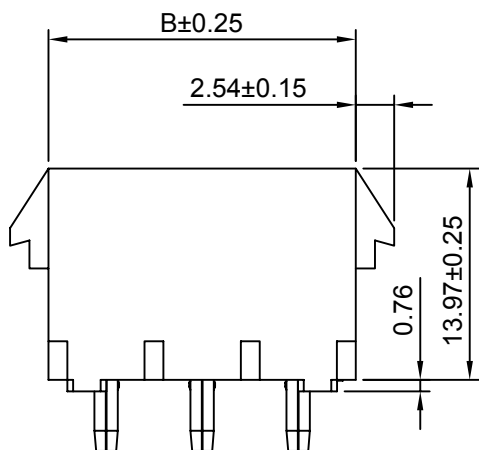

Ordering Information:

C6351WV-3xXP-F - \*\*


1 2

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2/Natural

V0:Nylon 66,UL94V-0/White

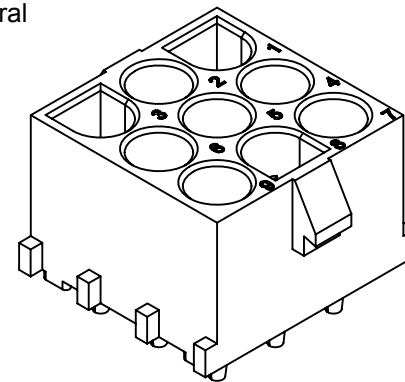

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3x2P	6.35	13.97	3x4P	19.05	26.67
3x3P	12.70	20.32	3x5P	25.40	33.02

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

General Tolerance	
x.xx≤0.25	ANGLE±
x.xx≤0.20	⊕
x.xxx≤0.15	⊖

Title :  
**6.35mm PITCH  
180° TRIPLE ROW WAFER  
-FEMALE TYPE**

DRAW NO : C6351WV-3xXP-F

REV  
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2009.05.10