


## Features

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ )

Symbol	Parameter	Limits	Unit
$V_{CC}$	Supply Voltage	50	V
$V_{IN}$	Input Voltage	-10 ~ +40	V
$I_O$	Output Current	50	mA
$I_{CM}$	Peak Collector Current	100	mA
$P_D$	Power Dissipation	150	mW
$T_J, T_{STG}$	Operation Junction and Storage Temperature Range	-55 ~ +150	°C



## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{I(off)}$	Input voltage	$V_{CC}=5V, I_O=100\mu\text{A}$	0.5			V
$V_{I(on)}$		$V_o=0.3V, I_O=10\text{mA}$			3	V
$V_{O(on)}$	Output voltage	$I_O/I_I=10\text{mA}/0.5\text{mA}$			0.3	V
$I_I$	Input current	$V_I=5V$			0.88	mA
$I_O(off)$	Output current	$V_{CC}=50V, V_I=0$			0.5	$\mu\text{A}$
$G_I$	DC current gain	$V_o=5V, I_O=5\text{mA}$	33			
$R_1$	Input resistance		7	10	13	k $\Omega$
$R_2/R_1$	Resistance ratio		0.8	1	1.2	
$f_T$	Transition frequency	$V_o=10V, I_O=5\text{mA}, f=100\text{MHz}$		250		MHz


## Ordering information

Product ID	Marking	Naming rule	Pack	Qty(PCS)
DTC114EE	24	<div style="border: 1px solid black; padding: 2px; text-align: center;"> <u>DTC114EE</u>  <small>产品名称 product name</small> </div>	SOT-523	3000

## Typical Characteristics

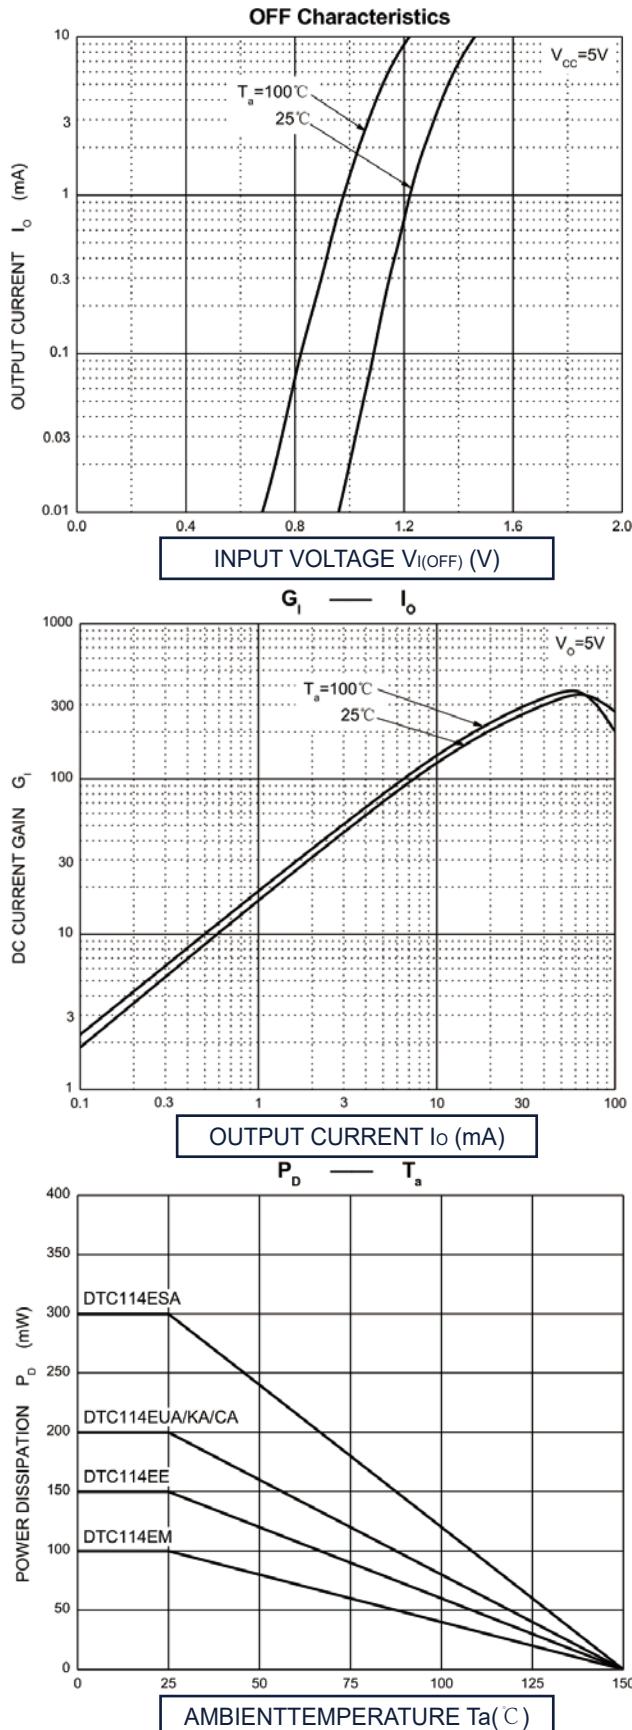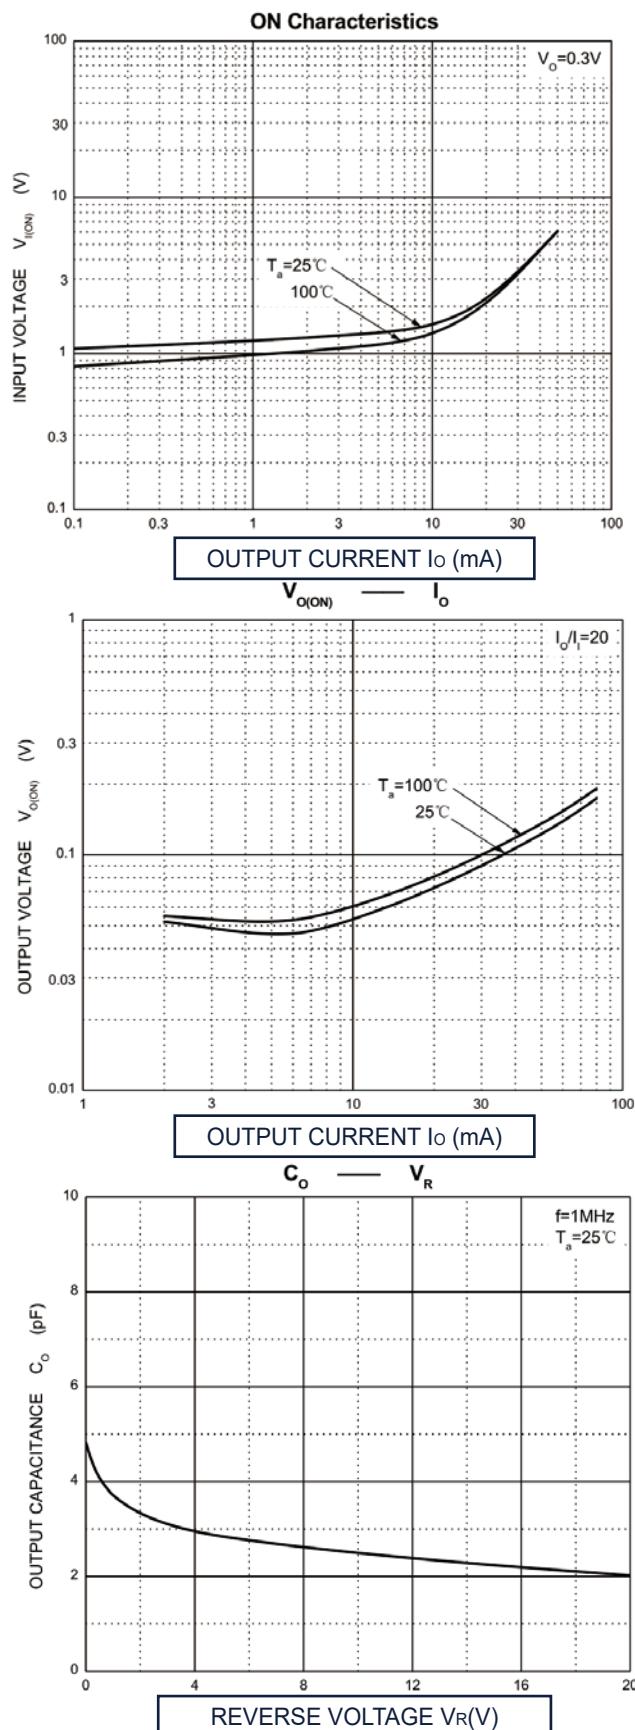

## SOT-523 Package Outline Dimensions

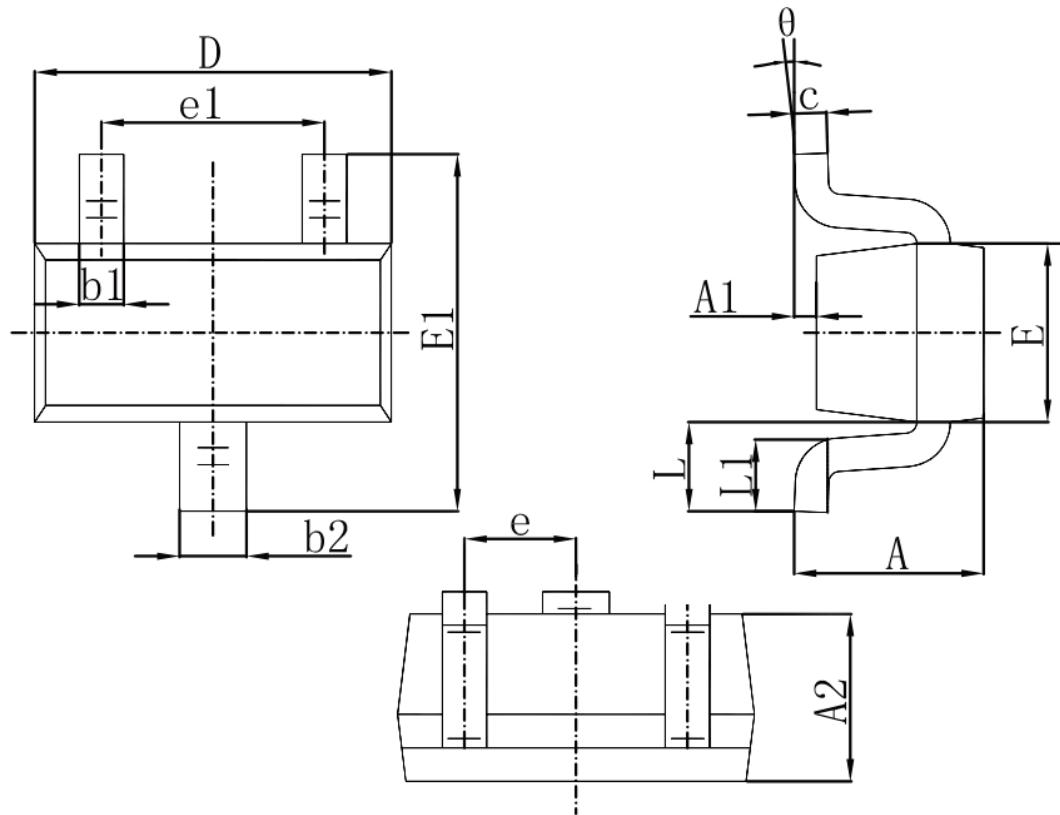

Symbol	Dimensions in Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°