

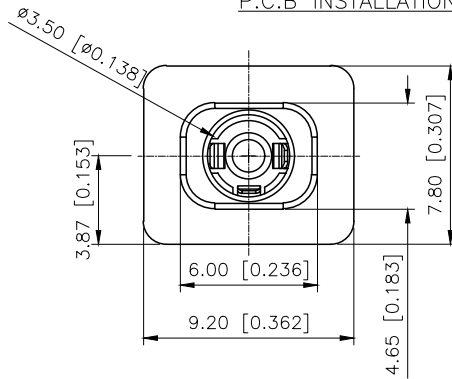
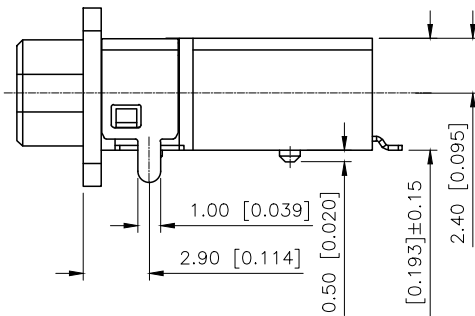

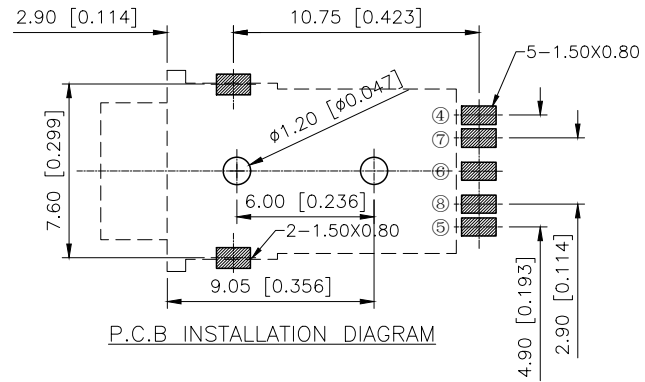
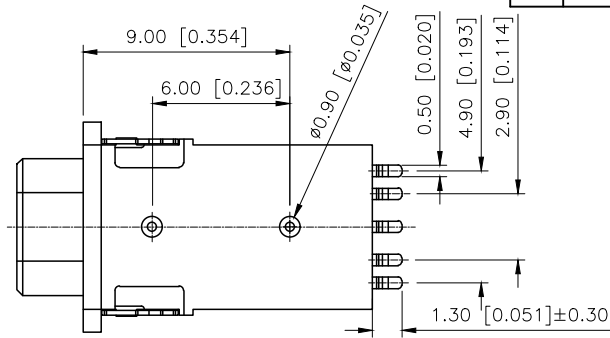
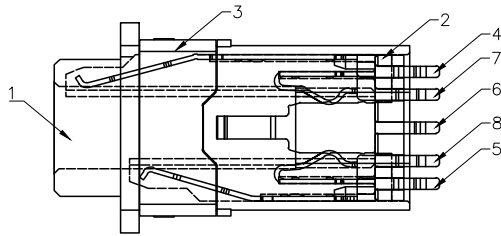


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		引脚长度尺寸变更, 图面升级整理图面	2024.12.24	阿树

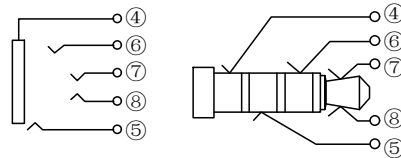

SPECIFICATIONS:
Temperature range: -25~+70℃
RATING: 30V 0.5A
Contact resistance: ≤10mΩ
Insulation resistance: ≥100MΩ DC250V
Withstanding voltage: AC 500V (50/60Hz)/min
Plugging force: 3~25N
Life test: 5000 MIN

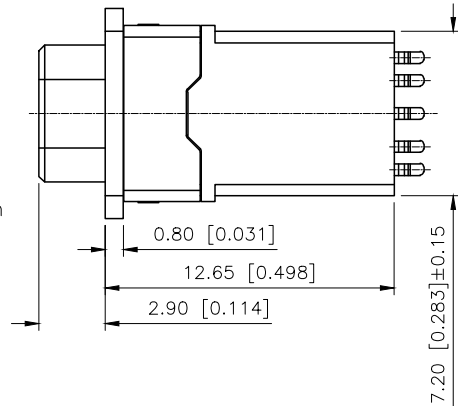

CIRCUIT DIAGRAM

8	Pin 5	1	Phosphor copper	Gold Flash
7	Pin 4	1	Phosphor copper	Gold Flash
6	Pin 3	1	Phosphor copper	Gold Flash
5	Pin 2	1	Phosphor copper	Gold Flash
4	Pin 1	1	Phosphor copper	Gold Flash
3	Bracket cover	1	Phosphor copper	Bright tin plating
2	Back cover	1	PA10T	Black
1	Pedestal	1	PA10T	Black
NO	NAME	QTY	MATERIAL	Remark

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-3254B
APPROVED		SIZE: A4	DWG NO.: