

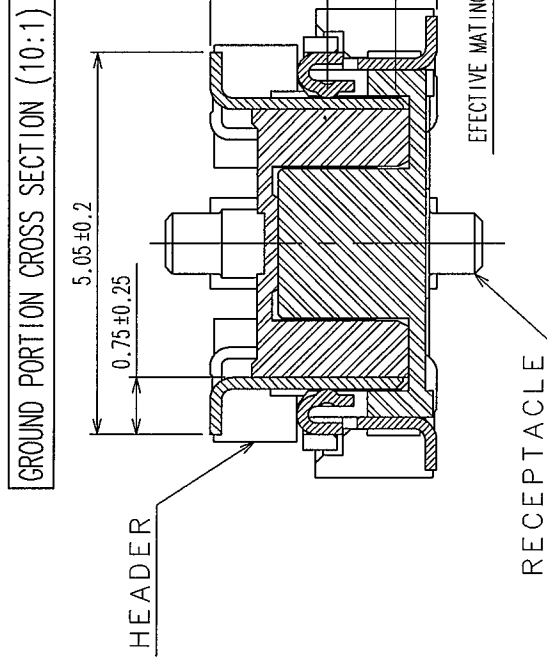
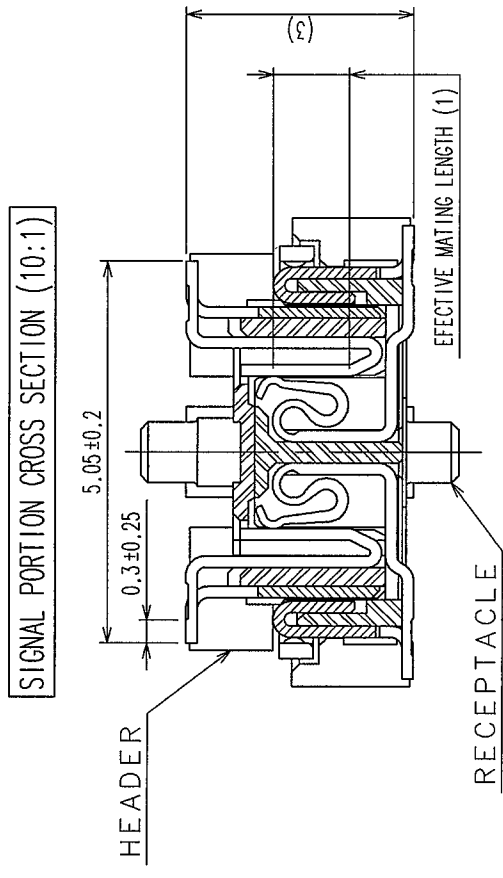


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				• •	△				• •
△				• •	△				• •
△				• •	△				• •

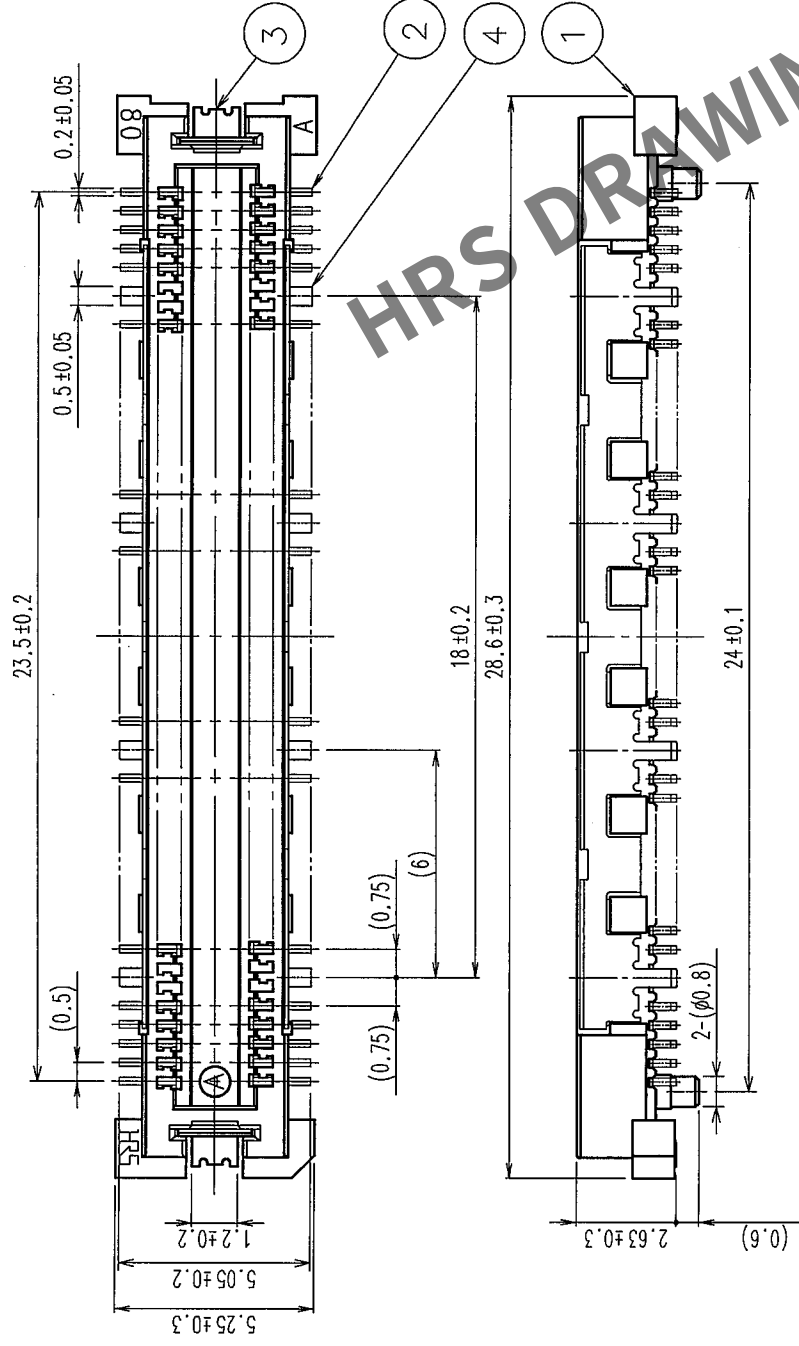

RECOMMENDED LAND PATTERN DIMENSION OF PCB

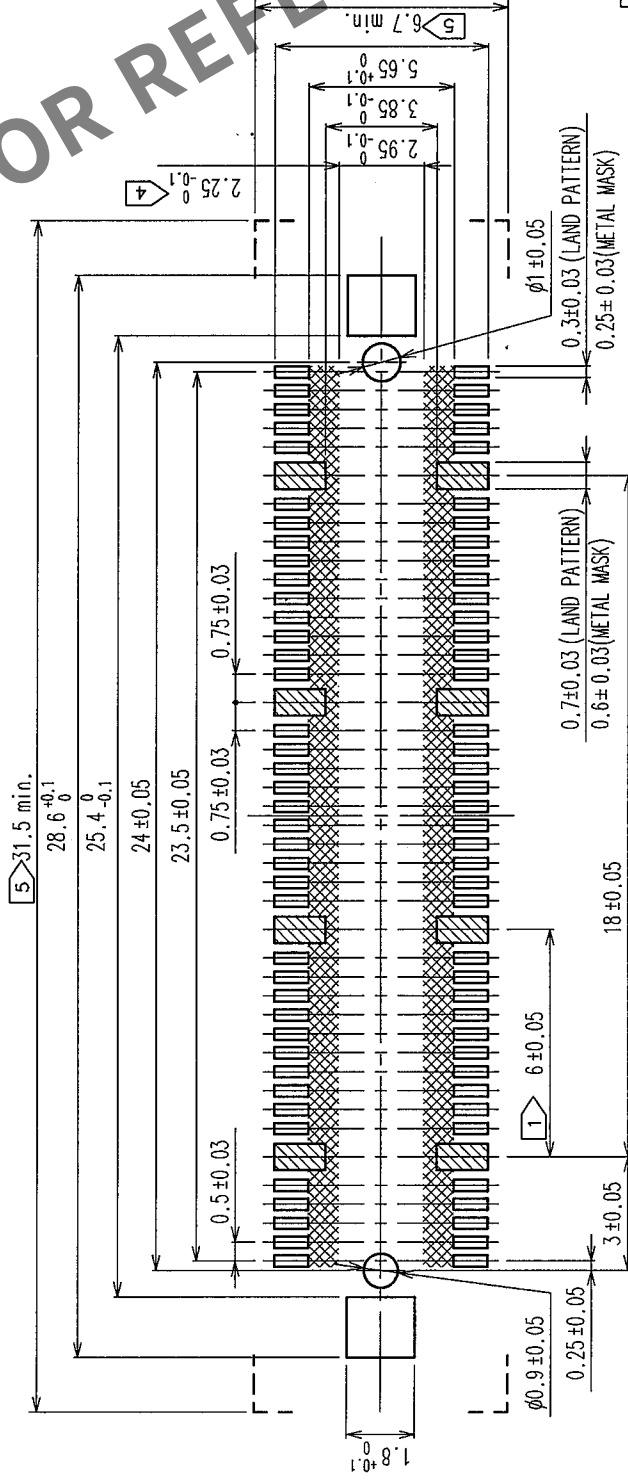

- NOTES
- 1  8 HATCHED  PARTS:GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY:0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR
LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
 - 4  DO NOT MOUNT OTHER DEVICES INSIDE  AREA ,OR MATING PAIR
CANNOT BE MATED.
 - 5 DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.

3,4		PHOSPHOR BRONZE	TIN PLATING		CONTACT AREA: GOLD 0.1mm min.	
1		LCP	BEIGE UL94V-0		MOUNTING AREA: GOLD FLASH	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	UNDER PLATING: NICKEL 1mm min.
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED
CL			T. NODA			
			'05.09.22			
DRAWING NO.		PART NO.		FINISH, REMARKS		
EDC3-152615-25		FX11A-80P/8-SVO.5(71)				
SCALE						
5 : 1						
UNITS						
mm						
HIROSE ELECTRIC CO., LTD.				CODE NO.		1/1
HRS				CL573-0603-7-71		