




Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

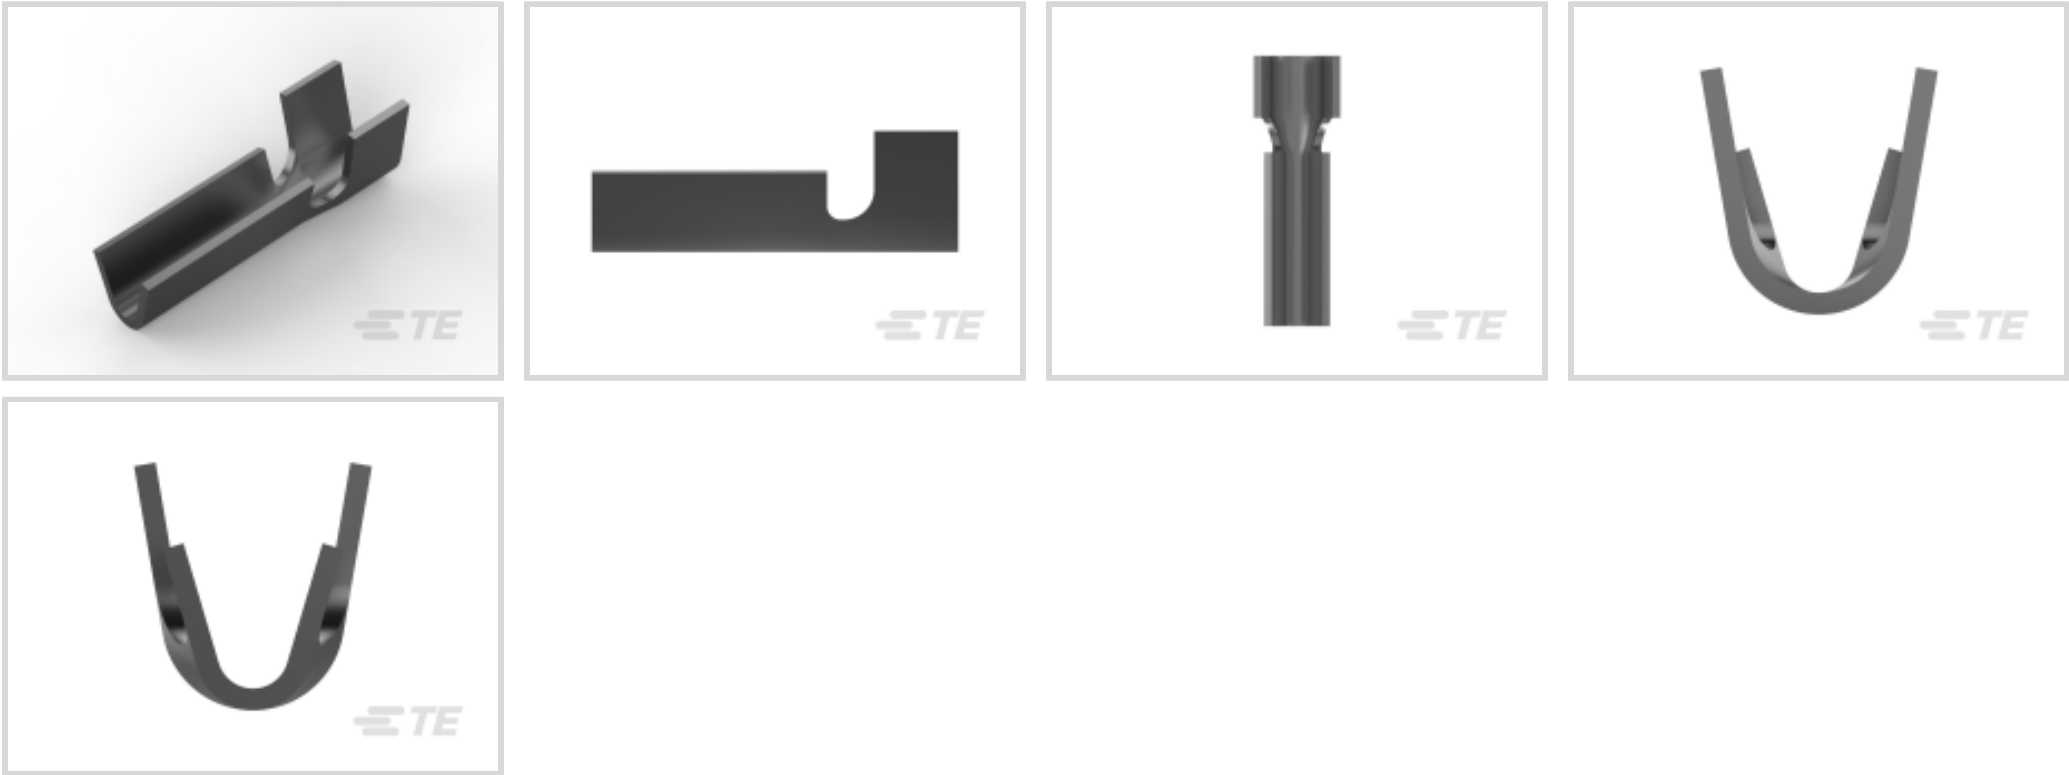

Crimp Wire Terminal Type: **Pin**

Compatible Insulation Diameter Range: 2 – 2.5 mm, 2.5 mm [.079 – .098 in, .098 in]

Wire Size: **642 – 1624 CMA**

Features

Product Type Features

Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Insulation Support

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Crimp Wire Terminal Type	Pin
Barrel Type	Open
Terminal Plating Material	Pre-Tin
Terminal Orientation	Straight

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Compatible Insulation Diameter Range	2 – 2.5 mm, 2.5 mm[.079 – .098 in][.098 in]
Wire Size	642 – 1624 CMA
Barrel Inside Diameter	1.05 mm[.041 in]
Terminal Material Thickness	.33 mm[.013 in]



Overall Product Length	10.9 mm[.43 in]
------------------------	-----------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Packaging Features

Packaging Quantity	15000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # 926867-2
AM WIRE PIN 13-10 .013 PTPB

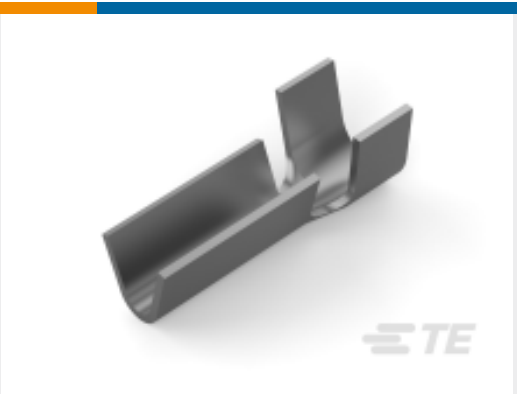

TE Part # 1-925552-0
AM WIRE PIN 20-17 AWG .0126 PTPPB



TE Part # 2150821-1
OCEAN_2.0_APPLICATOR-E-080F110F-REM



TE Part # 2150821-2
OCEAN_2.0_APPLICATOR-E-080F110F-REA




KIT
TE Part # 7-2150821-7
OCEAN_2.0_SPARE_PART_KIT-080F110F

Customers Also Bought



TE Part #1-338096-1
MICRO-MATCH COSI CONTACT

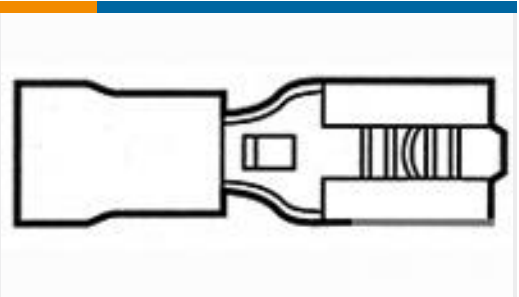

TE Part #9-160483-5
187 PIDG FASTON REC



TE Part #640445-7
07P MTA156 HDR ASSY FL/STR SN




TE Part #8-1676481-4
CPF 0603 24K 0.1% 25PPM 1K RL




TE Part #1-1393249-6
W58-XB1A4A-30=W58



TE Part #1-1623746-0
ER74 1K0 5% AMMO PK

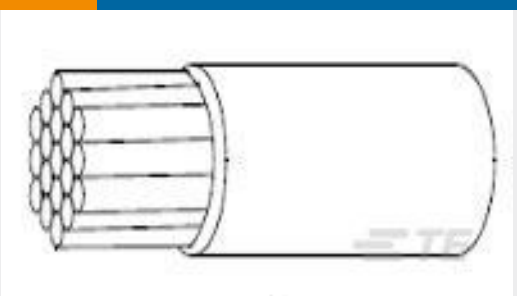

TE Part #216121-006
55A0111-16-2

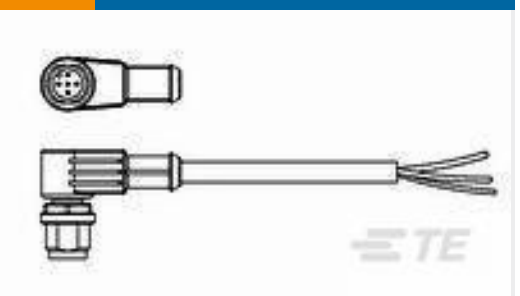

TE Part #1-2273088-1
M12 x 1.0 angled plug pigt A



TE Part #465333-1
SLUG BLADE

Documents



Product Drawings

AM WIRE PIN 22-18 .013 PTPB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_925667-2_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_925667-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_925667-2_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.