

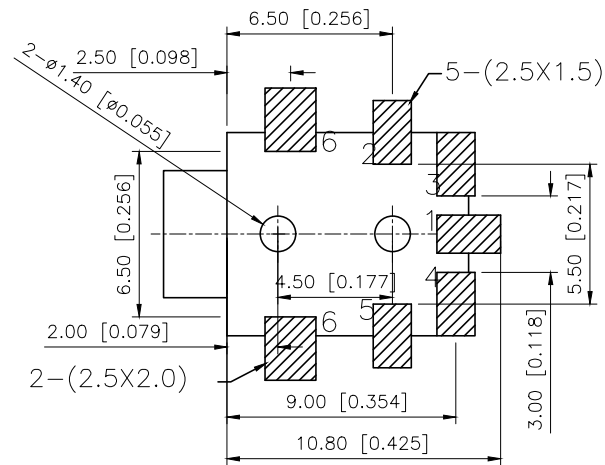
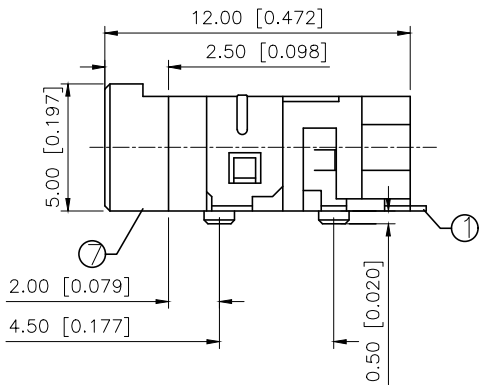


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.25	阿树

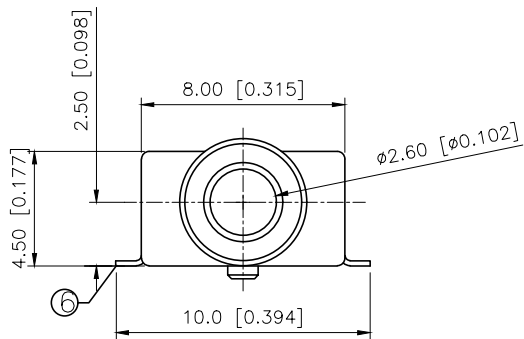



P.C.B LAYOUT
TOP VIEW



SCHEMATIC

SPECIFICATION

- 1.Rating:DC 30V 1.0A;
- 2.Contact resistance:≤30mΩ
- 3.Insulation resistance:≥100MΩ (DC250V)
- 4.Withstand voltage: 500VAC
- 5.Insertion and extraction force:3-20N;
- 6.life test:5,000 cycles,

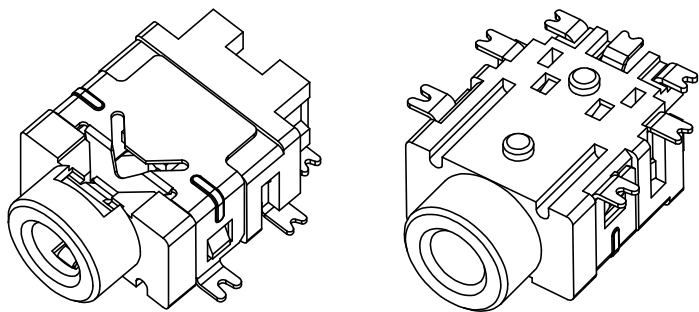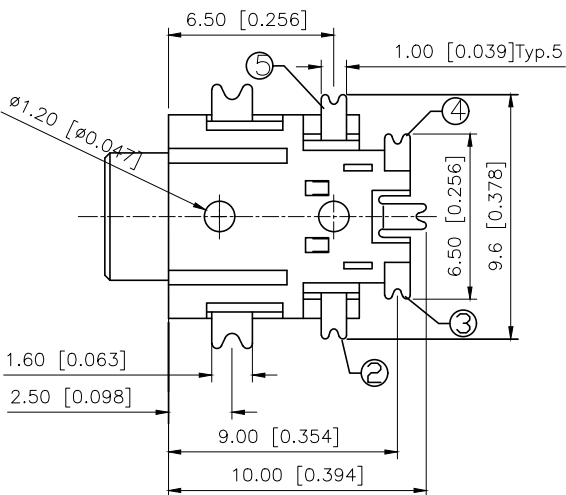

Plastic	PA9T	
Terminal 6	Phosphor Bronze	Silver
Terminal 5	Sus	Silver
Terminal 4	Brass	Silver
Terminal 3	Brass	Silver
Terminal 2	Sus	Silver
Terminal 1	Sus	Black
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-24X-SMT
APPROVED		SIZE: A4	DWG NO.: