

Description

The SX30N10D uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 4.5V. This device is suitable for use as a Battery protection or in other Switching application.

General Features

$V_{DS} = 100V$ $I_D = 30A$


$R_{DS(ON)} < 48m\Omega @ V_{GS}=10V$

Application



Automotive lighting

Load switch

Uninterruptible power supply



TO-251S-3L

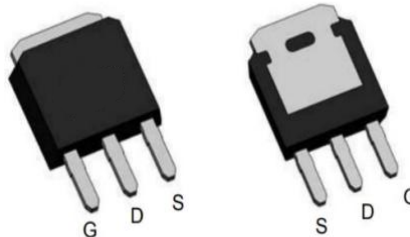

Absolute Maximum Ratings (TC=25°C unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_C=25^\circ C$	Drain Current, $V_{GS} @ 10V$	30	A
$I_D @ T_C=100^\circ C$	Drain Current, $V_{GS} @ 10V$	13	A
IDM	Pulsed Drain Current ¹	90	A
$P_D @ T_C=25^\circ C$	Total Power Dissipation	42	W
$P_D @ T_A=25^\circ C$	Total Power Dissipation ³	1.7	W
TSTG	Storage Temperature Range	-55 to 150	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ C$
$R_{\theta JA}$	Maximum Thermal Resistance, Junction-ambient	62.5	$^\circ C/W$
$R_{\theta JC}$	Maximum Thermal Resistance, Junction-case	3.6	$^\circ C/W$

Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
V(BR)DSS	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	107	-	V
IDSS	Zero Gate Voltage Drain Current	V _{DS} =100V, V _{GS} =0V,	-	-	1.0	μA
IGSS	Gate to Body Leakage Current	V _{DS} =0V, V _{GS} =±20V	-	-	±100	nA
VGS(th)	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0	1.5	2.2	V
RDS(on)	Static Drain-Source on-Resistance	V _{GS} =10V, I _D =10A	-	36	48	mΩ
		V _{GS} =4.5V, I _D =6A	-	39	55	mΩ
Ciss	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1.0MHz	-	1964	-	pF
Coss	Output Capacitance		-	90	-	pF
Crss	Reverse Transfer Capacitance		-	74	-	pF
Qg	Total Gate Charge	V _{DS} =80V, I _D =20A, V _{GS} =4.5V	-	20	-	nC
Qgs	Gate-Source Charge		-	3.1	-	nC
Qgd	Gate-Drain(“Miller”) Charge		-	14	-	nC
td(on)	Turn-on Delay Time	V _{DS} =80V, I _D =20A, R _G =3.1Ω, V _{GS} =4.5V	-	11	-	ns
tr	Turn-on Rise Time		-	91	-	ns
td(off)	Turn-off Delay Time		-	40	-	ns
tr	Turn-off Fall Time		-	71	-	ns
IS	Maximum Continuous Drain to Source Diode Forward Current		-	-	30	A
ISM	Maximum Pulsed Drain to Source Diode Forward Current		-	-	80	A
VSD	Drain to Source Diode Forward Voltage	V _{GS} =0V, I _S =20A	-	-	1.2	V
trr	Body Diode Reverse Recovery Time	I _F =20A, dI/dt=100A/μs	-	64	-	ns
Qrr	Body Diode Reverse Recovery Charge		-	152	-	nC

Note :

- 1、The data tested by surface mounted on a 1 inch 2 FR-4 board with 2OZ copper.
- 2、The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%
- 3、The EAS data shows Max. rating . The test condition is VDD=72V,VGS=10V,L=0.1mH,IAS=10A
- 4、The power dissipation is limited by 150°C junction temperature
- 5、The data is theoretically the same as I D and I DM , in real applications , should be limited by total power dissipation.

Typical Characteristics

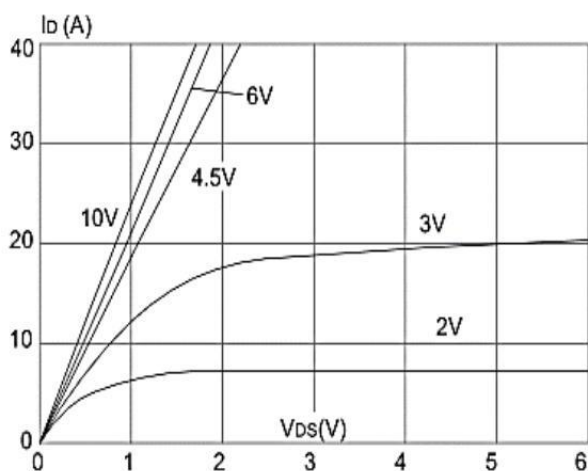


Figure1: Output Characteristics

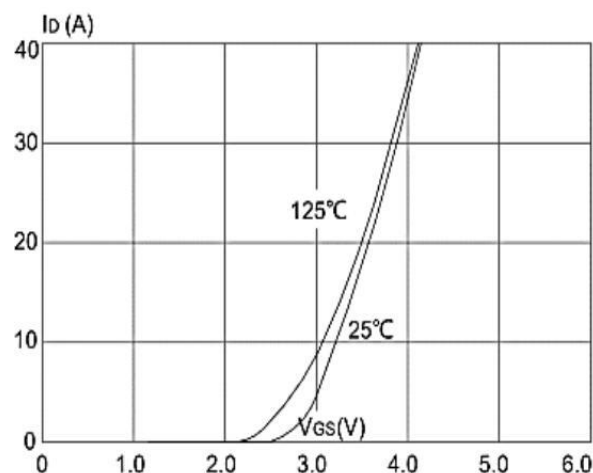


Figure 2: Typical Transfer Characteristics

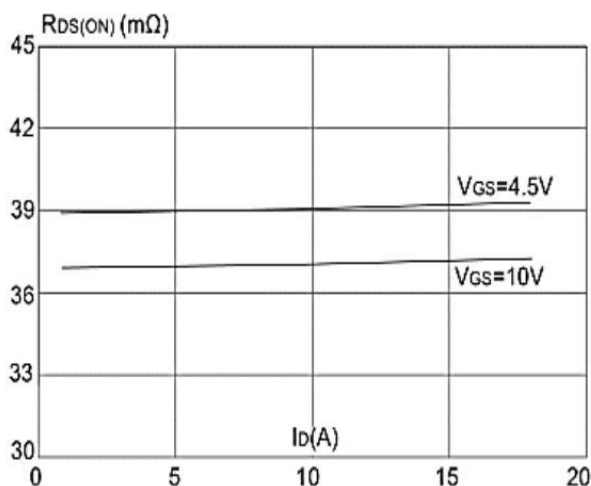


Figure 3: On-resistance vs. Drain Current

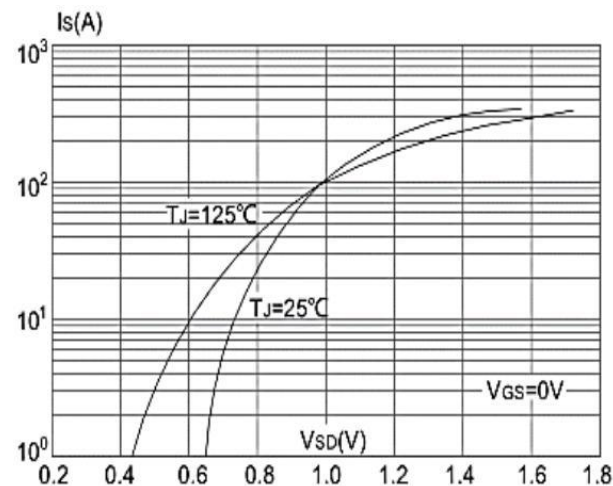


Figure 4: Body Diode Characteristics

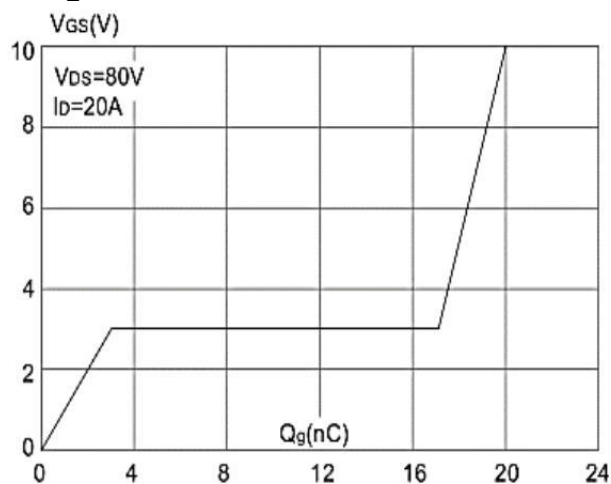


Figure 5: Gate Charge Characteristics

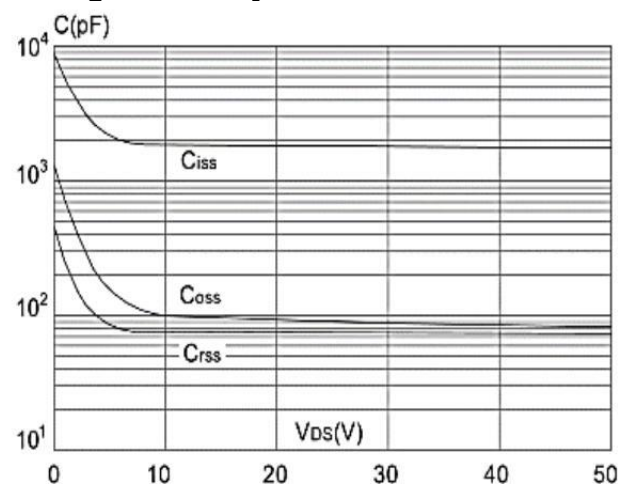


Figure 6: Capacitance Characteristics

Typical Characteristics

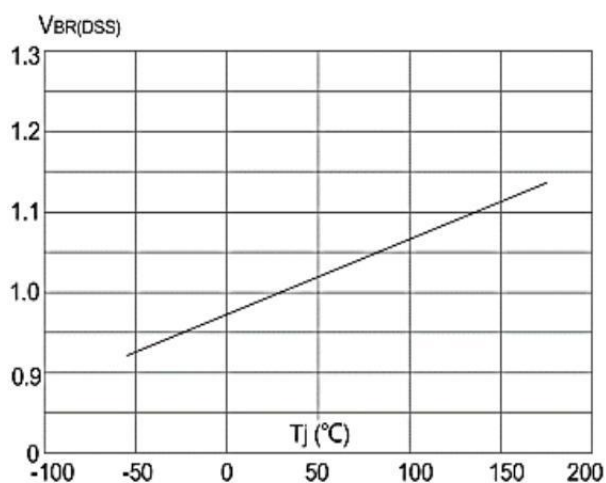


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

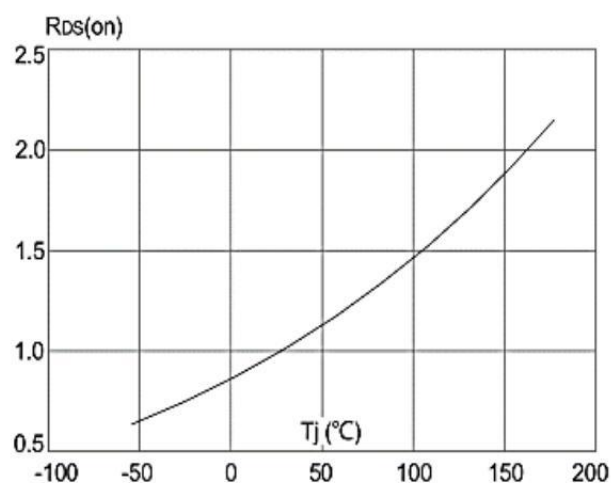


Figure 8: Normalized on Resistance vs. Junction Temperature

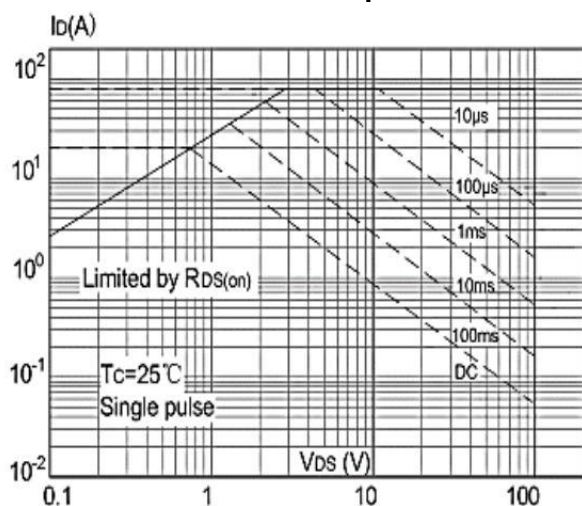


Figure 9: Maximum Safe Operating Area vs. Case Temperature

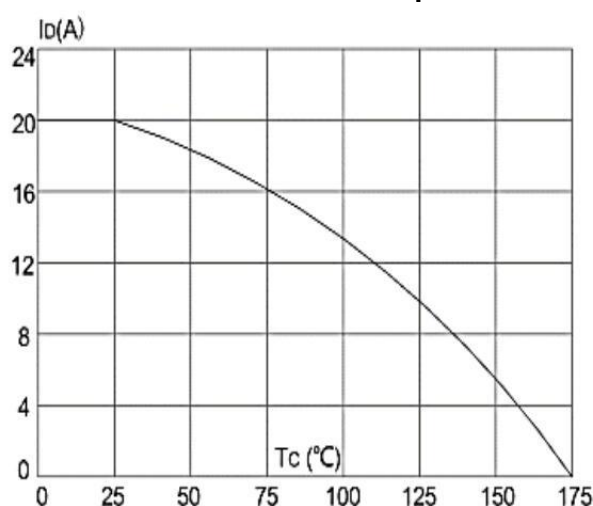


Figure 10: Maximum Continuous Drain Current


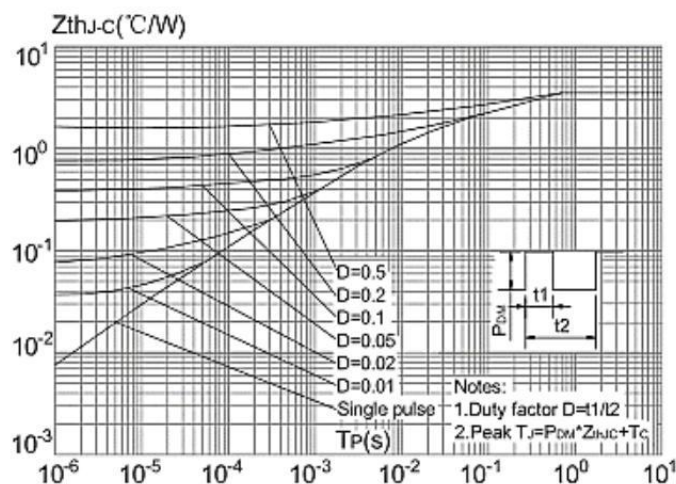


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Case

Package Mechanical Data-TO-251S-3L

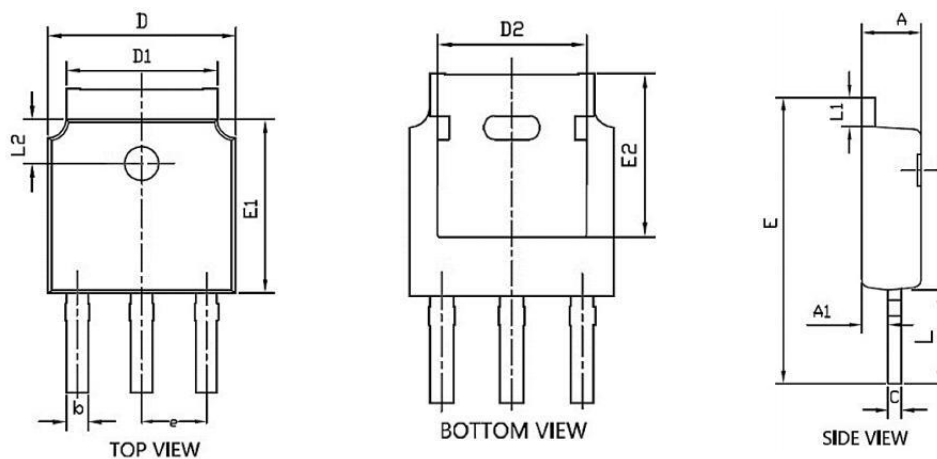

Symbol	Common		
	mm		
	Mim	Nom	Max
A	2.2	2.3	2.4
A1	0.9	1.0	1.1
b	0.66	0.76	0.86
C	0.46	0.52	0.58
D	6.50	6.6	6.7
D1	5.15	5.3	5.45
D2	4.6	4.8	4.95
E	10.4	---	11.5
E1	6.0	6.1	6.2
E2	5.400REF		
e	2.286BSC		
L	3.5	4.0	4.3
L1	0.9	---	1.27
L2	1.4	---	1.9

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
TAPING	TO-251S-3L		4000