

1598268

https://www.phoenixcontact.com/us/products/1598268

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Coupler connector, series: RC, straight plastic-sheathed, shielded: yes, Screw locking mechanism, No. of pos.: 12, Direction of rotation: Counter direction, contact connection type: Pin, Crimp connection, coding: N

Commercial data

Item number	1598268
Packing unit	20 pc
Minimum order quantity	20 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAFG
GTIN	4046356219976
Weight per piece (including packing)	41.4 g
Weight per piece (excluding packing)	41.4 g
Customs tariff number	85366990
Country of origin	DE



1598268

https://www.phoenixcontact.com/us/products/1598268

Technical data

Notes

	Order information:	Order crimp contacts Ø 1 mm separately
Product properties		
	Product type	Circular connector (cable-side)

Connector

Insulating body

Note	Order information: Order crimp contacts Ø 1 mm separately
Coding	N
Connection method	Crimp connection
Contact switching type	Pin
Application	Signal
Number of positions	12
Direction of rotation	Counter direction
Connection profile	12
Contact diameter Power contacts	1 mm
Rated current Power contacts	8 A
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing

Housing material	Metal
Type of locking	Screw locking mechanism
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

Environmental and real-life conditions

Ambient conditions

Ambient temperature (storage/transport)	15 °C 25 °C
Permissible humidity (storage/transport)	50 % 65 %




https://www.phoenixcontact.com/us/products/1598268



Drawings

Schematic diagram

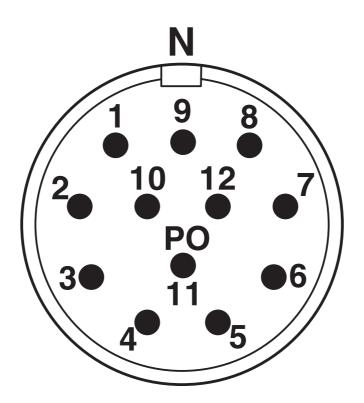

Connector pin assignment



1598268

https://www.phoenixcontact.com/us/products/1598268

Classifications

ECLASS

UNSPSC 21.0

ECLASS-1	1.0	27440102
ECLASS-1	2.0	27440116
ECLASS-1	3.0	27440116
ETIM		
ETIM 9.0		EC002635
UNSPSC		

39121400



1598268

https://www.phoenixcontact.com/us/products/1598268

Environmental product compliance

	JR	ı _ ı	10
нι		n	⊣.~

Fulfills EU RoHS substance requirements	Yes, No exemptions	
China RoHS		
Environment friendly use period (EFUP)	EFUP-E	
	No hazardous substances above the limits	
EU REACH SVHC		
REACH candidate substance (CAS No.)	No substance above 0.1 wt%	



1598268

https://www.phoenixcontact.com/us/products/1598268

Accessories

RC-11P2000 - Crimp contact

1596770

https://www.phoenixcontact.com/us/products/1596770



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range: $0.08~\text{mm}^2$... $0.22~\text{mm}^2$, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240882

RC-12P2000 - Crimp contact

1597862

https://www.phoenixcontact.com/us/products/1597862



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range: $0.14~\text{mm}^2$... $0.56~\text{mm}^2$, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240882



1598268

https://www.phoenixcontact.com/us/products/1598268

RC-1KP2000 - Crimp contact

1602996

https://www.phoenixcontact.com/us/products/1602996



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range: $0.5~\text{mm}^2$... 1 mm², Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241571

RC-22P2000 - Crimp contact

1603321

https://www.phoenixcontact.com/us/products/1603321



Crimp contact, Pin, rolled, Single contact, contact diameter: 1 mm, crimp range: $0.22~\text{mm}^2$... $0.56~\text{mm}^2$, Single contact, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1~%)



1598268

https://www.phoenixcontact.com/us/products/1598268

RC-22P2300 - Crimp contact

1603324

https://www.phoenixcontact.com/us/products/1603324



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range: $0.22~\text{mm}^2$... $0.56~\text{mm}^2$, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

RC-22P2400 - Crimp contact

1603325

https://www.phoenixcontact.com/us/products/1603325



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range: $0.22~\text{mm}^2$... $0.56~\text{mm}^2$, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1~%)



1598268

https://www.phoenixcontact.com/us/products/1598268

RC-21P2000 - Crimp contact

1603310

https://www.phoenixcontact.com/us/products/1603310



Crimp contact, Pin, rolled, Single contact, contact diameter: 1 mm, crimp range: 0.08 $\rm mm^2 \dots 0.22~mm^2$, Single contact

RC-21P2300 - Crimp contact

1603313

https://www.phoenixcontact.com/us/products/1603313



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range: $0.08~\text{mm}^2$... $0.22~\text{mm}^2$



1598268

https://www.phoenixcontact.com/us/products/1598268

RC-21P2400 - Crimp contact

1611637

https://www.phoenixcontact.com/us/products/1611637



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range: 0.08 $\rm mm^2$... 0.22 $\rm mm^2$

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com