
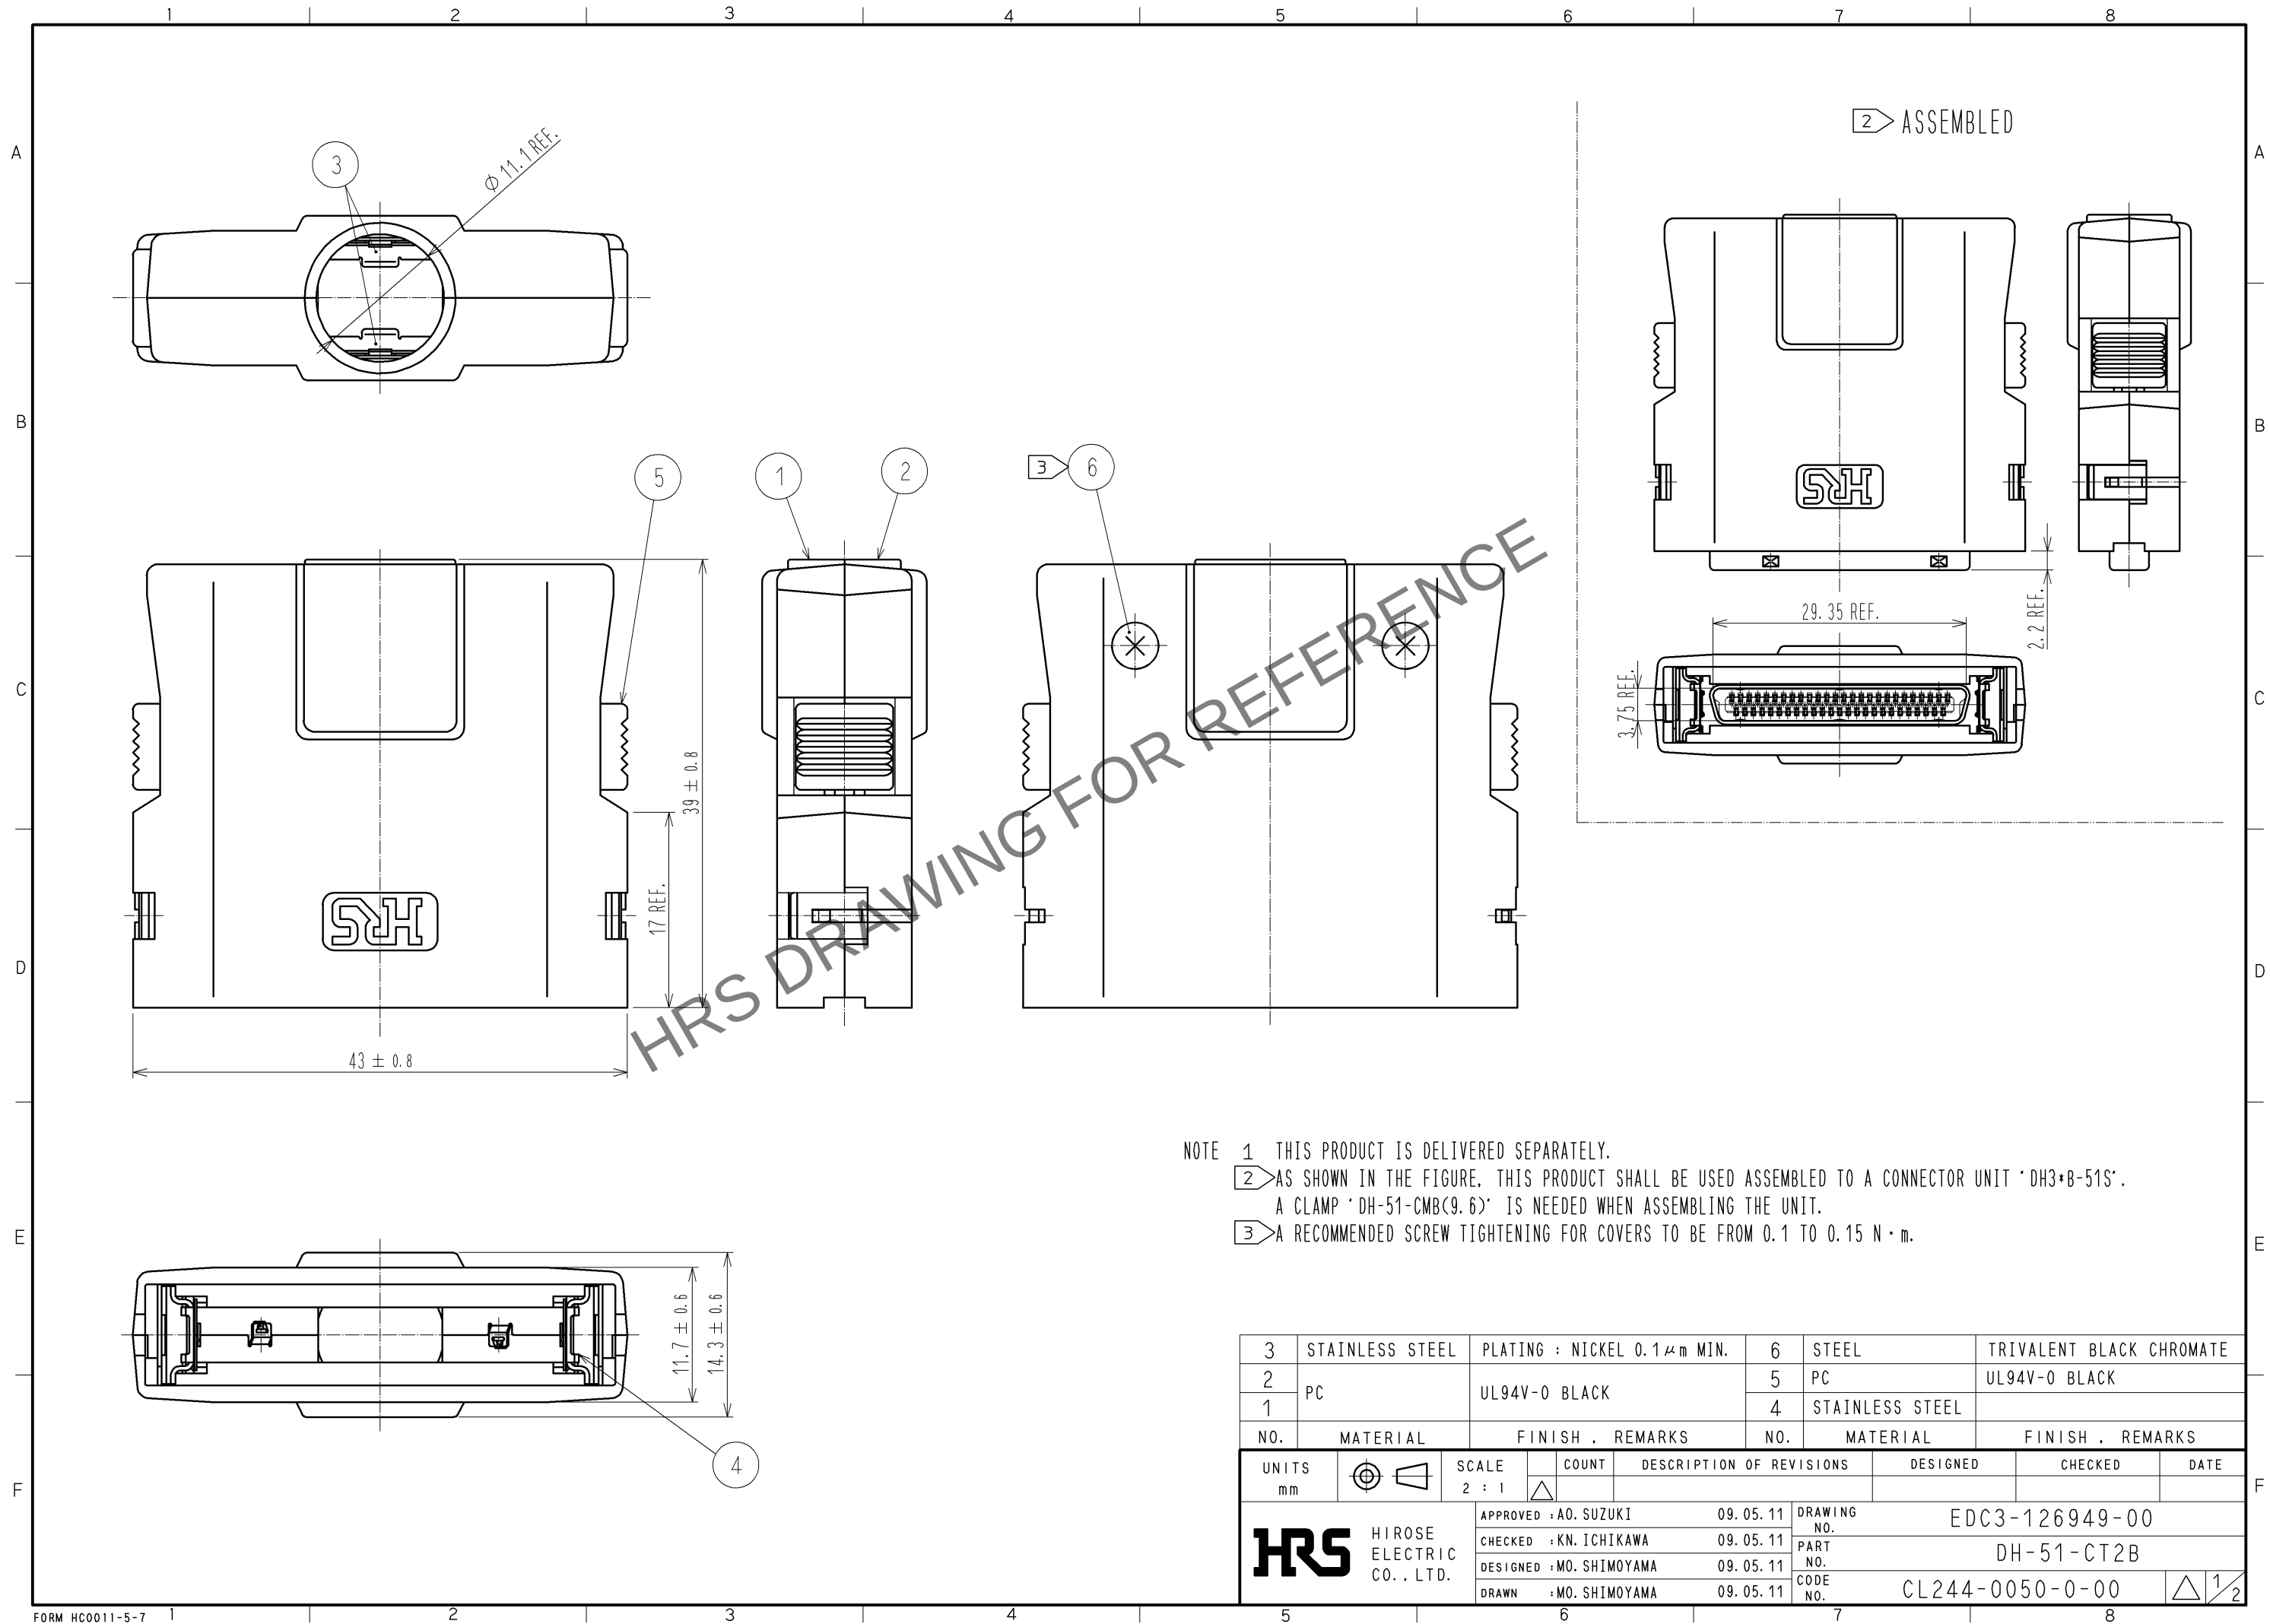



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTE 1 THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3*B-51S'.
A CLAMP 'DH-51-CMB(9.6)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 A RECOMMENDED SCREW TIGHTENING FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

3	STAINLESS STEEL	PLATING : NICKEL 0.1μm MIN.	6	STEEL	TRIVALENT BLACK CHROMATE		
2	PC	UL94V-0 BLACK	5	PC	UL94V-0 BLACK		
1			4	STAINLESS STEEL			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO. , LTD.	APPROVED : AO. SUZUKI		09. 05. 11	DRAWING NO.	EDC3-126949-00		
	CHECKED : KN. ICHIKAWA		09. 05. 11	PART NO.	DH-51-CT2B		
	DESIGNED : MO. SHIMOYAMA		09. 05. 11	CODE NO.	CL244-0050-0-00		
	DRAWN : MO. SHIMOYAMA		09. 05. 11		 1/2		

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

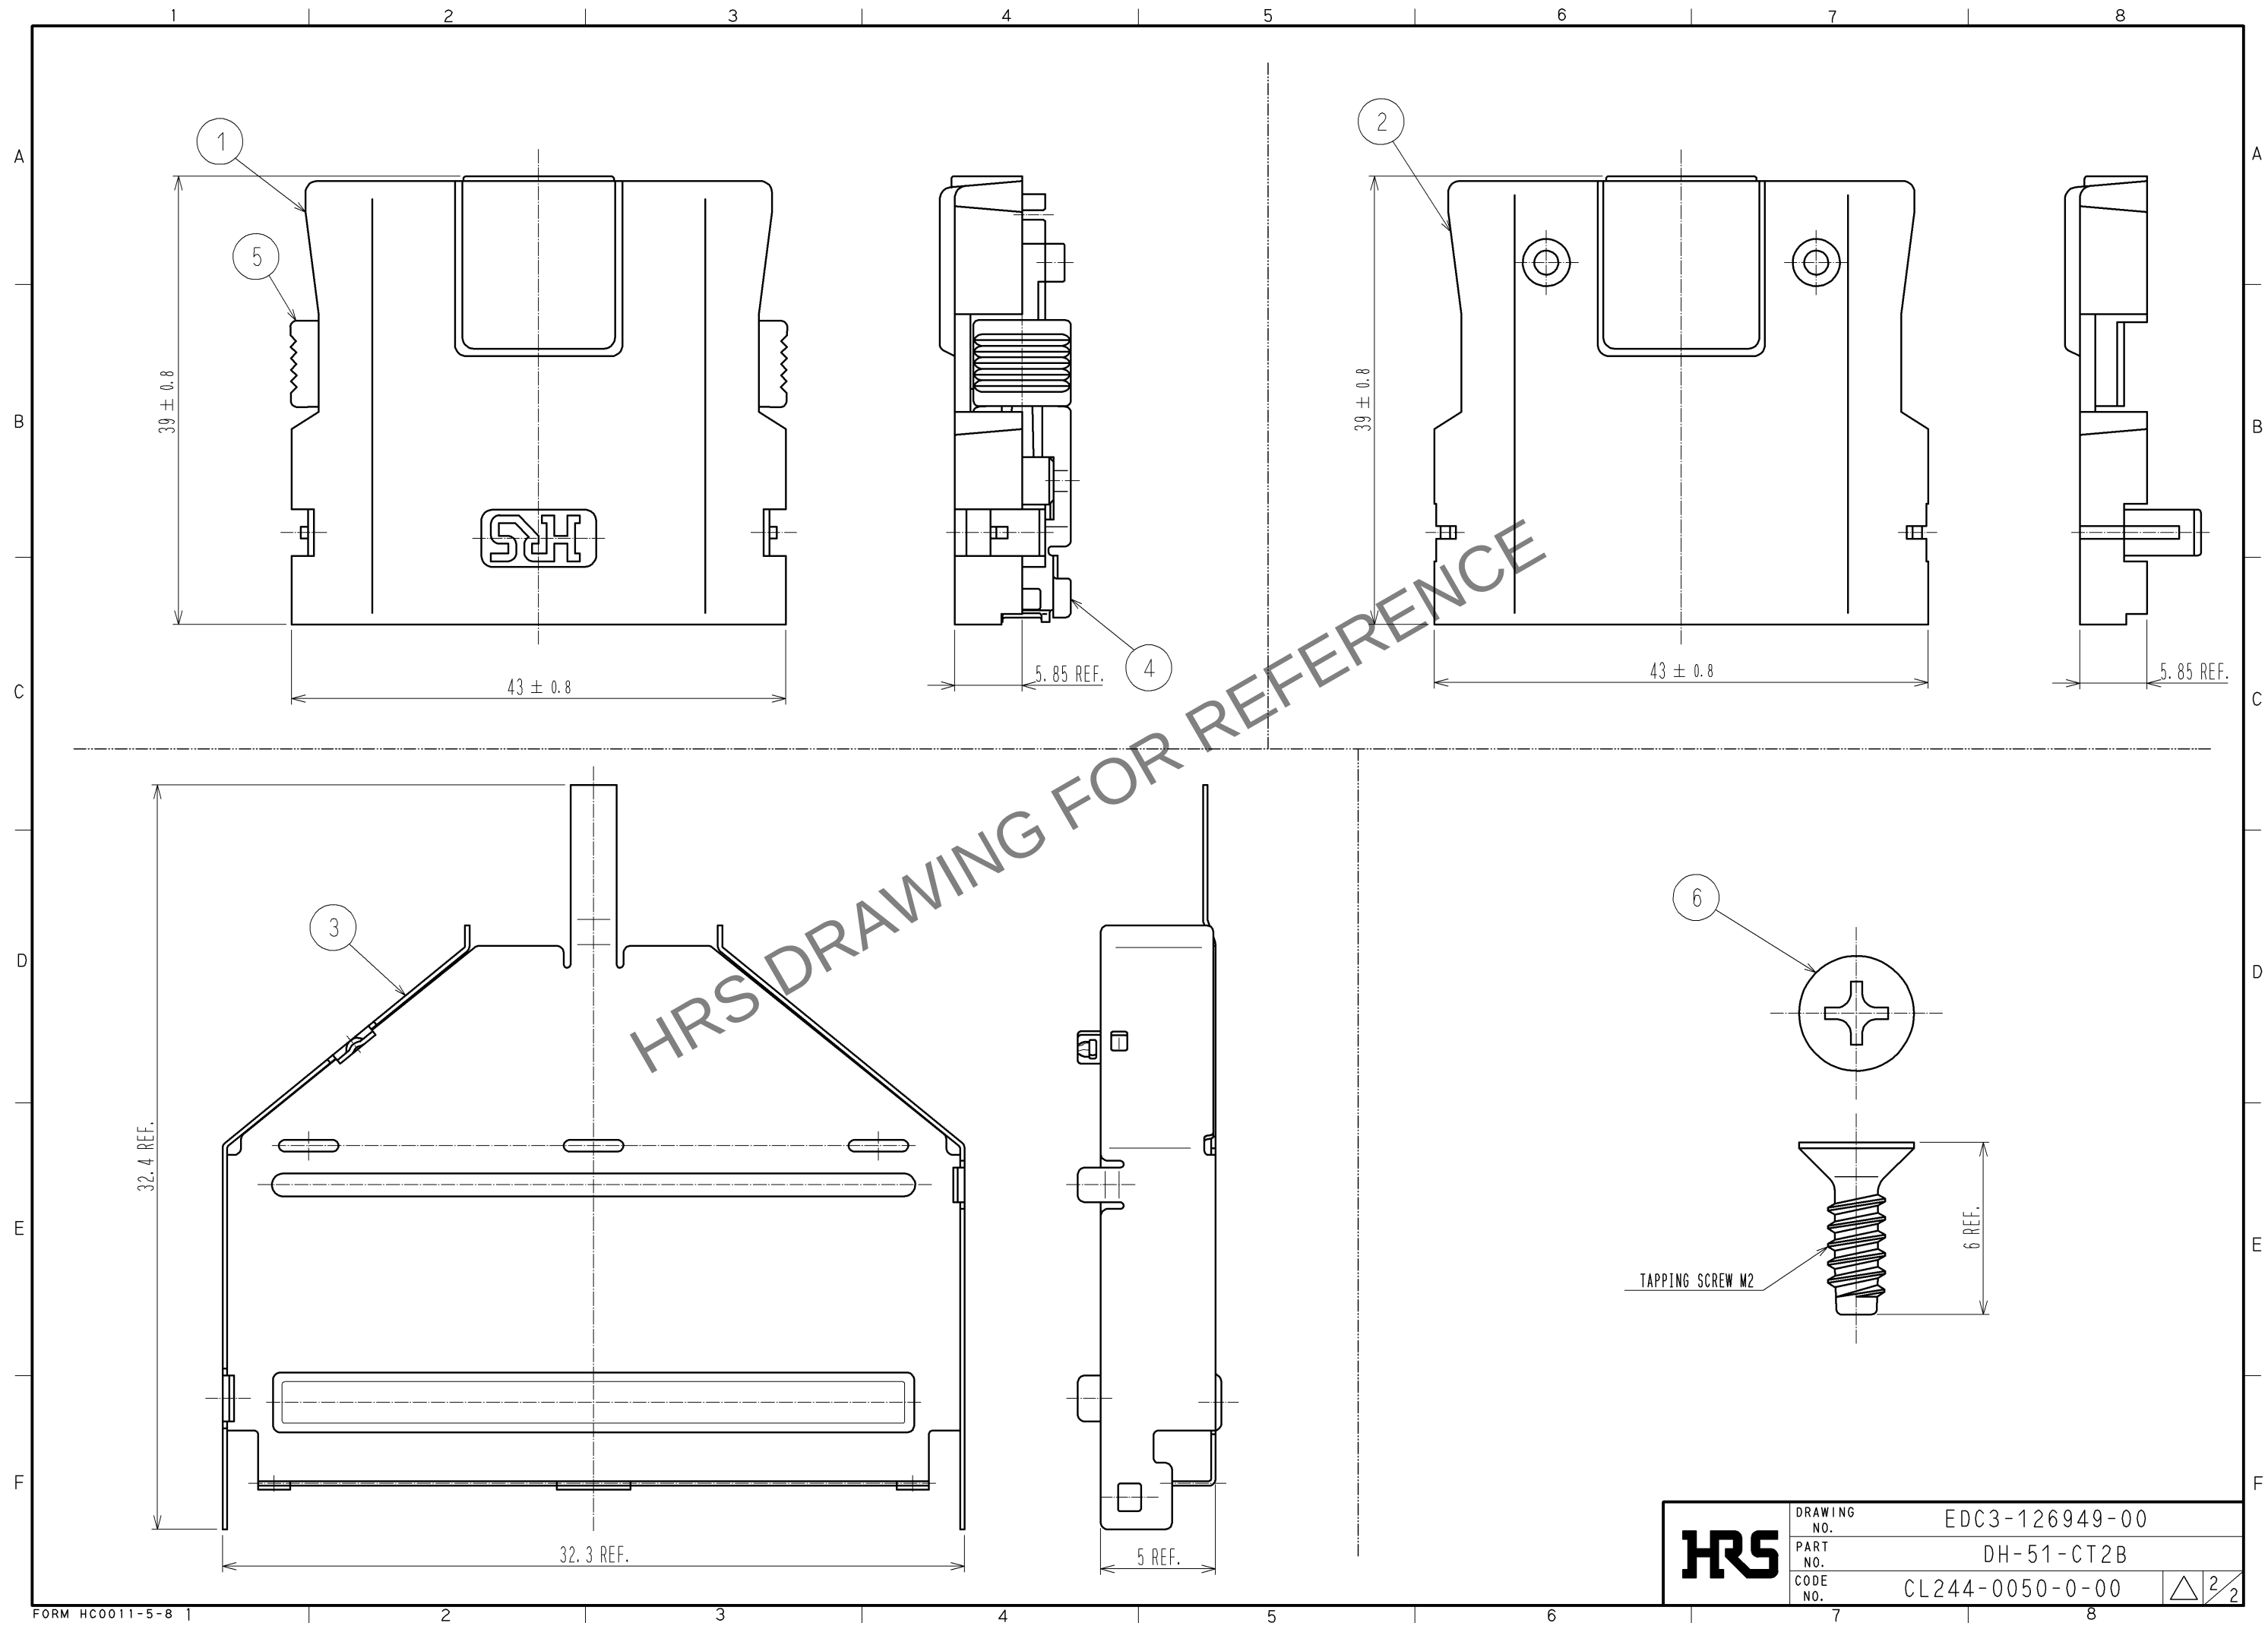

HRS	DRAWING NO.	EDC3-126949-00	
	PART NO.	DH-51-CT2B	
	CODE NO.	CL244-0050-0-00	△2/2