




AMP Mini CT

TE Internal #: 1-353908-4
Housing, Receptacle, Wire-to-Panel / Wire-to-Wire / Wire-to-Board,
14 Position, .059 in [1.5 mm] Centerline, Crimp, 1 Row, White, AMP
Mini CT

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >
Mini Common Termination (CT) Housings

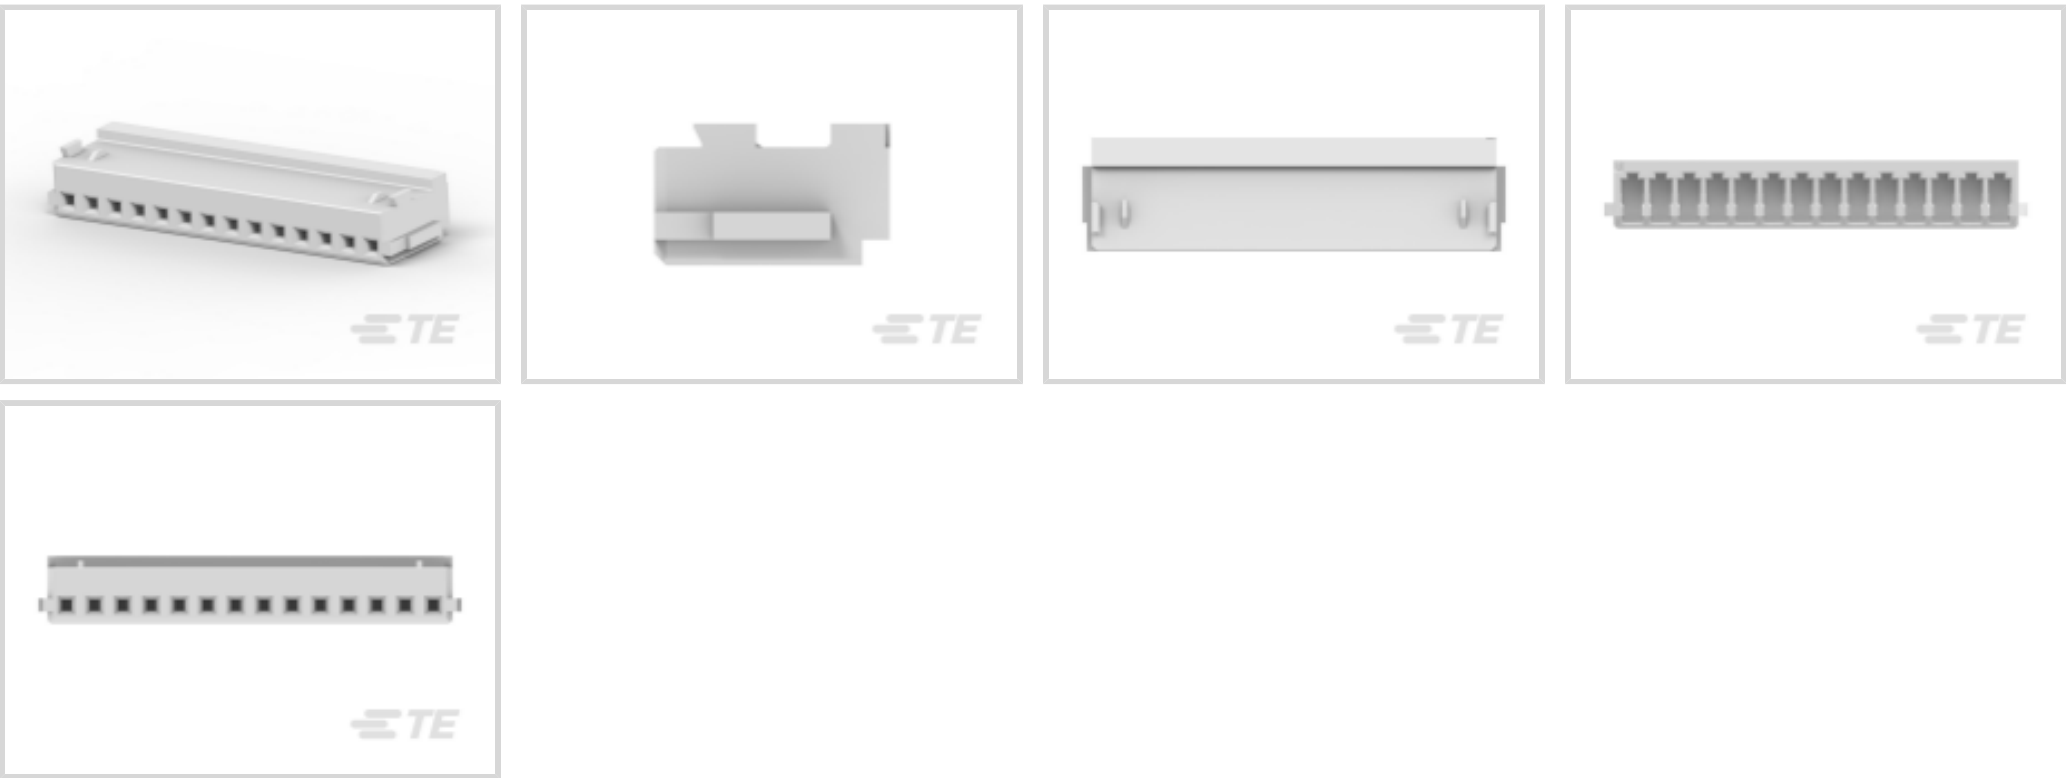

Connector Product Type: **Housing**
Connector & Housing Type: **Receptacle**
Connector System: **Wire-to-Board, Wire-to-Panel, Wire-to-Wire**
Number of Positions: **14**
Centerline (Pitch): **1.5 mm [.059 in]**

[All Mini Common Termination \(CT\) Housings \(38\)](#)

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board, Wire-to-Panel, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	14
Number of Rows	1

Electrical Characteristics

Insulation Resistance	500 MΩ
Operating Voltage	50 VAC



Body Features

Primary Product Color	White
-----------------------	-------

Contact Features

Contact Layout	Inline
Contact Type	Socket
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Detent
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Entry Configuration	Both Ends Closed
Housing Material	Nylon 66
Centerline (Pitch)	1.5 mm[.059 in]

Dimensions

Connector Length	22.5 mm[.886 in]
Connector Height	6 mm[.236 in]
Connector Width	3.6 mm[.141 in]
Compatible Insulation Diameter Range	.85 – 1.05 mm[.033 – .041 in]
Wire Size	.05 – .22 mm²

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard	CSA, UL



UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	1000
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-AM7053-C7671
Mini Common Termination Contacts



TE Part # 1-292206-4
MINI CT SGL DIP H 14P NAT





TE Part # 2-292208-8
MINI CT D/R DIP 28P V NAT





TE Part # 1-292207-4
MINI CT SGL DIP V 14P NAT

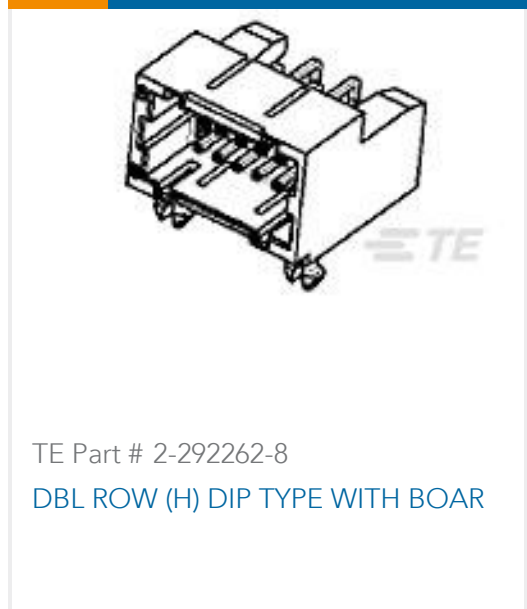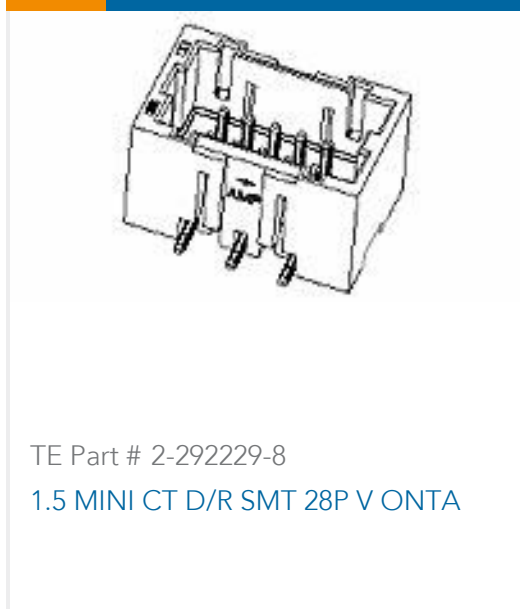

 TE Part # 1-292215-4 MINI CT SGL RELAY 14P NAT	 TE Part # 2-353294-8 AMP MINI D/R HDR HSG 28P NATU	 TE Part # 3-292207-4 MINI CT SGL DIP V 14P BLACK	 TE Part # 1-292230-4 1.5 MINI CT SGL V SMT W/BOSS 1
 TE Part # 1-292227-4 1.5 MINI CT SGL H SMT W BOSS 1	 TE Part # 2-1612257-4 REC ASSY 14P ,MINI CT DC DRAW	 TE Part # 7-1612256-4 PLUG ASSY 14P ,MINI CT DC DRAW	 TE Part # 2-292262-8 DBL ROW (H) DIP TYPE WITH BOAR
 TE Part # 2-292216-8 MINI CT D/R RELAY 28P V NAT	 TE Part # 1-292228-4 1.5 MINI CT SGL H SMT W/O BOSS	 TE Part # 1-292223-4 1.5 MINI CT LATTICE PLUG/KIT K	 TE Part # 1-292231-4 1.5 MINI CT SGL V SMT W/O BOSS
 TE Part # 1-292232-4 1.5 MINI CT SGL V SMT W/BOS,PO	 TE Part # 1-292246-4 1.5 MINI CT LATTICE REC KEY A	 TE Part # 2-292229-8 1.5 MINI CT D/R SMT 28P V ONTA	 TE Part # 7-292208-8 MINI CT D/R DIP 28P V BLUE

Also in the Series | AMP Mini CT

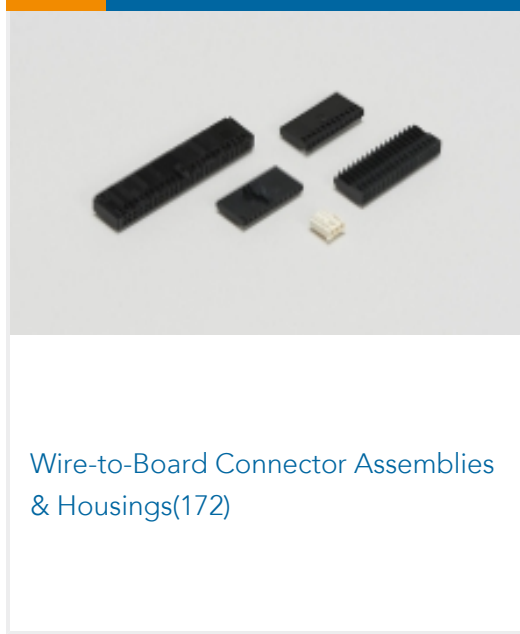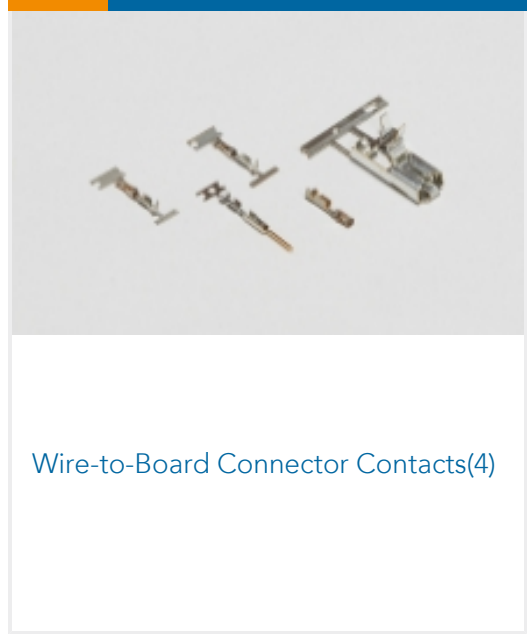 Connector Hardware(10)	 PCB Headers & Receptacles(332)	 Wire-to-Board Connector Assemblies & Housings(172)	 Wire-to-Board Connector Contacts(4)
---	--	---	--

Customers Also Bought





TE Part #1-353908-0
Mini Common Termination (CT)
Housings



TE Part #1-179228-2
CT CRIMP-2 REC HSG 12P NATURAL



TE Part #292254-5
CT RELAY HDR ASSY 5P NAT



TE Part #292254-6
CT RELAY HDR ASSY 6P NAT



TE Part #292215-8
MINI CT SGL RELAY 8P NAT




TE Part #3-353294-4
AMP MINI D/R HDR HSG 34P NATU



TE Part #3-353294-0
AMP MINI D/R HDR HSG 30P NATU



TE Part #3-353293-5
1.5MM CT MT REC ASSY 15P BLACK

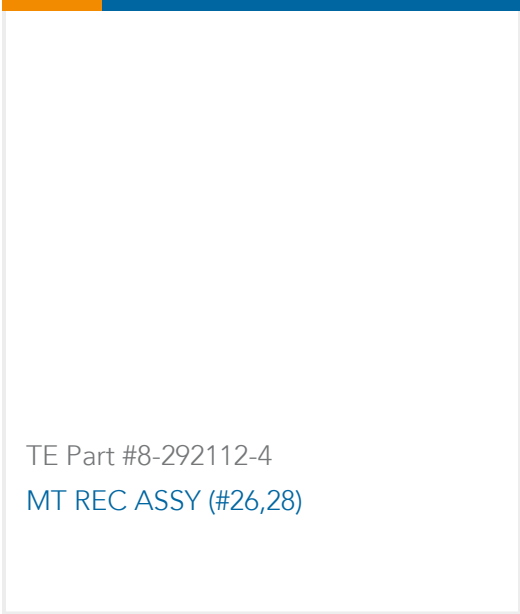

TE Part #8-292112-4
MT REC ASSY (#26,28)

Documents

Product Drawings
CT REC HSG 14P CRIMP TYPE WHIT
English

CAD Files
Customer View Model
ENG_CVM_CVM_1-353908-4_P.2d_dxf.zip
English
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1-353908-4_P.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1-353908-4_P.3d_stp.zip
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Application Specification

English

Product Environmental Compliance

MD_1-353908-4_07022018239_dmtec

English

MD_1-353908-4_07022018239_dmtec

English

Instruction Sheets

Instruction Sheet for Mini CT DC Drawer Connector SF Type

Japanese

Instruction Sheet (non U.S.)

English

1.5mm Pitch Mini CT DC Drawer Connector SF Type

Japanese

Instruction Sheet (non U.S.)

Japanese

1.5mm Pitch Mini CT Hybrid Drawer Connector SF Type

Japanese

Instruction Sheet (non U.S.)

Japanese

1.5mm Pitch Mini CT Hybrid Drawer Connector Slim Type

Japanese

Instruction Sheet (non U.S.)

Japanese