

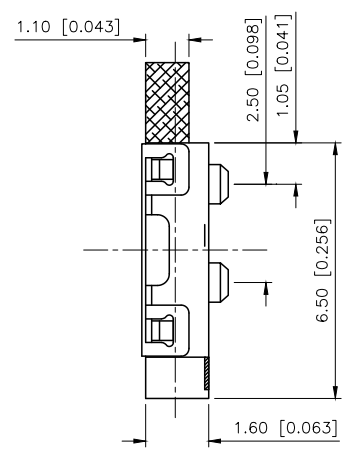




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.06	阿树

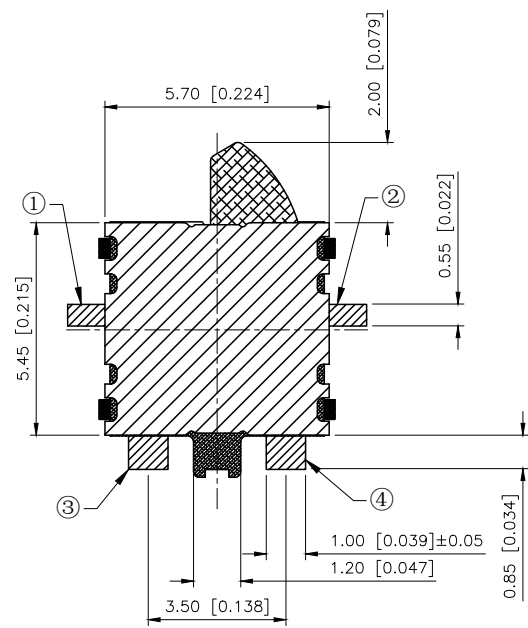


Rated range:50mA DC12V
Insulation resistance:≥100MΩmin (DC100V)
Contact resistance:≤300mΩ
Compressive strength:AC100V(50/60Hzfof1minute)
Mechanical life:50000 cycles
Operating temperature:−10℃~+60℃
Operation strength:50±30gf



CIRCUIT DIAGRAM

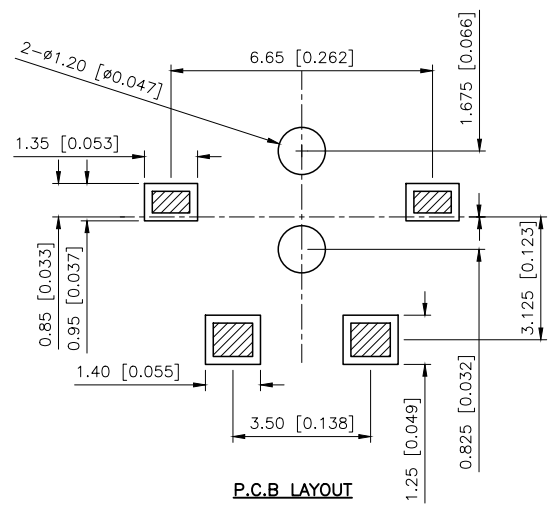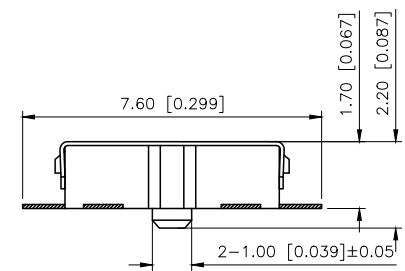

P.C.B LAYOUT

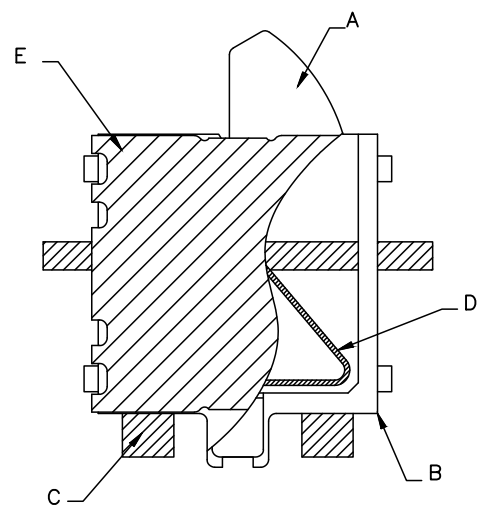

E	lid	1	SUS	silvery white
D	Shrapnel	1	Silver copper	silvery white
C	Solder patch	1	Phosphor bronze	silvery white
B	base	1	PA66	black
A	Button	1	PA66	black
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: DETECT SWITCH
CHECKED		UNIT: mm/in	PART NO.: TM-1627A
APPROVED		SIZE: A4	DWG NO.: