




Connectors > Lighting Connectors > Street Lighting Controls > Street Lighting Receptacles

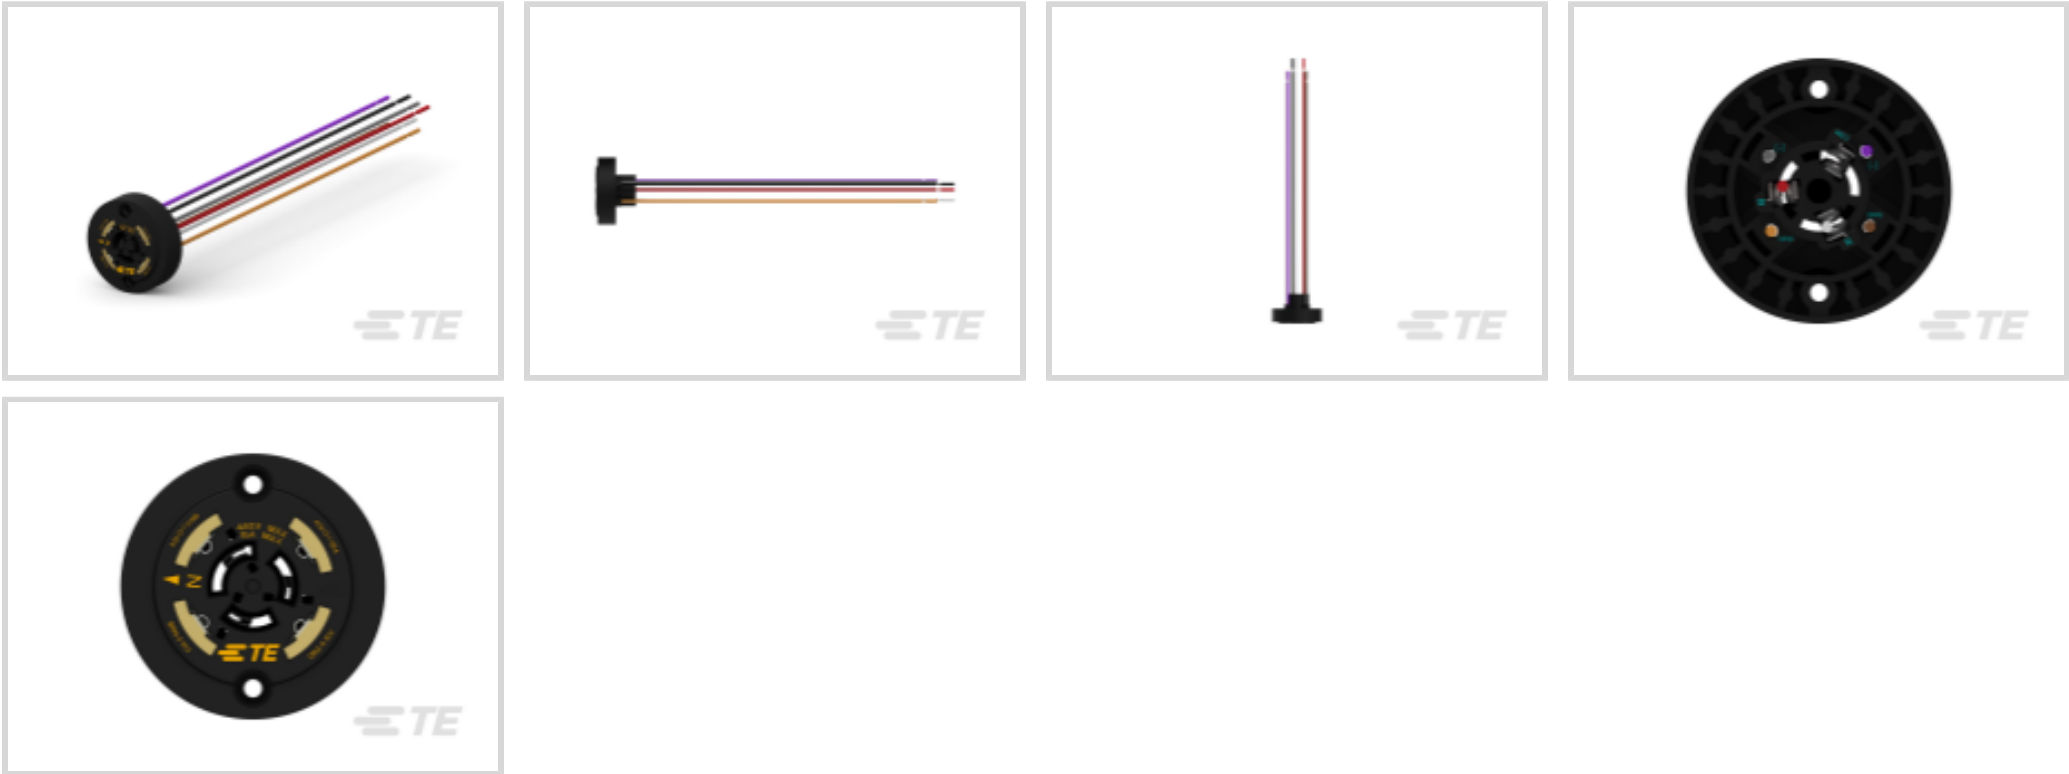

Lighting Product Type: **Connector**
Lighting Connector Features Included: **Not Rotatable**
Connector System: **Wire-to-Component**
Number of Positions: **7**
Sealable: **Yes**

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Lighting Product Type	Connector
Connector System	Wire-to-Component
Sealable	Yes

Configuration Features

Lighting Connector Features Included	Not Rotatable
Number of Positions	7

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Mating Area Plating Material	Gold
--------------------------------------	------



Contact Current Rating (Max)	15 A
------------------------------	------

Dimensions

Wire Size	18 – 14 AWG
-----------	-------------

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	ANSI
---	------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2213730-1
LIGHT CONTROLLER BASE
ASSEMBLY, 76MM DIA

TE Part # 1-2325661-1
LUMAWISE ENDURANCE N SHRTG
CAP BASE VENT

TE Part # 2325661-1
LUMAWISE ENDURANCE N SHRTNG
CAP BASE ASM

TE Part # 2336396-2
ASSEMBLY, LIGHT CONTROLLER
BASE, W/VENT

TE Part # 2336396-1
ASSEMBLY, LIGHT CONTROLLER
BASE, W/VENT

TE Part # 2213871-3
LIGHT CONTROLLER BASE ASSY,
81MM DIA, 7POS

Also in the Series

LUMAWISE Dimming Receptacle

Street Lighting Receptacles(24)

Customers Also Bought

TE Part #2213748-1
COVER, LIGHT CONTROLLER, 76MM
DIA, MEDIUM

TE Part #2834049-1
REC, 2P LATCHED POKE-IN WTW
CONN. NL

TE Part #350851-1
UMNL SOK 24-18 PTPBR

TE Part #2834048-1
PLUG, 2P LATCHED POKE-IN WTW
CONN. NL

TE Part #2325807-3
LUMAWISE Z45 LED HOLDER 19X19

TE Part #1-2213858-1
RECEPTACLE ASSEM, LUMAWISE
ENDURANCE S

TE Part #2213899-3
Rcpt Assy, Dimmable Photocontrol,
105C, 3/2

TE Part #2328118-1
LUMAWISE ENDURANCE N
SHORTING CAP



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2213899-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2213899-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2213899-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

LUMAWISE DIMMING RECEPTACLE IEC 61984 - Double Insulation

LUMAWISE DIMMING RECEPTACLE IEC 61984 - Double Insulation

English

Product Specifications

Application Specification

English

Agency Approvals

Dimmable Photocontrol CB Test Report

English