



Relays & Contactors > Relays > Automotive Relays > Automotive Plug-In Relays > Maxi Relays



Coil Voltage Rating: **24 VDC**

Contact Current Class: **>50 A**

Coil Special Features: **Rp 1200Ω**

Product Mount Type: **Socket**

Coil Magnetic System: **Monostable**

Features

Configuration Features

Contact Arrangement	1 Form A (NO)
Coil Special Features	Rp 1200Ω

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	500 Vrms
Contact Limiting Making Current	240 A
Contact Limiting Short-Time Current	300 A
Contact Limiting Continuous Current	70 A
Insulation Initial Dielectric Between Contacts & Coil	500 Vrms
Contact Current Rating	40 A
Contact Limiting Breaking Current	40 A
Coil Power Rating DC	2.1 W
Contact Voltage Rating	24 VDC
Contact Switching Load (Min)	1000mA @ 5VDC
Coil Voltage Rating	24 VDC
Coil Resistance	268 Ω

Body Features

Product Weight	38 g[1.3 oz]
----------------	--------------

Contact Features

Contact Material	Silver Alloy
------------------	--------------



Termination Features

Relay Connection Type	Plug-In
Terminal Configuration	Quick Connect Terminals

Mechanical Attachment

Product Mount Type	Socket
--------------------	--------

Dimensions

Product Width	25.9 mm[1.031 in]
Product Length	25.9 mm[1.031 in]
Product Height	24.9 mm[.98 in]

Usage Conditions

Environmental Category of Protection	RTI
Environmental Ambient Temperature (Max)	125 °C[257 °F]

Operation/Application

Current Type	DC
Coil Magnetic System	Monostable

Other

Length Class (Mechanical)	25 – 30 mm
Insulation Initial Dielectric Between Coil & Contact Class	0 – 500 V
Environmental Ambient Temperature Class	105 – 125 °C
Height Class (Mechanical)	25 – 30 mm
Coil Power Rating Class	1.5 W
Width Class (Mechanical)	25 – 30 mm
Contact Current Class	>50 A

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2141026-1
RELAY BOX ASSY,HARD WIRED

Also in the Series | Power Relay F




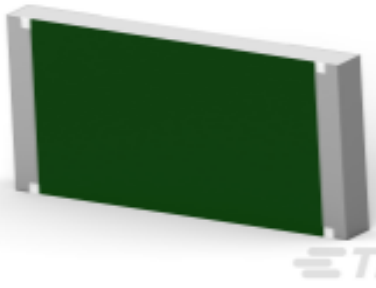




Maxi Relays(12)



Mini Relays(43)

Customers Also Bought

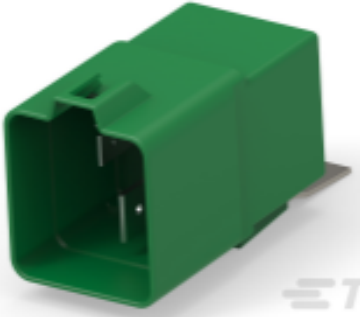

 <p>TE Part #2-1564412-1 18POS, TAB 1.6X0.6, TAB HSG, ASSY</p>	 <p>TE Part #321165 TERMINAL, SOLIS R 16-14HD 1/2</p>	 <p>TE Part #5-2176403-8 3550 240R 1%</p>	 <p>TE Part #1579008-5 EXTRACTION TOOL</p>
 <p>TE Part #3-1904117-4 V23134J0165X537-EV-CBOX</p>	 <p>TE Part #1-1393315-1 V23132B2002B200=HCR</p>	 <p>TE Part #1-1414168-0 V23134A0056X433-EV-CBOX</p>	 <p>TE Part #2405341-1 BLIND PLUG BLOCK ASSAMBLY, FINGER UNLOCK.</p>
 <p>TE Part #6-1414995-8 V23134Z1032-EV-CBOX</p>	 <p>TE Part #7-1393304-1 V23134M1052C642-EV-CBOX</p>		

Documents

Product Drawings

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1393304-5_O.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1393304-5_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1393304-5_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Automotive Relay Application Notes

English



MFINITY Modular Hard Wired Fuse and Relay Box

English

Product Specifications

Definitions General Purpose Relays

English