



製品レイアウト
PRODUCT LAYOUT

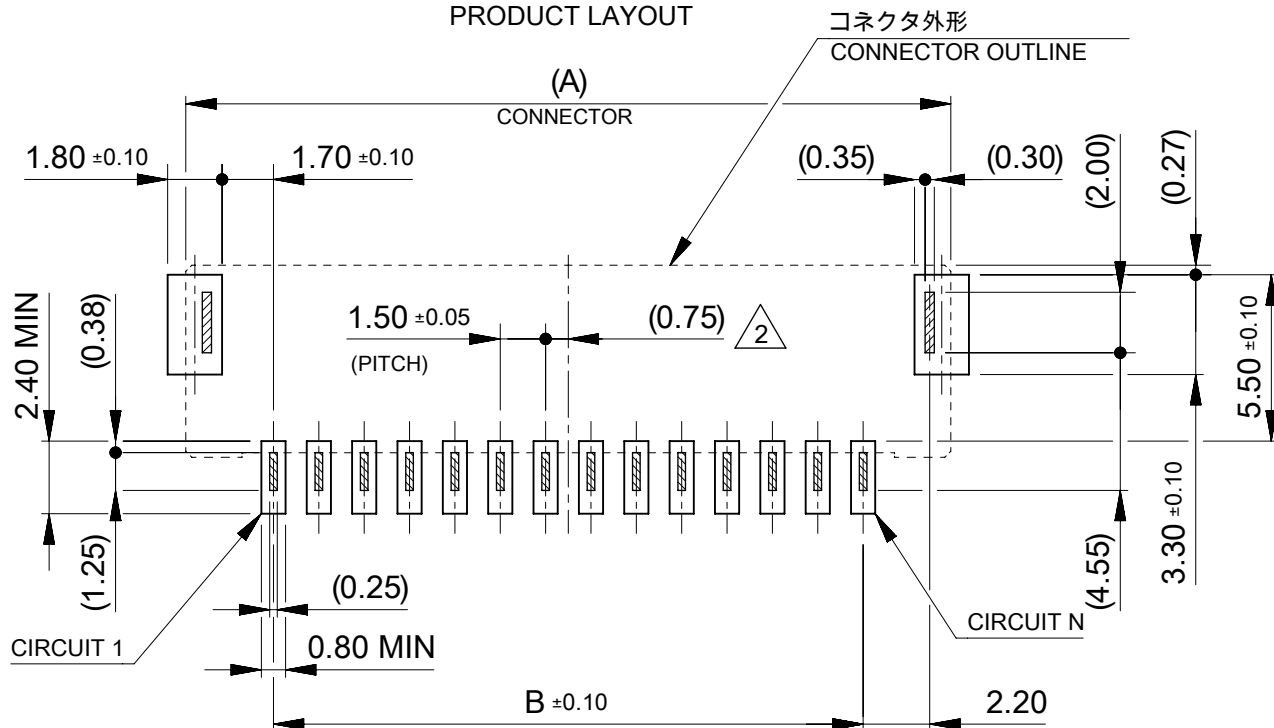



基板レイアウト(参考)

PCB PATTERN LAYOUT (REFERENCE)
(参考: メタルマスク厚さ 0.10mm, マスク開口率100%)
(REFERENCE: METAL MASK THICKNESS 0.10mm, APERTURE RATIO 100%)

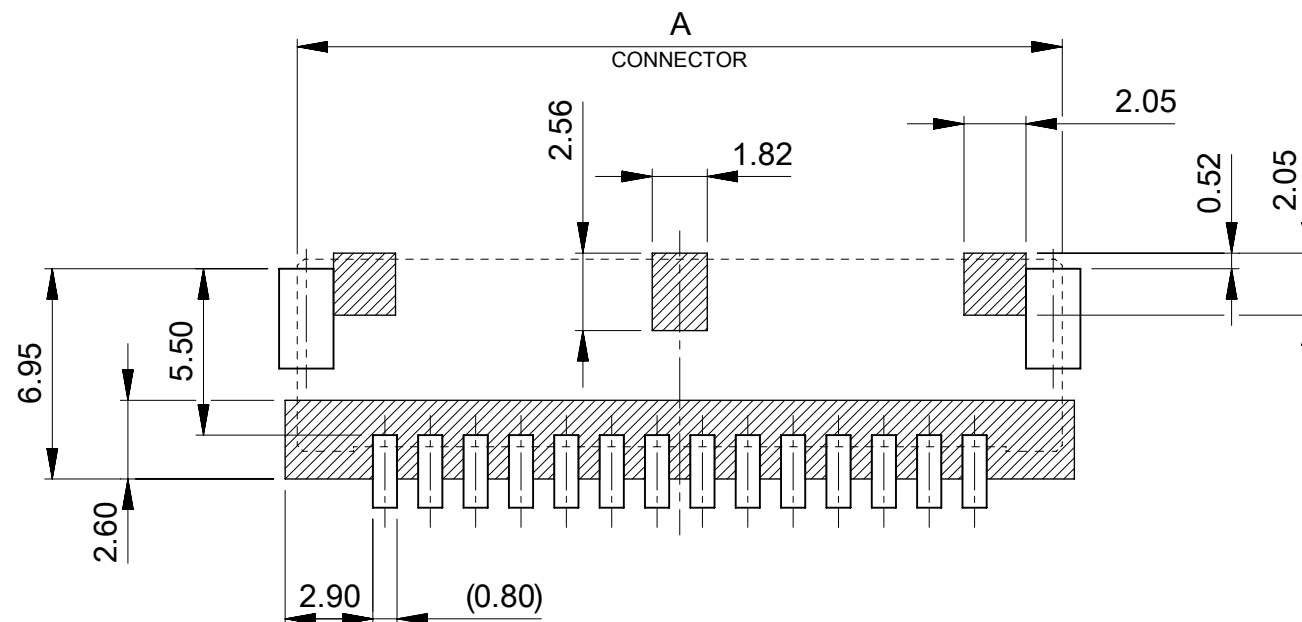


パターン非推奨エリア

パターンを引き回す際は、製品機能に影響がないことをご確認ください。
PATTERN IS NOT RECCOMENDED ON THE HATCHED AREA.
PLEASE CHECK NOT TO HAVE PROBLEM FOR PRODUCT FUNCTION
WHEN SETTING PATTERN ON THE HATCHED AREA.



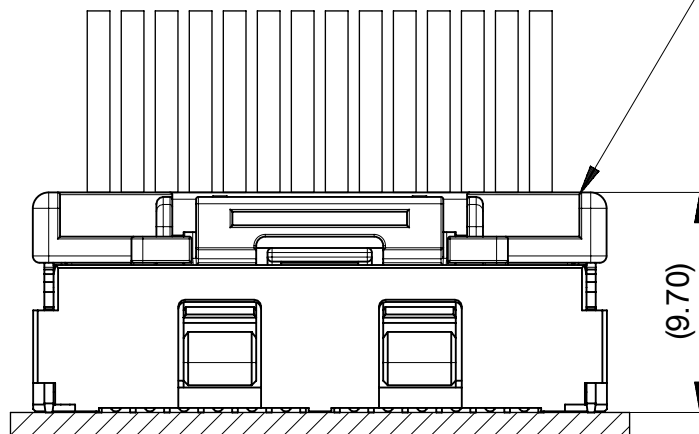
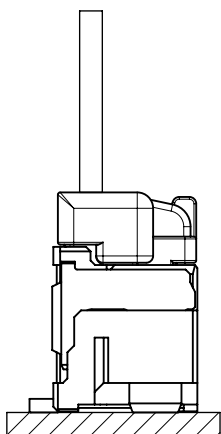


MATED CONNECTORS

嵌合相手: 502578 シリーズ
MATE WITH: 502578 SERIES

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex										
mm		NTS															
GENERAL TOLERANCES (UNLESS SPECIFIED)				CLIK-MATE 1.5 SINGLE ROW SMT VT TYPE REC ASSY GOLD PLATING													
ANGULAR TOL ± 3.0 °																	
4 PLACES		± 0.2															
3 PLACES		± 0.2															
2 PLACES		± 0.2															
1 PLACE		± 0.2		PRODUCT CUSTOMER DRAWING													
0 PLACES		± 0.2															
EC NO: 742719				DOCUMENT NUMBER						DOC TYPE		DOC PART		REVISION			
DRWN: MIKEDA01										2023/06/23							
CHK'D: SAKIYAMA				2023/06/23		2132250000-SD						PSD		000		F	
APPR: AIDA				2023/06/23													
INITIAL REVISION:				MATERIAL NUMBER						CUSTOMER						SHEET NUMBER	
DRWN: MIKEDA01																	
APPR: KOMURAKAMI				2019/11/20													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		GENERAL						2 OF 6	
				A3-SIZE		213225											



ロック形状および吸着エリア
LOCK SHAPE AND VACCUME AREA

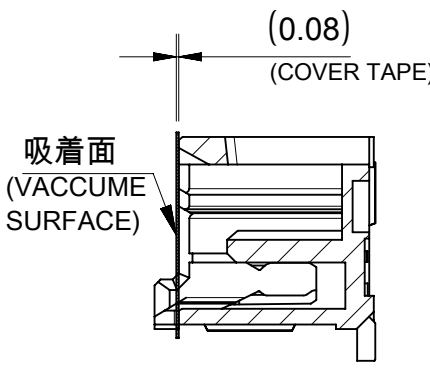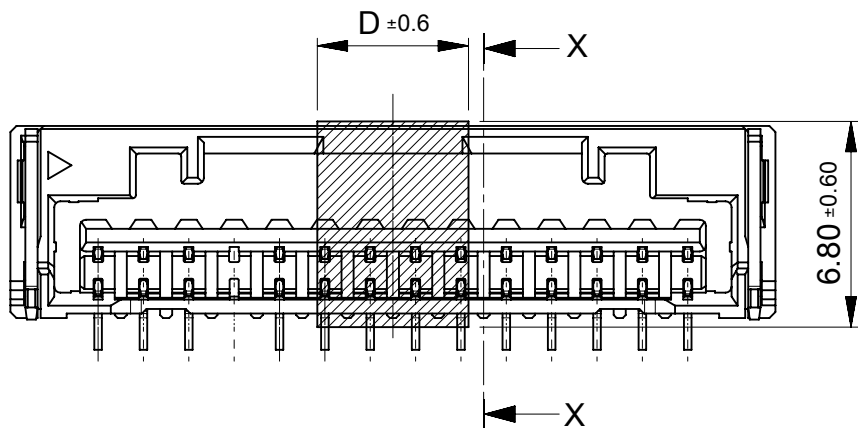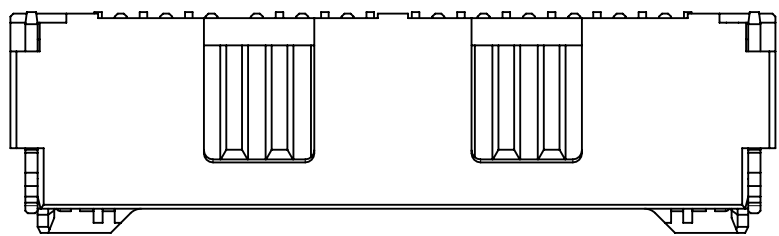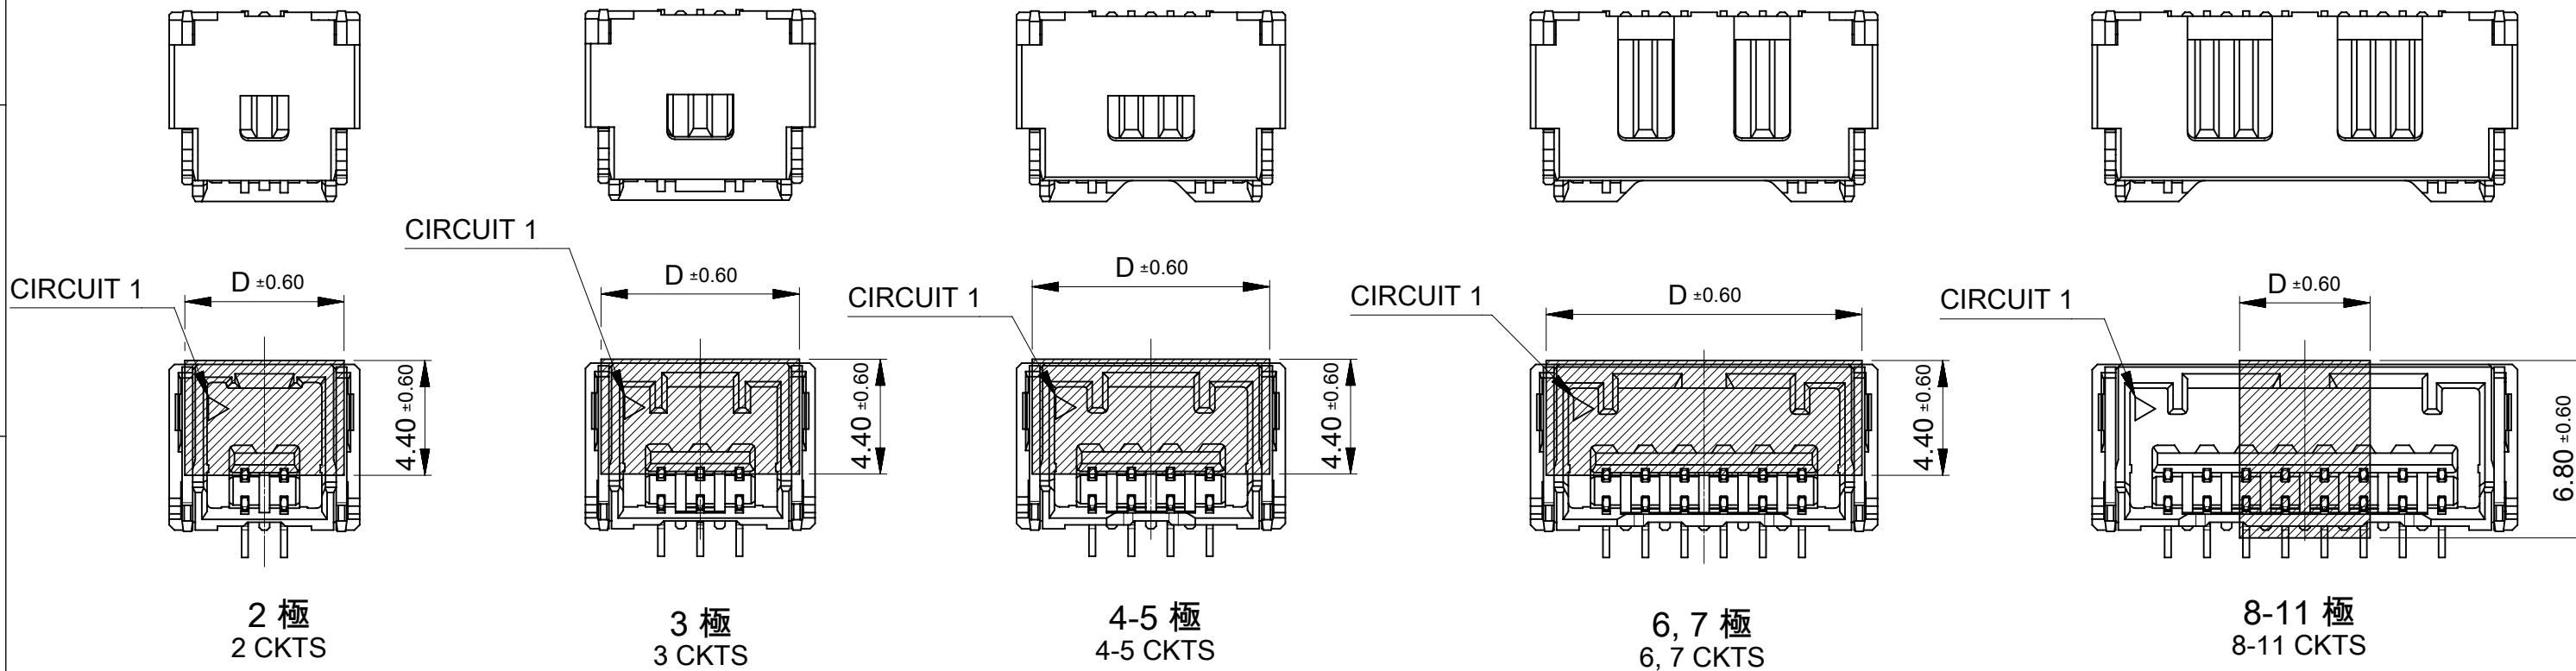

SECTION X-X


5.0	15
	14
	13
	12
	11
	10
	9
	8
13.6	7
12.1	6
10.6	5
9.1	4
7.6	3
6.1	2
D	極数 CKT NO

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		molex			
CURRENT REV DESC:					
EC NO: 742719		2023/06/23		SINGLE ROW SMT VT TYPE REC ASSY GOLD PLATING	
DRWN: MIKEDA01		2023/06/23			
CHK'D: SAKIYAMA		2023/06/23		PRODUCT CUSTOMER DRAWING	
APPR: AIDA		2023/06/23			
INITIAL REVISION:		2019/11/07		DOCUMENT NUMBER	
DRWN: MIKEDA01		2019/11/20		2132250000-SD	
APPR: KOMURAKAMI		2019/11/20		DOC TYPE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		PSD	
		DRAWING		DOC PART	
		A3-SIZE		000	
		SERIES		REVISION	
		213225		F	
		MATERIAL NUMBER		SHEET NUMBER	
		CUSTOMER		3 OF 6	
		GENERAL			

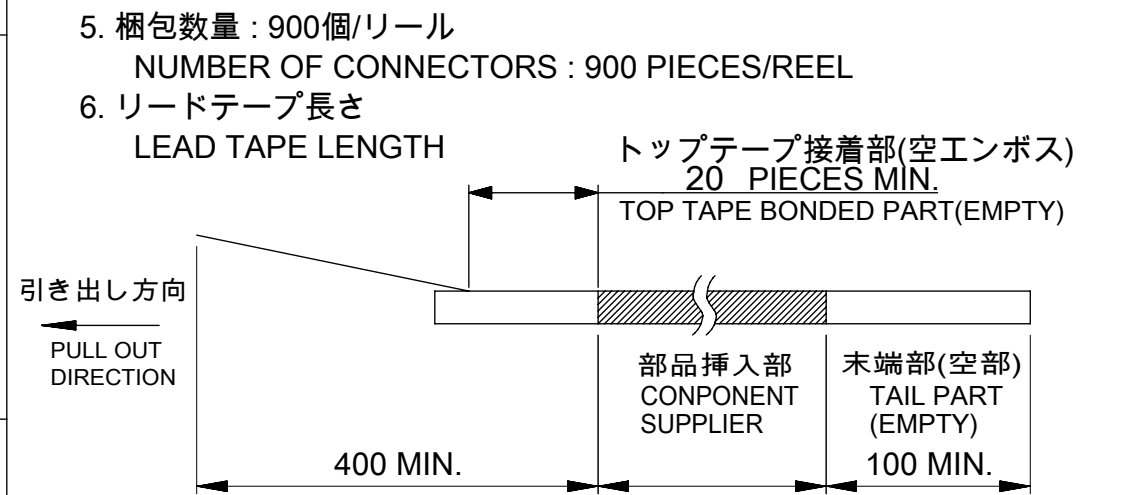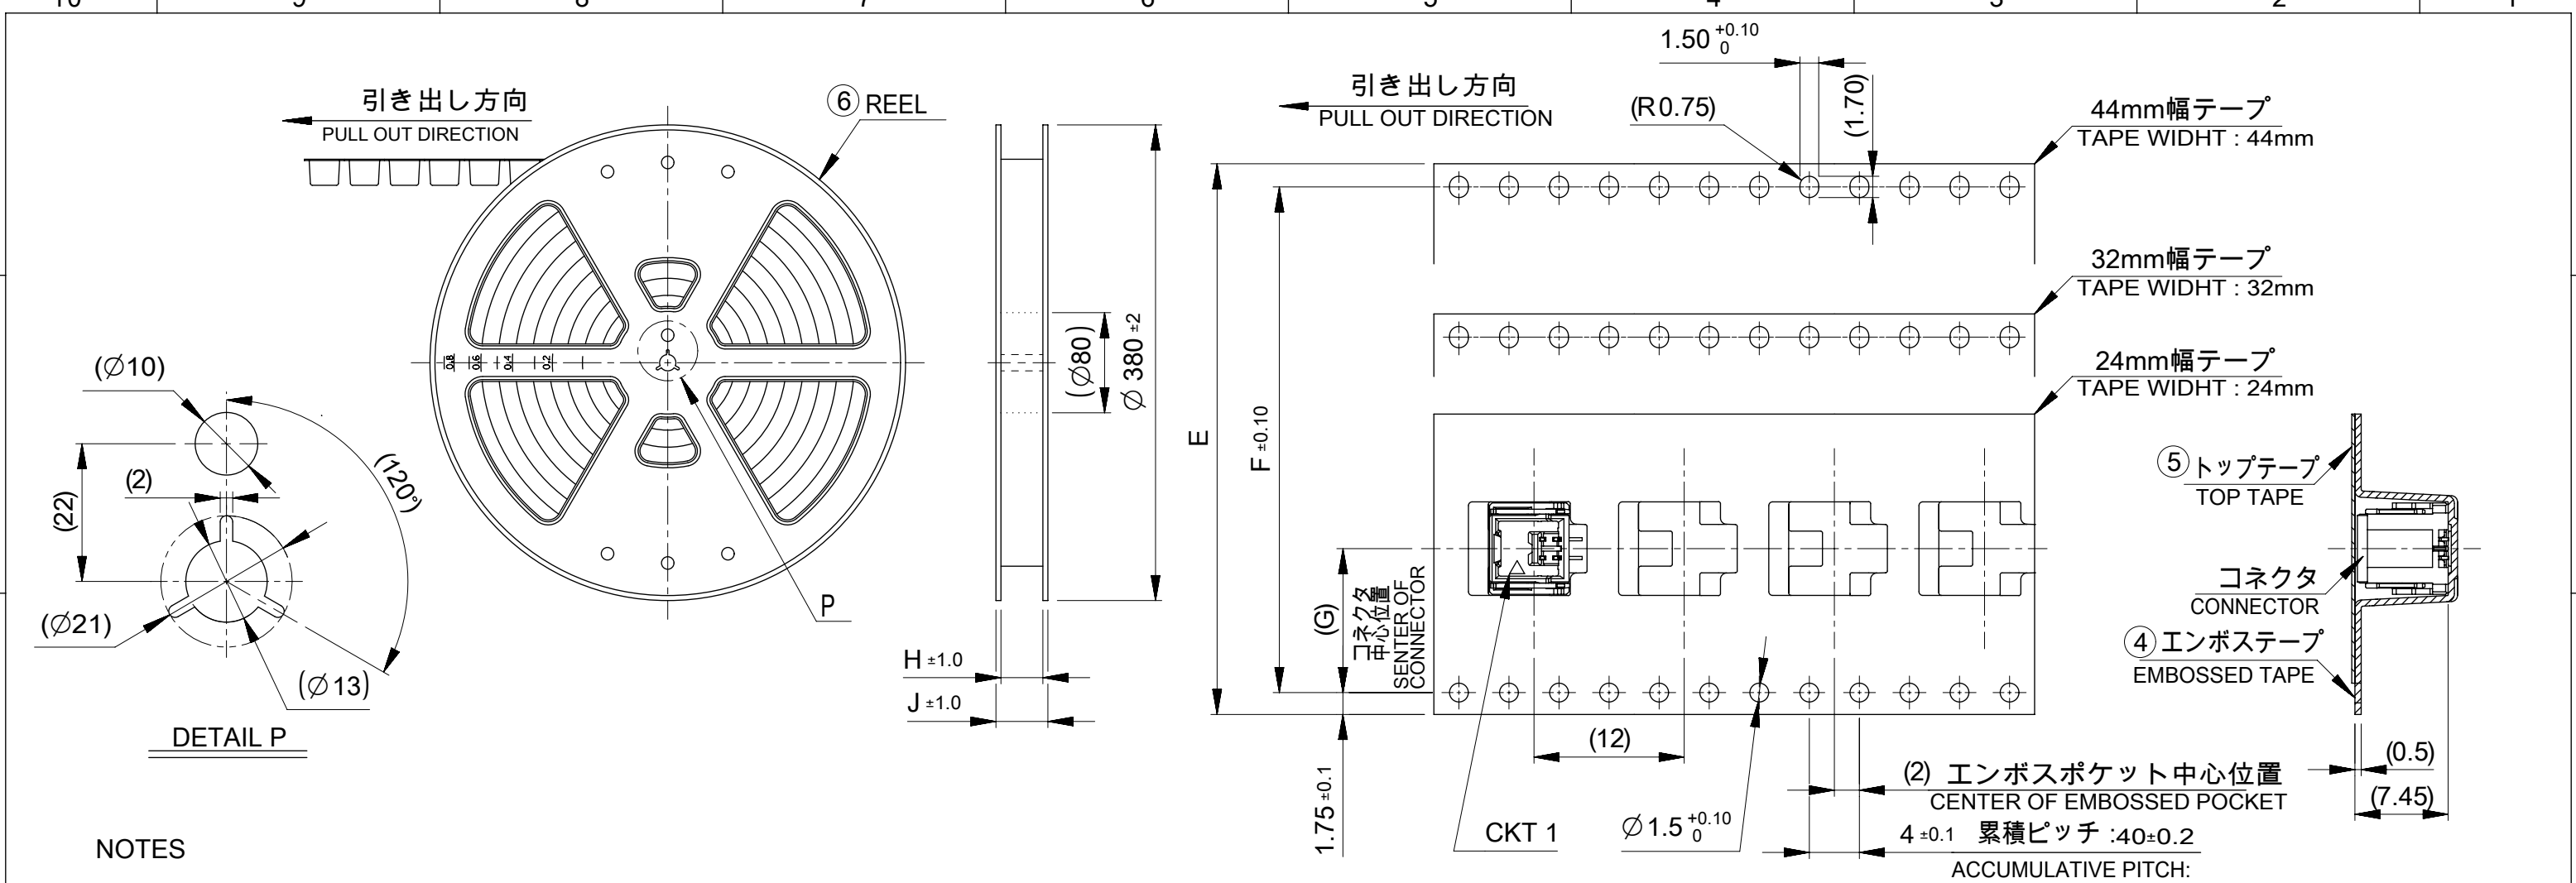

- NOTES
- 5. 梱包数量 : 900個/リール
NUMBER OF CONNECTORS : 900 PIECES/REEL
 - 6. リードテープ長さ
LEAD TAPE LENGTH
 - 7. トップテープの剥離強度はJIS C0806-3に準拠。
TOP TAPE PEELING FORCE IS DEFINED BY JIS C0806-3.
 - 8. 本製品は乾燥剤入り、ハイバリア梱包である。
THIS PRODUCT IS DELIVERD IN HIGH BARRIER PACKAGE WITH DESICCANT.

番号 NO.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYRENE(PS)
⑤	トップテープ TOP TAPE	ポリエチレン、ポリエチレンテレフタレート POLYETHLENE(PE), POLYETHYLENE TEREPTHALATE(PET)
⑥	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>
DOCUMENT STATUS P1 RELEASE DATE 2023/06/23 10:36:34		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex CLIK-MATE 1.5 SINGLE ROW SMT VT TYPE REC ASSY GOLD PLATING		
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL		± 3.0 °		EC NO: 742719 DRWN: MIKEDA01 2023/06/23 CHK'D: SAKIYAMA 2023/06/23 APPR: AIDA 2023/06/23 INITIAL REVISION: DRWN: MIKEDA01 2019/11/07 APPR: KOMURAKAMI 2019/11/20			PRODUCT CUSTOMER DRAWING		
4 PLACES		± 0.2							
3 PLACES		± 0.2							
2 PLACES		± 0.2							
1 PLACE		± 0.2							
0 PLACES		± 0.2		DOCUMENT NUMBER 2132250000-SD			DOC TYPE	DOC PART	REVISION
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							MATERIAL NUMBER	CUSTOMER GENERAL	
THIRD ANGLE PROJECTION 				DRAWING A3-SIZE	SERIES 213225				

