


45 4580 03 MP T0,8

High-current contact elements



High-current contact bush with positioning pegs, in surface mount technology (SMT), mateable from top or bottom direction, for tab contacts 0.8–1.5 mm, for printed circuit boards or lead frames

45 4580 03 MP T0,8

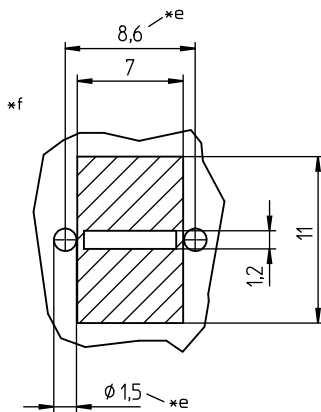

- *a supporting surface for soldering – dimensions per solder pad
min. 7.0 mm x 2.5 mm
- *b height contact point
- *c positioning peg
- *d mateable from top or bottom direction
- *e bore holes for positioning pegs
- *f circuit board layout (example)
- *g marking A for type 4580 03 MP T0,8

45

4580 03 MP T0,8

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
4580 03 MP T0,8 V12VP12	1	350	2100

Packaging:

on reel