



UL 94V0 RATED NI/CU NYLON RIPSTOP (NRS) FABRIC-OVER-FOAM

Laird Technologies' Fabric-over-Foam (FoF) 51K EMI gaskets provide excellent EMI shielding performance for customers where EMI issues occur. The 51K Series EMI gaskets are composed of electrically conductive fabric wrapped around a soft urethane foam core. They are supplied with either a conductive or non-conductive pressure sensitive adhesive (PSA), and can be equipped with an Extended Release Liner (ERL) on the adhesive. The 51K is a UL 94V0 rated product that can be created with cross-section profiles such as rectangle, D, C, P, T, knife, bell shapes, and others. The 51K EMI gaskets can be further customized to an application by die-cutting, hole punching, notching, etc.


FEATURES

- Fabric-over-Foam gaskets are RoHS compliant
- UL 94V0
- Low surface resistivity of $< 0.07 \Omega/\square$ provides excellent conductivity
- Shielding effectiveness of >100 dB across a wide spectrum of frequencies
- Extremely low compression forces allow for use of lighter materials
- Fabric is highly conductive to provide good EMI shielding and grounding
- Abrasion resistant metallized fabrics show virtually no degradation in electrical performance after 1,000,000 cycles
- Laird Technologies' proprietary coating prevents fabric fraying and fingerprinting
- Available with conductive or non-conductive PSA
- Many cross-section profiles available such as rectangle, D, C, P, T, knife, bell and more
- Profile gaskets can be cut to specified lengths, kiss-cut on release liner, or mitered to form frame configurations


MARKETS

- Cabinet applications
- LCD and Plasma TV
- Medical equipment
- Servers
- Printers
- Laptop computers
- Networking equipment
- Desktop computers
- Telecommunications cabinets

FORCE/DISPLACEMENT/RESISTANCE (FDR)

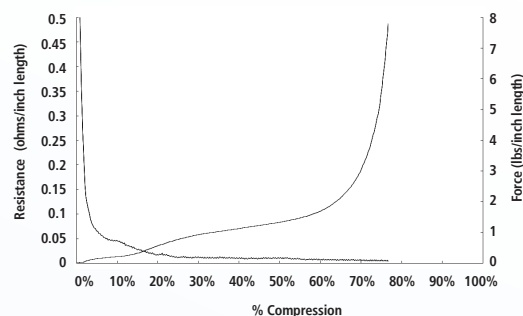

SHIELDING EFFECTIVENESS (dB)

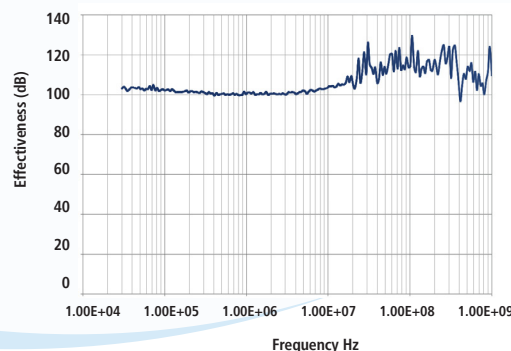

global solutions: local support™

USA: +1.866.928.8181


Europe: +49.0.8031.2460.0

Asia: +86.755.2714.1166

Item	Unit	Value	Test Method
Shielding Effectiveness			SAE-ARP-1705(Mod.)*
at 100 MHz		109	
at 1 GHz	dB	113	
Surface Resistivity	$\Omega/\square$	< 0.07	ASTM F390
Compression Set	%	< 20	ASTM D3574
Operation Temperature	°C	-40 to 70	-
Flame Retardant	UL 94V0 (UL file No.E170327)		
Hazardous Substance	Compliant with RoHS (Directive 2002/95/EC)		
	Compliant with SONY SS-00259		
	Antimony-free		
Shelf Life	12 months at 23°C/ 60% R.H.		

* Part tested: 8 mm H x 10 mm W, rectangle shape

COMPOSITION OF PRODUCT

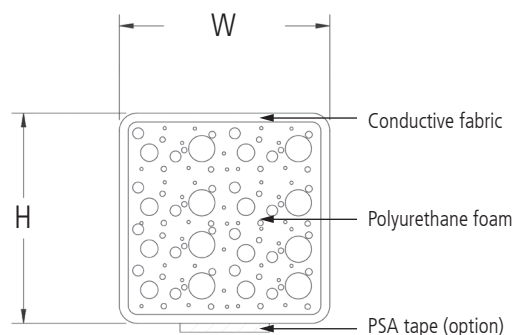

PRESSURE SENSITIVE ADHESIVE (PSA TAPE) OPTIONS

Name	Type	Thickness (mm)	Peel strength on stainless steel (JIS Z 0237)	Z-axis Resistance
LT-301	Conductive PSA	0.09	> 1.3 kgf/25 mm	< 0.05 Ω
LT-350	PSA	0.12	> 2 kgf/25 mm	-

*Other PSA can be provided. Contact Laird Technologies engineering.

ORDERING INFORMATION

PART NUMBER EXAMPLE

Digits: 1 2 3 4 5 6 7 8 9 10 11 12 13 14

4	2	1	6	A	A	-	5	1	K	-	0	1	4	0	0
Profile Shape & Details						Product Name				Part Length (inches to two decimal points)					

EMI-DS-FOF-51K 0712

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of this information must be assumed by the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of Laird Technologies' materials or products for any specific or general uses. Laird Technologies shall not be liable for damages or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2012 Laird Technologies, Inc. All Rights Reserved. Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or its affiliates company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Laird Performance Materials:

4742AB51K01800	4245-AB-51K-00670	4245-AB-51K-00570	4379EK51K00600	4224AB51K08400	4315AB51K-48.00
4249AB51K09600	4212-AB-51K-02400	4263AB51K00800	4795AB51K07200	4701AB51K-00430	
4212AB51K02400	4051AB51K09600	4208AB51K09600	4056AB51K09600	4164EE51K00132	4211AB51K08400
4375AC51K00740	4694AB51K00113	4E06AD51K09600	4182AB51K00549	4182AB51K01067	4223AB51K01800
4833AC51K06225	4833AC51K02850	4040HA51K09600	4212AB51K00213	4203AB51K00100	4609AB51K04800
4211AB51K00575	4201AB51K00387	4633AF51K00375	4182AB51K07900	4356AB51K00950	4418AB51K08400
4046AB51K02441	4184AC51K00400	4502AB51K03600	4181AB51K02400	4798AB51K09600	4245AB51K09600
4D17EA51K00214	4205AF51K03600	4602AB51K04800	4097AB51K00725	4E06AC51K01177	4202AB51K09600
4633AB51K01800	4202AB51K03600	4173AB51K00260	4633AF51K01250	4609AB51K00500	4633AF51K00100
4701AA51K01200	4630AB51K01000	4242AB51K00075	4219AE51K01800	4210AB51K01200	4259EE51K00220
4082AB51K09600	4245AB51K00650	4176AB51K08785	4E06AC51K00068	4797AB51K06300	4055AB51K00360
4049AB51K01200	4522AB51K00944	4094AB51K03600	4209AC51K09600	4741AB51K00242	4797AB51K09600
4358AB51K01500	4173AB51K01800	4584AB51K01200	4789AB51K00035	4B40HC51K00866	4194AB51K04800
4912AB51K00250	4283AB51K09600	4252AD51K09600	4048AC51K01606	4220AB51K00615	4056AB51K04800
4219AB51K09600	4741AB51K01200	4358AB51K03600	4219AE51K00610	4688AB51K09600	4094AB51K01681
4094AB51K09600	4211AB51K01650	4692AB51K01475	4789AB51K09600	4740AB51K02400	4220AB51K02800
4522AE51K01800	4701AB51K01258	4046AA51K01800	4387AB51K01420	4522AB51K00984	