


G2E133 Series

Centrifugal Blower

Ø 133mm



■ AC single inlet, forward curved centrifugal blower. Via a bracket, the integrated external-rotor motor is mounted on one side of the housing.

■ Housing and impeller of galvanised sheet-steel. Forward curved impellers are directly press-fitted onto the rotor of the external-rotor motor.

■ Direction of rotation is CW as seen from suction side. Insulation class "B".

■ Maintenance-free ball bearings.

■ UL, CSA, VDE approvals on some models, please contact application engineering.

Part
Number

Curve

CFM
@ 0

VAC

Hertz

Power
(W)

dBA

Max Amb.
Temp C

Bearing
Type

Features

Capacitor
(µF)

Wgt.
(lbs)

G2E133-DN77-01

1

138.3

230

60*

110

65

50



Ball

Leads

2

4.19

* 50 Hz data available

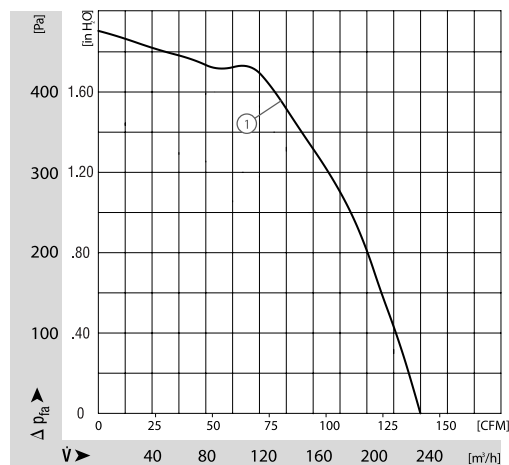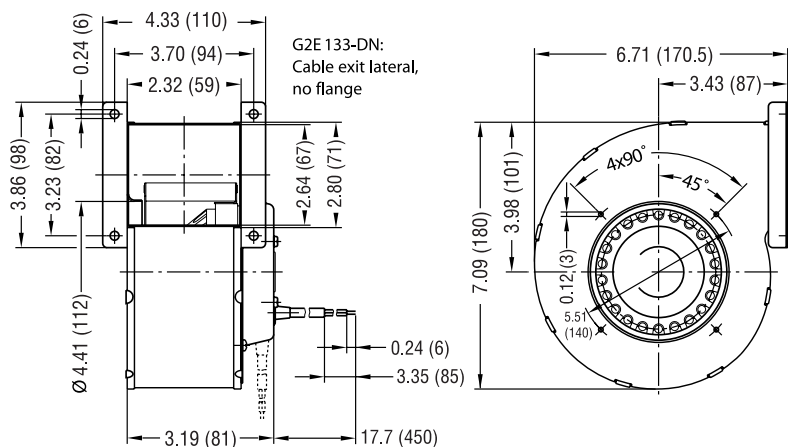

ebmpapst

e-mail: sales@us.ebmpapst.com · TEL: 860-674-1515 · FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2006 © ebm-papst Inc. reserves the right to change any specifications or data without notice