


公母对插后尺寸



备注:

1. 材质及电镀: 见附表1

2. 电气性能:

2.1 接触电阻: 30mΩ Max FOR INITIAL.
40mΩ Max AFTER TEST.

2.2 耐电压: 100V AC

2.3 绝缘: 100MΩ Min

2.4 额定电流:

COLLECTIVELY VBUS PIN (A4,A9,B4,B9) ,TOTAL 5A

VCCON PIN (B5) THROUGH GND PIN(A1,A12,B1,B12),1.25A

OTHERS PIN, 0.25A




2.5 工作温度: -40°C ~ 80°C.

3. 机械性能:



3.1 插入力: 5~20N.

3.2 拔出力: 初始值8~20N测试后6~20N

3.3 寿命: 10,000 CYCLES

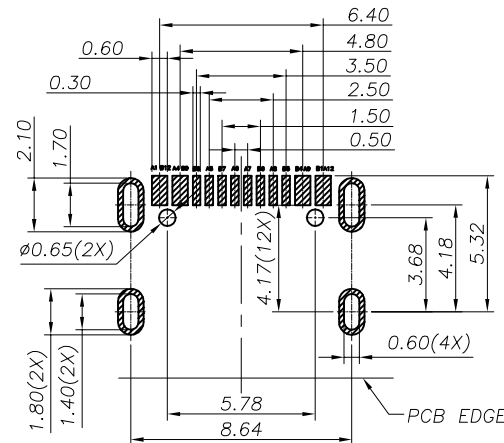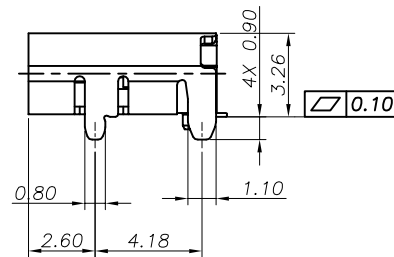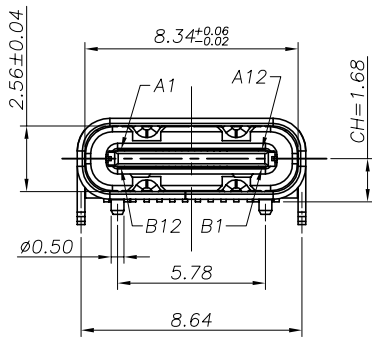RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)	单位 (UNIT): MM
品名 (ITEM NO)		版本 (REV)	比例 (SCALE) 1:1
料号 (PART NO)		日期 (DATE)	未注公差 TOLERANCE UNSPECIFIED
模号 (MODEL NO)		设计 (DESIGN)	X.X ±0.30
		审核 (CHECKED)	X.XX ±0.20
		核准 (APPROVED)	X.XXX ±0.10
			X" ±5°
			X.X" ±2°