

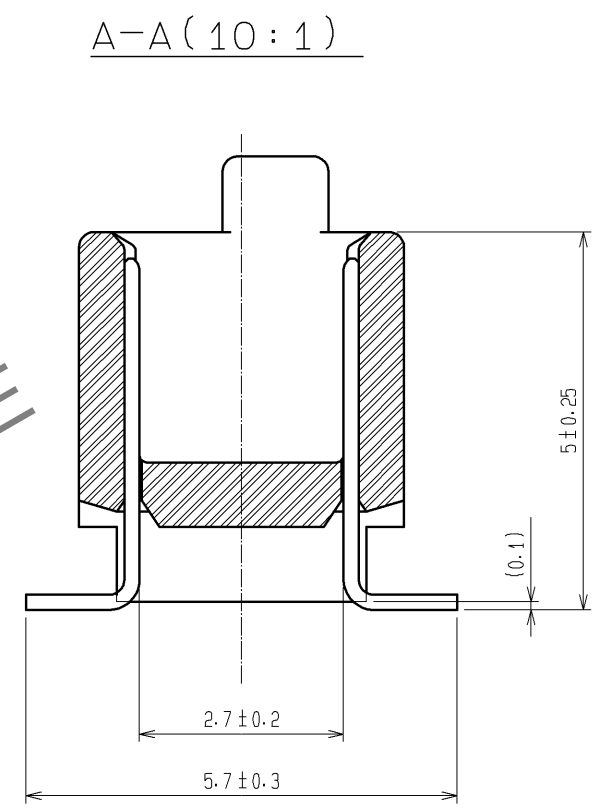
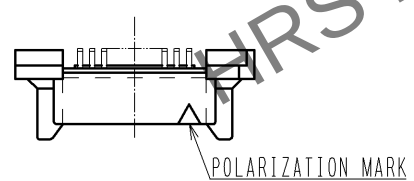


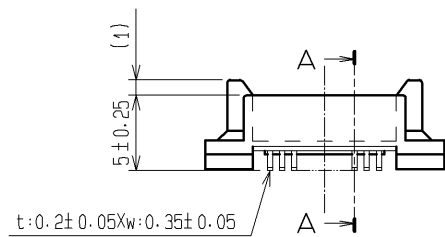


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

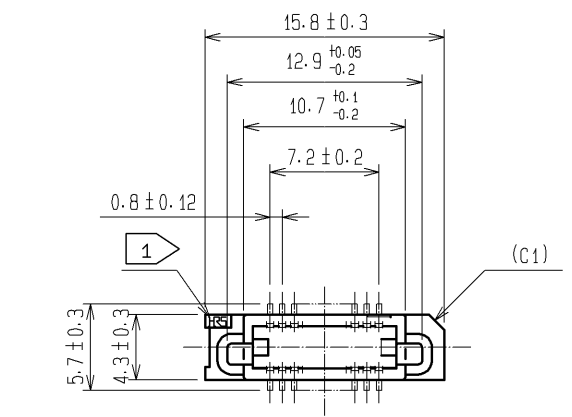

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS $t=0.15$)

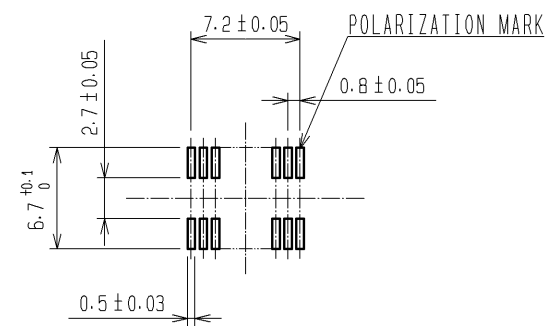

- NOTES
1. HRS MARK SHOULD BE OPTIONAL.
 2. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1 μ m min. LEAD AREA: TIN-PLATING 1 μ m min. UNDER PLATING: NICKEL 1 μ m min.
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED
		APPROVED : HS. OKAWA	08. 06. 26	DRAWING NO. EDC3-071315-25		
HIROSE ELECTRIC CO., LTD.		CHECED : HT. YAMAGUCHI	08. 06. 25	PART NO. FX6A-20P-0.8SV1(C71)		
		DESIGNED : SY. KAMIGA	08. 06. 23	CODE NO. CL576-0221-0-71		
		DRAWN : TP. MATSUMOTO	08. 06. 18	1/1		