


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		新增卡扣R角, 增强卡扣强度	2024.03.14	桑葚
A1	N/A		更换图框	2024.11.29	阿树

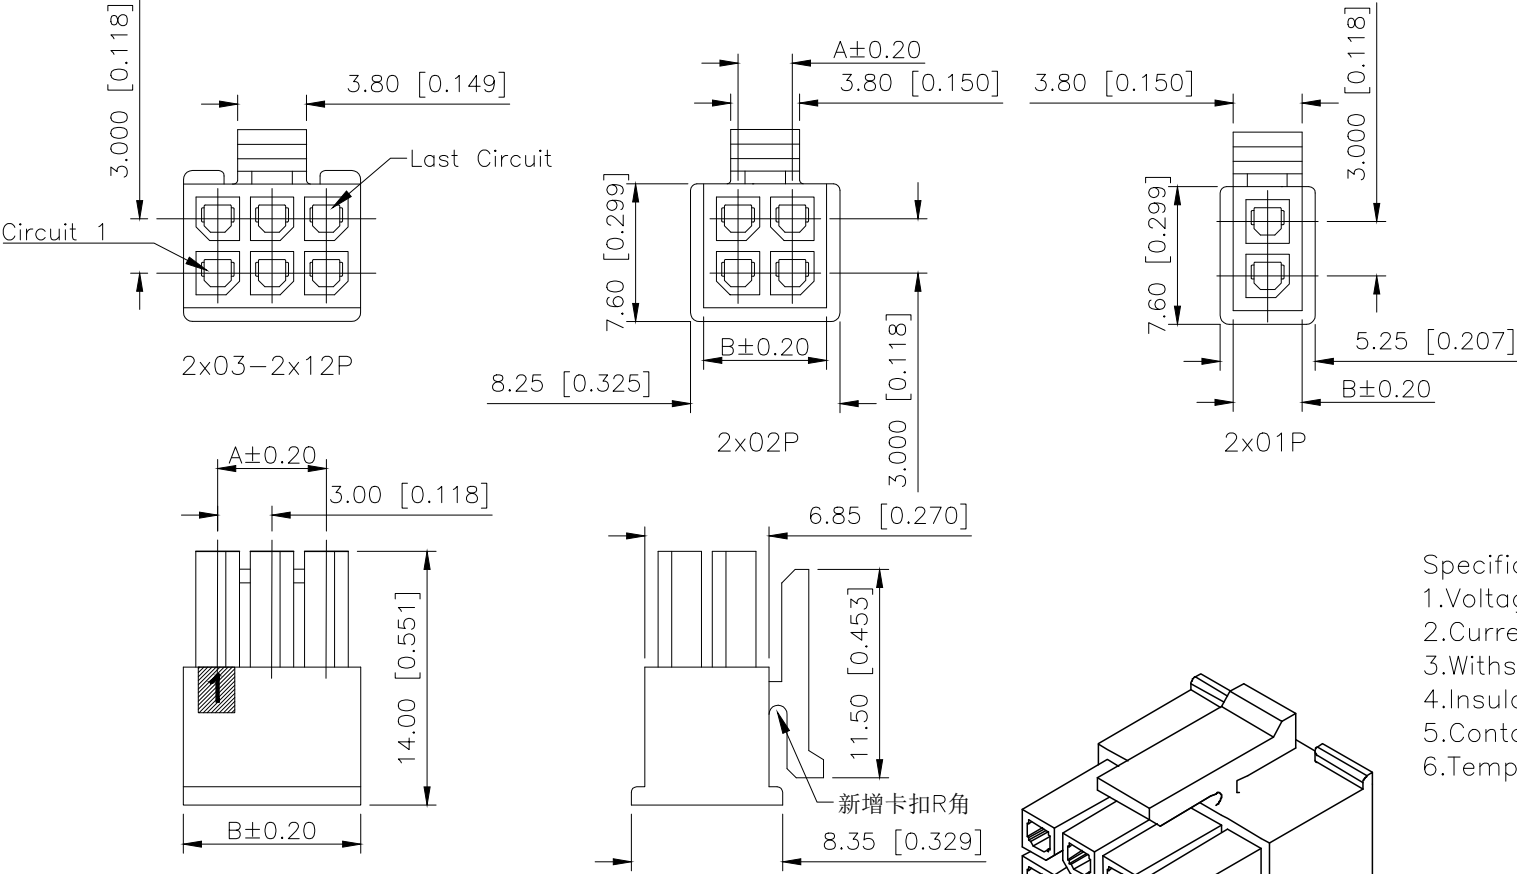

2x01P		2x12P
2x02P		2x11P
2x03P		2x10P
2x04P		2x09P
2x05P		2x08P
2x06P		2x07P

Specifications(规格):

- Voltage rating(额定电压):250V AC DC
- Current rating(额定电流):5.0A AC/DC
- Withstanding voltage(耐压值): $\geq 1500V$ AC/minute
- Insulation resistance(绝缘电阻):1000M Ω Min
- Contact resistance(绝缘电阻):20m Ω Max
- Temperature range(使用温度):-40 $^{\circ}C \sim +125^{\circ}C$

PART NO.:

C3030 H M-2xXX N2

① Series No
② Category:H-Housing
③ Welding Board Angle:M-Male Housing
④ Row No-Pin: 2x01-2x12P
⑤ Material:N2-PA66,UL 94V-2,BLACK

POLES	DIM.A	DIM.B
2x02	3.00	6.85
2x03	6.00	9.85
2x04	9.00	12.85
2x05	12.00	15.85
2x06	15.00	18.85
2x07	18.00	21.85
2x08	21.00	24.85
2x09	24.00	27.85
2x10	27.00	30.85
2x11	30.00	33.85
2x12	33.00	36.85

AuGLAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	C3030HM-2xXX-N2
APPROVED		SIZE:	A4	DWG NO.:	