


1	2	3	4
Empfohlener Ausschnitt fuer Rastbefestigung (Graf gegenueber Bestueckungsseite) recommended cut-out for snap-in fixing ledge opposite to snap-in direction)	Wanddicke wall thickness 0.75 bis/to 1.25 1.25 bis/to 2 2 bis/to 3	Ausschnittlaenge length of cut-out 26.2 _{-0.1} 26.4 _{-0.1} 26.8 _{-0.1}	Ausschnittbreite width of cut-out 12.4 ^{+0.1} 12.4 ^{+0.1} 12.4 ^{+0.1}



Aufschrift
Marking

● 155..
16(4)/250 ~ T100/55 T100
10(4)/250 ~ 5E4
5/100A 250V ~

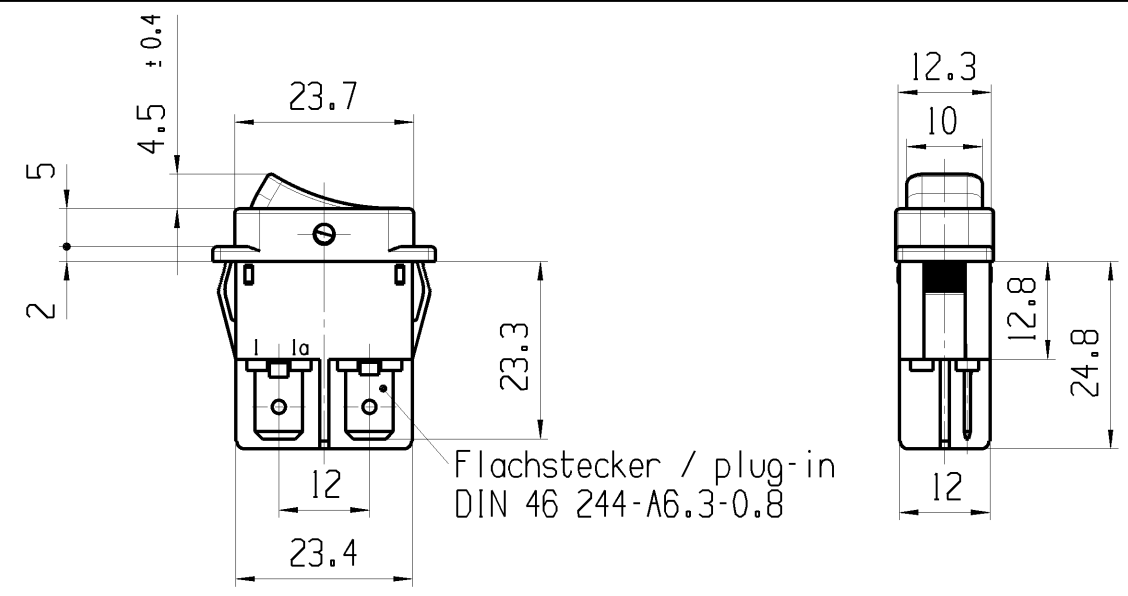

16A 125-250V AC
1 HP 125V AC
2 HP 250V AC
R38

Herstellort/-jahr/-woche
nach DIN EN 60062
code of manufacture:
place/year/week
acc. to DIN EN 60062

Schliesser 1-polig
Fuer Geraete der Klasse II geeignet

SPNO
suitable for appliances of class II

fuer Form und Lage FOR SHAPE AND LOC.	☉ =		Allgemeintoleranzen UNTOLERANCED DIMENSIONS					Pause COPY	Blatt SHEET		TYP	Zeichn./DRAWING NO.	Index			
			PROJEKTION	Abmasse und Nennmassbereiche Angaben in mm		Laenge LENGTH	Radien RADII		01							
									Original	Masstab						
fuer Winkel FOR ANGLE			ALL DIMENSIONS ARE IN MILLIMETRES	0-6	± 0.2	± 0.2		Din A4	SCALE 1 : 1	0	10	20	30mm	K	15513702	e
>6-15				± 0.4	±											
>15-30	± 0.4	±														
>30-70	±	±														
>70-120	±	±														
±				>120-200	±											
d	51422	11.04.07	BRC					CAD: UG_NX6	GERAETESCHALTER appliance switch							
c	35129	26.02.03	WJ					gez./DRAWN BY 12.03.07 BRC gepr./CHECKED BY								
b	23635	16.01.96	RS						 MARQUARDT							
a	21323	24.03.92	MUT	e	69572	02.03.11	HHE	Ersatz fuer/REPLACEMENT OF Zg.gl.Nr.v.17.10.89								
Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY		Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Marquardt:](#)

[1551.3702](#)