


Description:

This Dual P-Channel MOSFET uses advanced trench technology and design to provide excellent $R_{DS(on)}$ with low gate charge.

It can be used in a wide variety of applications.

Features:

- 1) $V_{DS}=-30V, I_D=-5.1A, R_{DS(on)}<55m\Omega @V_{GS}=10V$
- 2) Low gate charge.
- 3) Green device available.
- 4) Advanced high cell density trench technology for ultra $R_{DS(on)}$.
- 5) Excellent package for good heat dissipation.

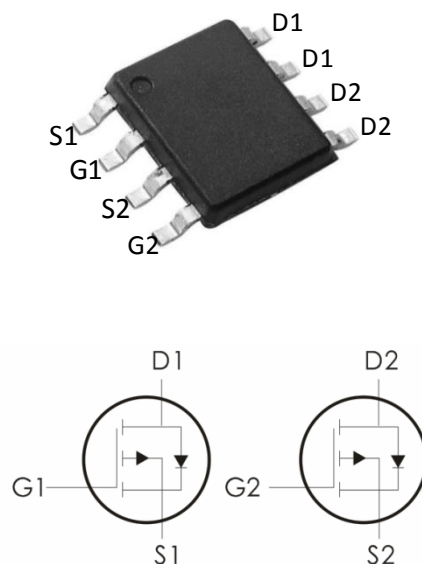

Absolute Maximum Ratings: ($T_C=25^\circ C$ unless otherwise noted)

Symbol	Parameter	Ratings	Units
V_{DS}	Drain-Source Voltage	-30	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Continuous Drain Current ¹	-5.1	A
	Continuous Drain Current- $T_C=100^\circ C$	---	
	Pulsed Drain Current ²	-20	
E_{AS}	Single Pulse Avalanche Energy ³	---	mJ
P_D	Power Dissipation ⁴	2.5	W
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to +150	$^\circ C$

Thermal Characteristics:

Symbol	Parameter	Max	Units
$R_{\theta JC}$	Thermal Resistance, Junction to Case ¹	---	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient ¹	50	

Electrical Characteristics: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Off Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =-0V, I _D =250 μ A	-30	-33	---	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{GS} =0V, V _{DS} =-24V	---	---	-1	μ A
I _{GSS}	Gate-Source Leakage Current	V _{GS} =± 20V, V _{DS} =0A	---	---	± 100	nA
On Characteristics						
V _{GS(th)}	GATE-Source Threshold Voltage	V _{GS} =V _{DS} , I _D =250 μ A	-1.	-1.6	-3	V
R _{DS(ON)}	Drain-Source On Resistance ²	V _{GS} =-10V, I _D =-5.1A	---	43	55	m Ω
		V _{GS} =-4.5V, I _D =-4.2A	---	62	90	
G _{FS}	Forward Transconductance	V _{DS} =-15V, I _D =-4.5A	4	7	---	S
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, f=1MHz	---	520	---	pF
C _{oss}	Output Capacitance		---	130	---	
C _{rss}	Reverse Transfer Capacitance		---	70	---	
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time	V _{DD} =-15V, I _D =-1A, R _{GEN} =6 Ω .V _{GS} =-10V	---	7	---	ns
t _r	Rise Time		---	13	---	ns
t _{d(off)}	Turn-Off Delay Time		---	14	---	ns
t _f	Fall Time		---	9	---	ns
Q _g	Total Gate Charge	V _{GS} =-10V, V _{DS} =-15V, I _D =-5.1A	---	11	---	nC
Q _{gs}	Gate-Source Charge		---	2.2	---	nC
Q _{gd}	Gate-Drain “Miller” Charge		---	3	---	nC
Drain-Source Diode Characteristics						
V _{SD}	Source-Drain Diode Forward Voltage ²	V _{GS} =0V, I _S =-5.1A	---	---	-1.2	V

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production

Typical Characteristics: ($T_c=25^\circ\text{C}$ unless otherwise noted)

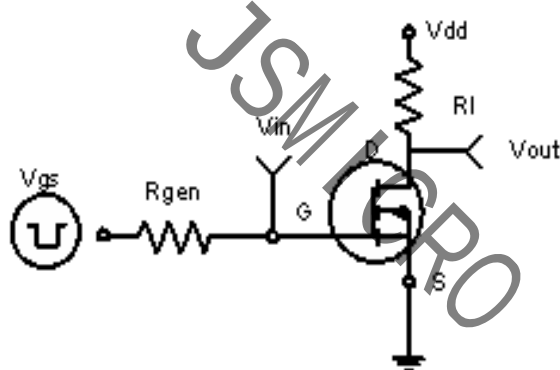


Figure 1: Switching Test Circuit

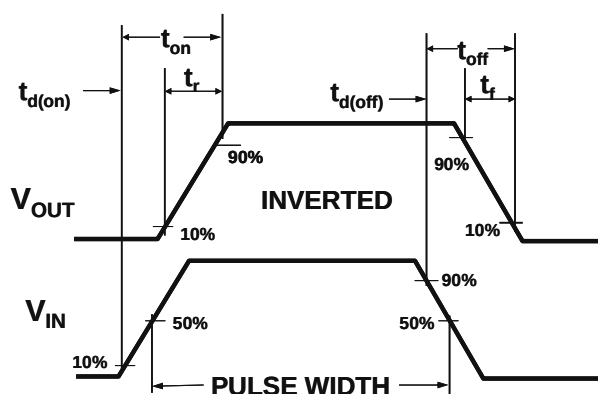


Figure 2: Switching Waveforms

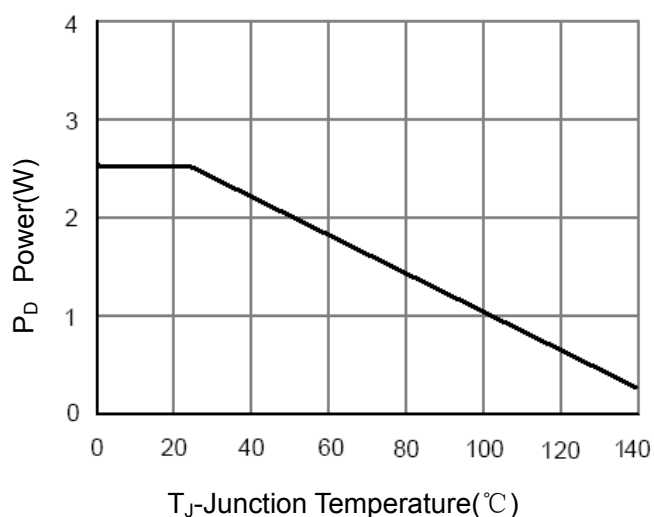


Figure 3 Power Dissipation



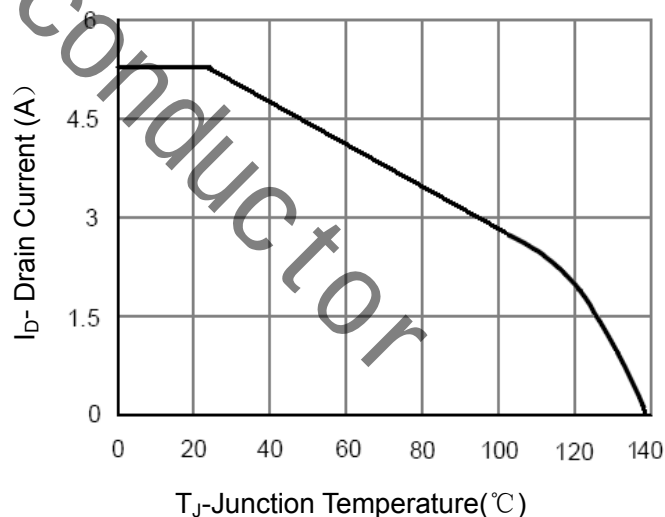


Figure 4 Drain Current

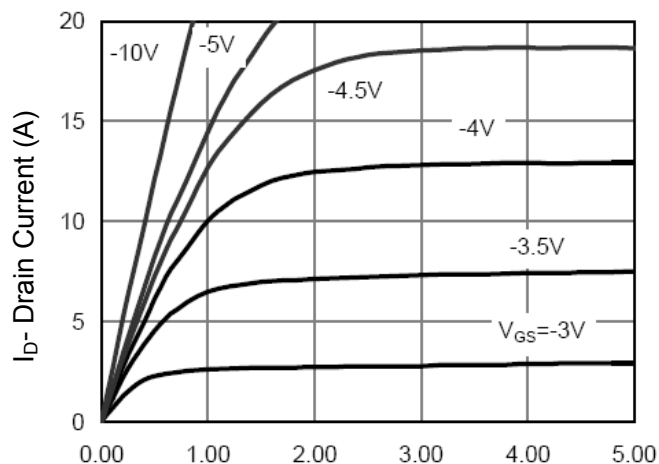


V_{DS} Drain-Source Voltage (V)

Figure 5 Output Characteristics

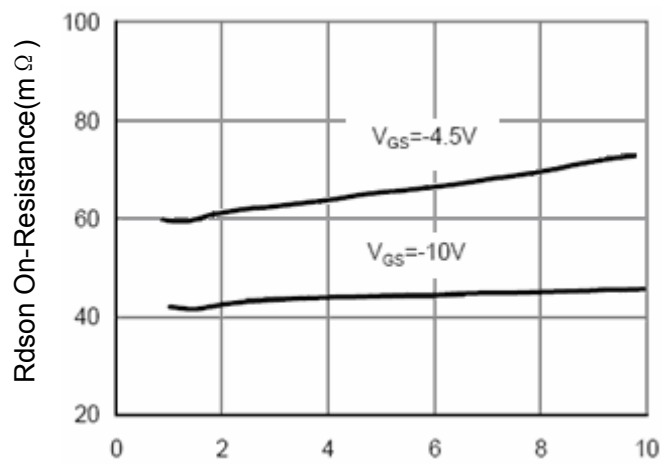


I_D Drain Current (A)

Figure 6 Drain-Source On-Resistance

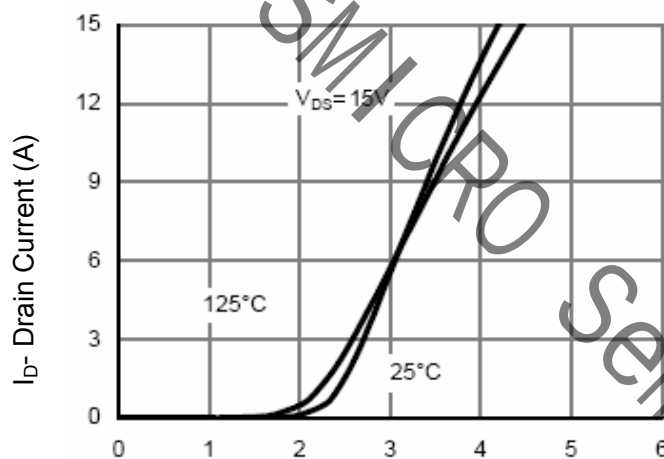


V_{GS} Gate-Source Voltage (V)

Figure 7 Transfer Characteristics

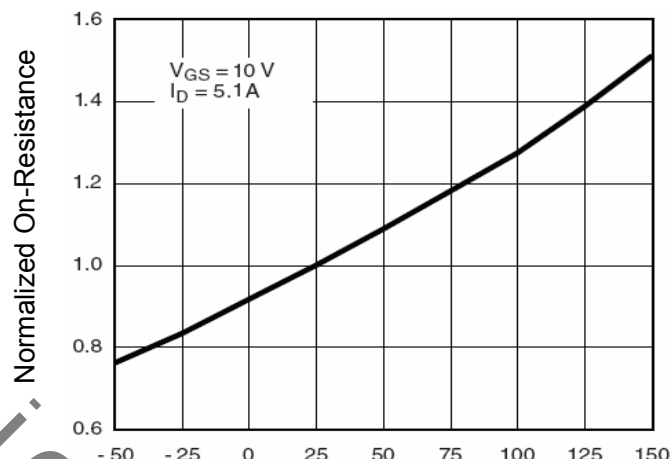


T_J -Junction Temperature($^{\circ}C$)

Figure 8 Drain-Source On-Resistance

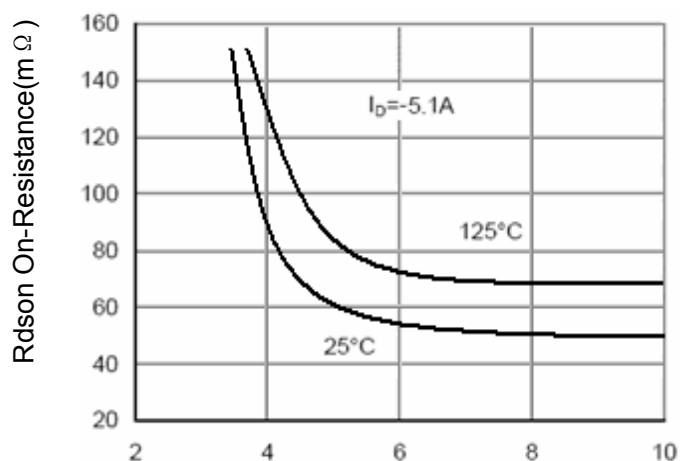


V_{GS} Gate-Source Voltage (V)

Figure 9 Rds(on) vs V_{GS}

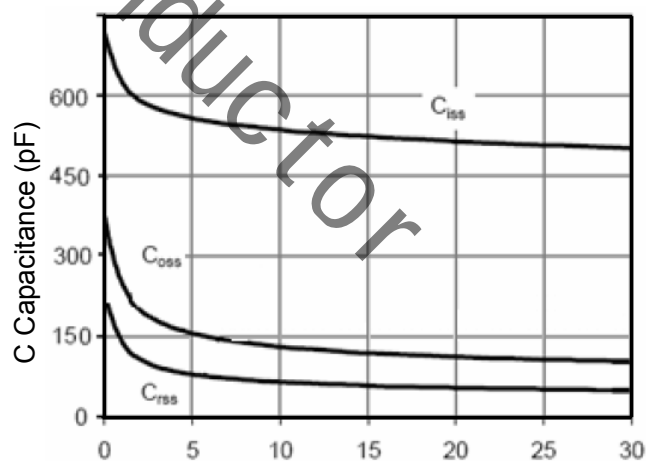


V_{DS} Drain-Source Voltage (V)


Figure 10 Capacitance vs V_{DS}

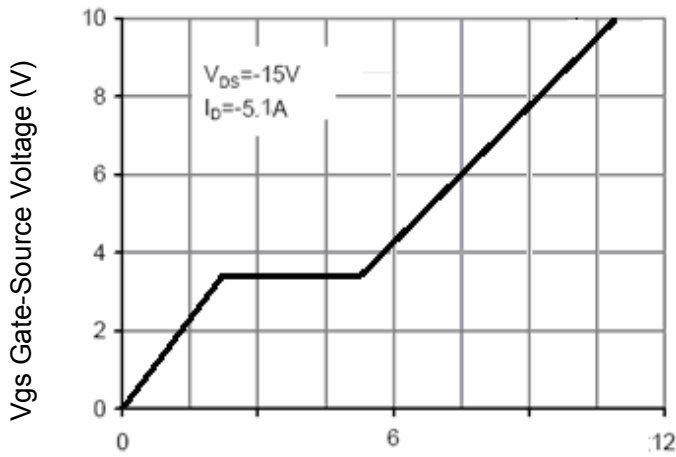

Qg Gate Charge (nC)
Figure 11 Gate Charge

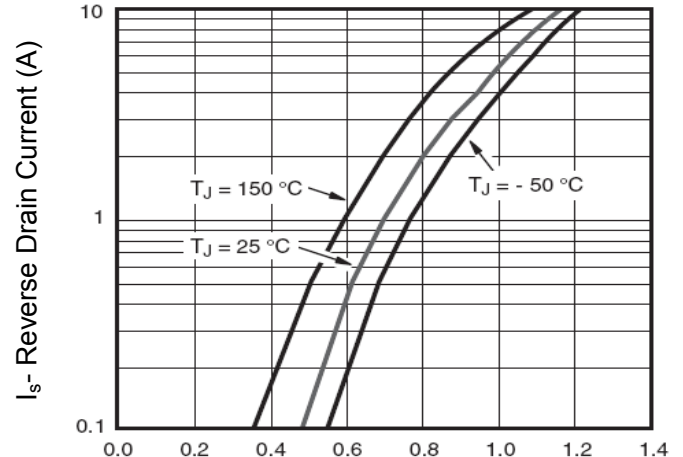

Vsd Source-Drain Voltage (V)
Figure 12 Source- Drain Diode Forward

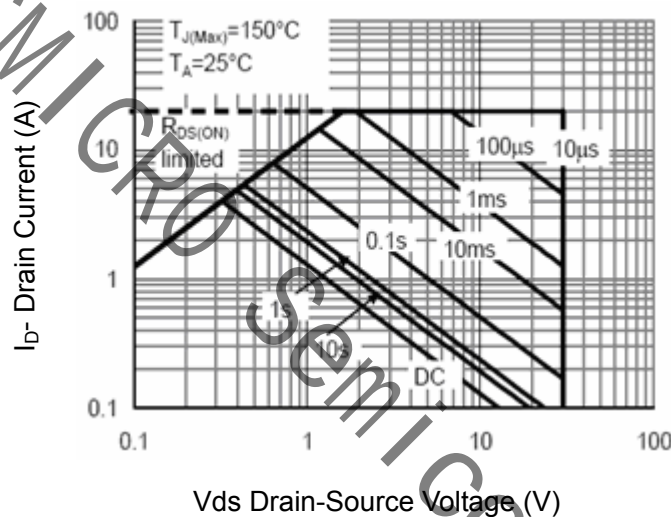

Vds Drain-Source Voltage (V)
Figure 13 Safe Operation Area


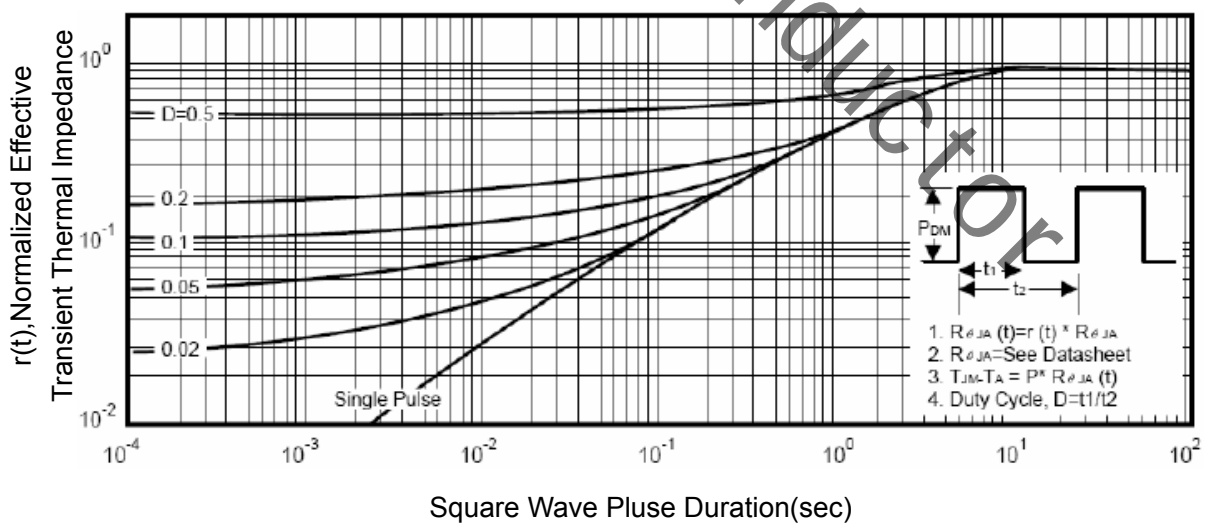



Figure 14 Normalized Maximum Transient Thermal Impedance

SOP8 Package Outline Dimensions

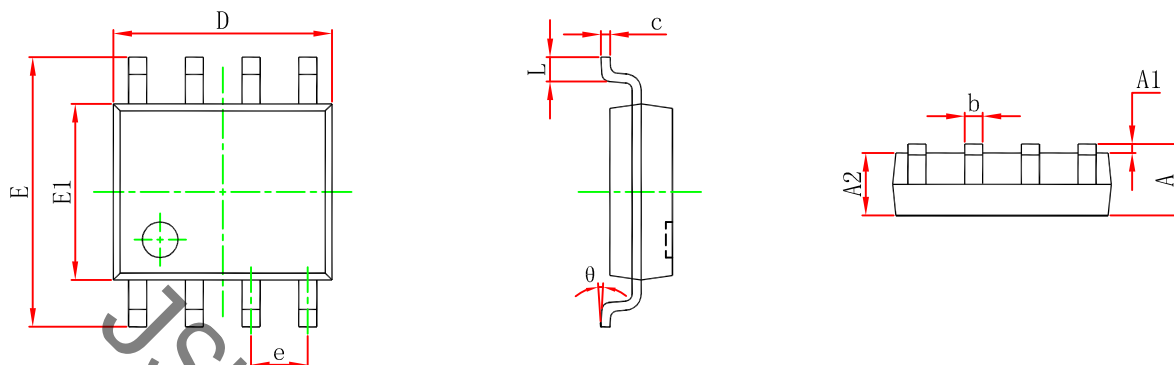

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.800	5.000	0.189	0.197
e	1.270 (BSC)		0.050 (BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

SOP8 Suggested Pad Layout

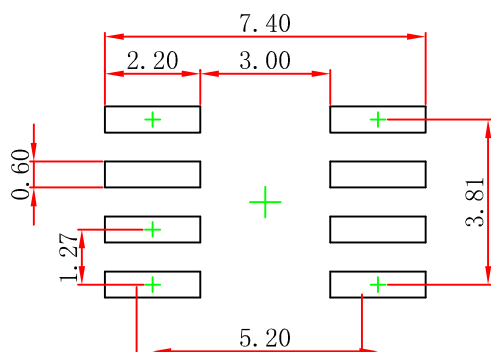

Note:
1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.