
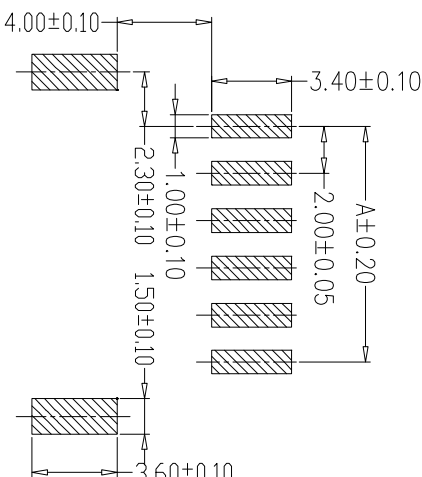
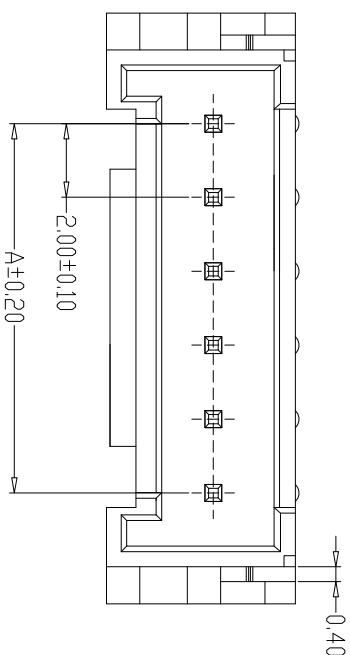
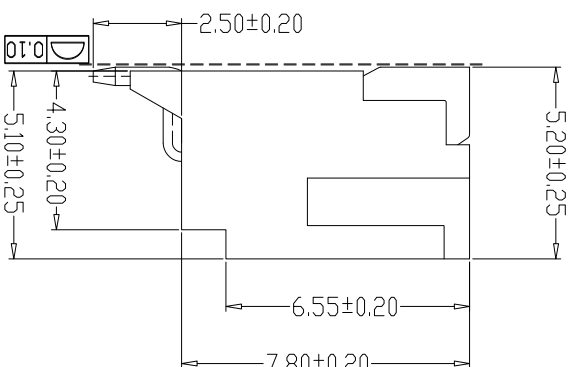


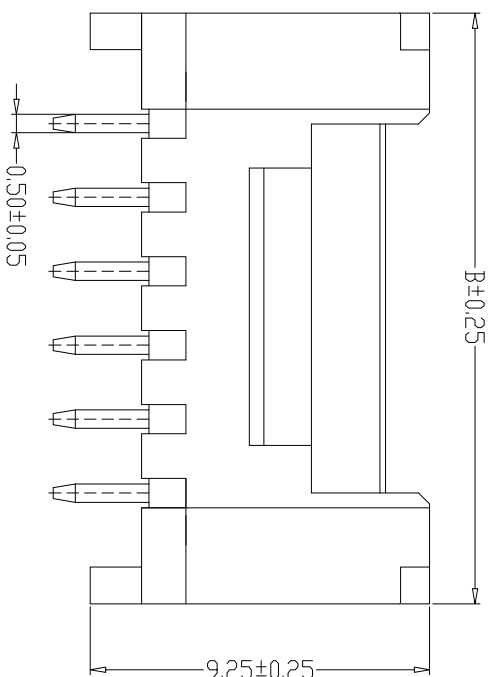

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 1000V AC/minute
- 7、Material: Wafer LCP, UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
A2006WF-02A	2.00	8.00
A2006WF-03A	4.00	10.00
A2006WF-04A	6.00	12.00
A2006WF-05A	8.00	14.00
A2006WF-06A	10.00	16.00
A2006WF-07A	12.00	18.00
A2006WF-08A	14.00	20.00
A2006WF-09A	16.00	22.00
A2006WF-10A	18.00	24.00
A2006WF-11A	20.00	26.00
A2006WF-12A	22.00	28.00
A2006WF-20A	38.00	44.00



X. ±0.5	X. ±
. X ±0.30	. X. ±
. XX ±0.20	. XX. ±
. XXX ±0.005, XXX. ±	

单位	mm
比例	
SCALE	

批准:	版本:	产品名称	HY固贴 WAFER SMT TYPE
审核:	A0	Production name	
制图:	页次:	产品料号	TH-A2006WF-NA
DRAWN BY	1/1	Product No	
2022.9.5	日期:	客户料号	
		Client No	

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd