



A B C D E

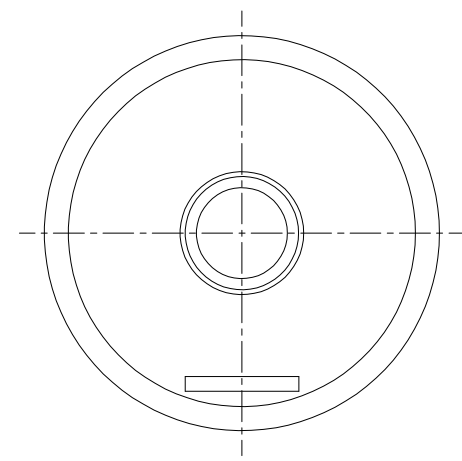

- G-Switch Specification:**
- 1. Operating temperature range: -40°C ~ +85°C
 - 2. Rated load: 15A 24V DC.
 - 3. Insulation resistance: 100MΩ min
 - 4. Withstand voltage: 500V AC/min
 - 5. Contact resistance: 30mΩ max
 - 6. Durability cycle: 5, 000 Cycles
 - 7. Insertion and extraction force: 3-30N

1	BASE	HIGH TEMPERATURE PLASTIC	BLACK
2	SHELL	BRASS(C3604)	NI PLATING
3	PIN	BRASS(C3604)	NI PLATING
4	CONTACT	BRASS(C5191)	NI PLATING
NO.	PART NAME	MATERIAL	REMARK

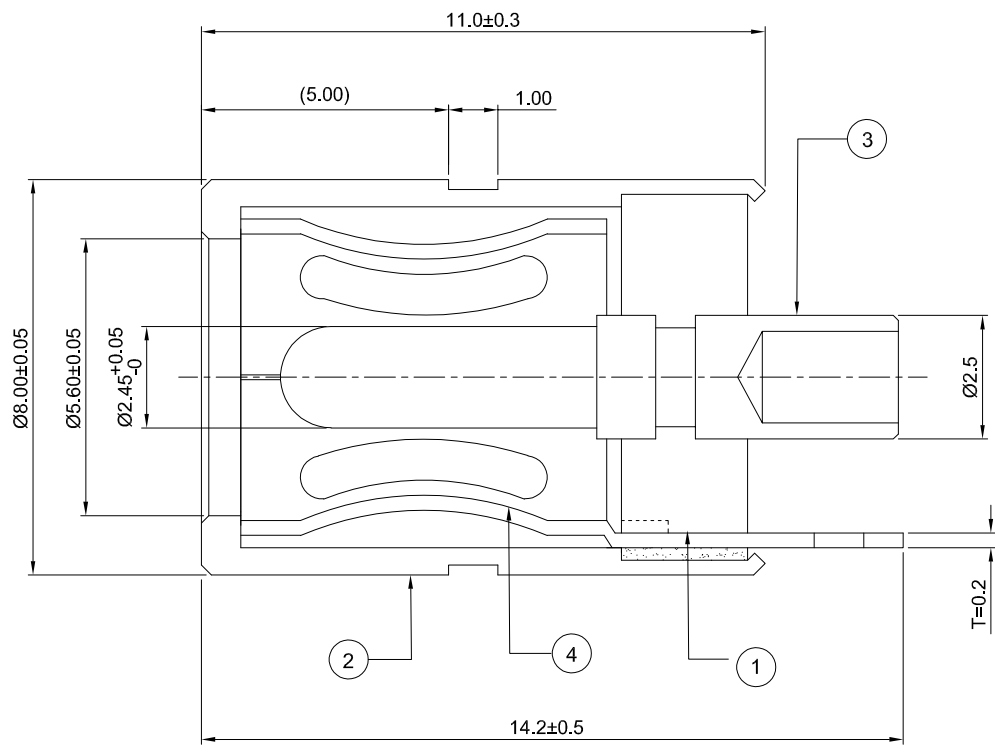

SCALE: 1:1	UNIT: mm	Title: Soldered Type DC Power Jack 5525 L=11.45 Ø2.45mm			
SIZE: A4		Molde Code: DC-S016C-D025-15A			
Unless otherwise General tolerance: X ±0.40 X.x ±0.30 X.xx ±0.20 X° ±5° X.x° ±3°		DRAWN	CHECKED	APPROVED	DATE
		Xia	Chen	Chen	2023.02.01



REV: A0	SHEET: 1/1
---------	------------

A B C D E