

CATALOG LISTING  
BZE6-2RQ841-BP

**M** BZE6-2RQ841-BP

DRAWING  
NUMBER

ISSUE

## REVISIONS

|    |               |
|----|---------------|
| A  | CO<br>72618   |
| 18 | TSM<br>SEP 92 |
| B  | CO<br>73655   |
| 22 | TSM<br>APR 93 |
| C  | 0016894       |
| 10 | KRB<br>NOV 05 |
| D  | 0033014       |

## RASTER

REPLACES

PR-19685

JG07

PSR

CHECK

10V C

|   |    |
|---|----|
| 3 | 10 |
| 4 |    |

|   |    |
|---|----|
| 4 | F  |
| 5 | CK |

|    |   |
|----|---|
| 91 | 0 |
|----|---|

11 DEC


TSM

|       |  |
|-------|--|
| CHECK |  |
|-------|--|

DEC 5


|   |    |
|---|----|
| M | 1C |
|---|----|

|   |
|---|
| 2 |
|---|

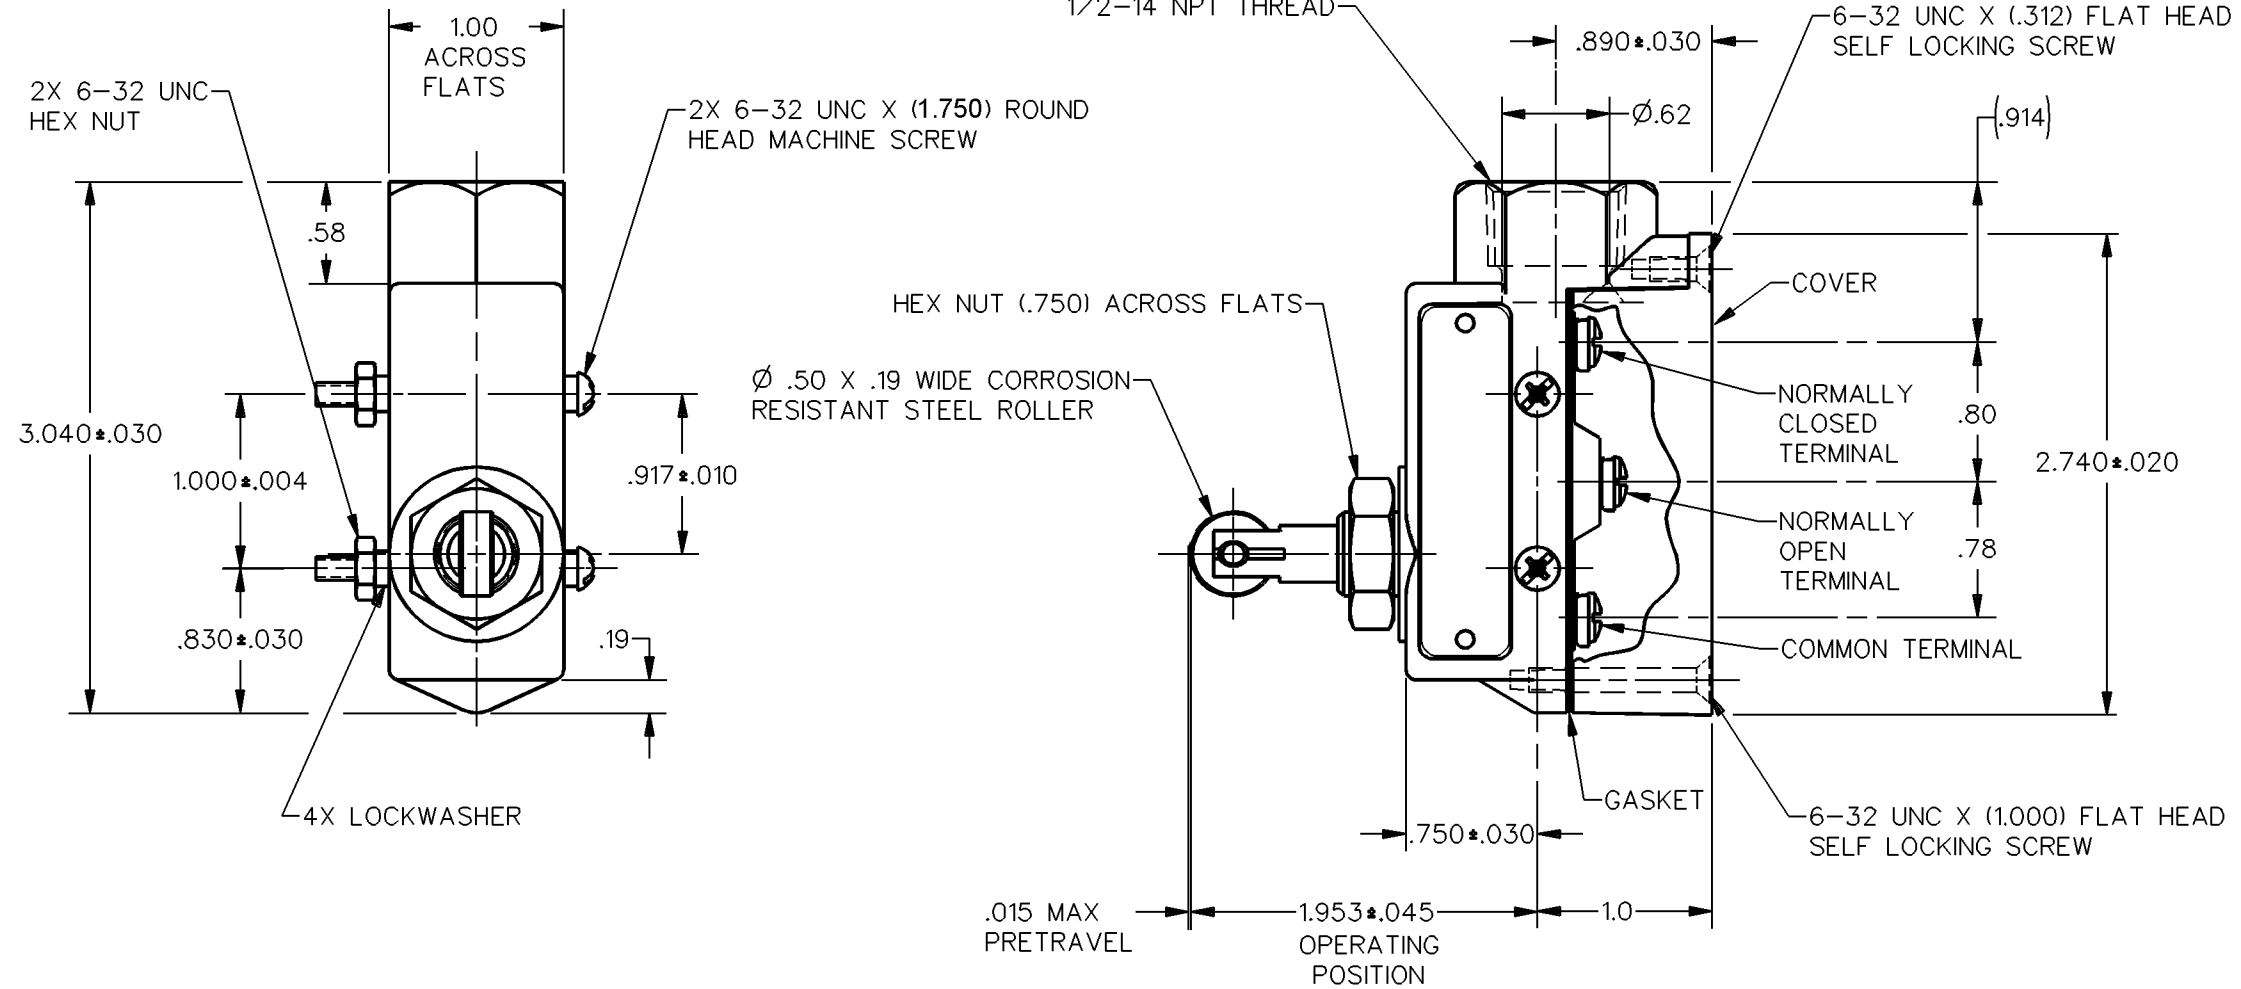

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



|       |      |
|-------|------|
| SCALE | FULL |
|-------|------|

DO NOT SCALE PRINT

## CHARACTERISTICS

```

OPERATING FORCE — — — — — 9-13 OZ
RELEASE FORCE — — — — — 4 OZ MIN
DIFFERENTIAL TRAVEL — — — — .002 MAX
OVERTRAVEL — — — — — .140 MIN
SWITCH - BASIC REPLACEMENT -- BZ-2RQ784

```

## ELECTRICAL DATA

|                     |
|---------------------|
| CONTACT ARRANGEMENT |
| S P D T             |

L74 15A 125, 250 OR 480 VAC  
2A 600 VAC  
1/8HP 125 VAC, 1/4HP 250 VAC  
1/2A 125 VDC, 1/4A 250 VDC

**CE 1.5A, 240 Vac**



WEIGHT .56 LB

NOTE

1 - 3X 6-32 UNC X (.219) BINDING HEAD TERMINAL SCREW  
AND CUPWASHER  
2 - SEAL RATING: NEMA 1  
IP40

ANSI Y14.5M-1982 APPLIES