

DATASHEET


C1210Z5U250-224ZNE

GENERAL PURPOSE CERAMIC CAPACITORS (C SERIES)

1210, Z5U, 25V, 0.22uF, +80-20%, 100% matte Tin(Sn) over Nickel



VENKEL LTD.

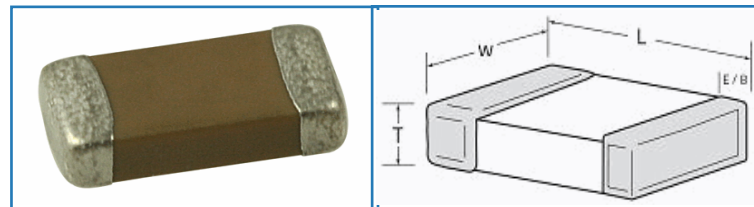

SIZE SPECIFICATIONS units: inches

Length:	0.126
Width:	0.098
T(max):	0.075
Min E/B:	.020 ± .01
Size(EIA):	1210

COMPONENT SPECIFICATIONS

Category:	Ceramic Capacitors
Series:	General Purpose (C Series)
Size:	1210
Dielectric:	Z5U
Voltage:	25V
Capacitance:	0.22uF
Tolerance:	+80-20%
Termination:	100% matte Tin(Sn) over Nickel
Packaging:	E
Quantity per Reel:	2,000

DIELECTRIC SPECIFICATIONS

Temperature Coefficient:	+22% - 56%Δ°C MAX
Temperature Voltage Coefficient	Z5U not applicable
Ageing:	5% per decade hour, typical
Withstanding Voltage:	2.5 times VDCW
Operating Temp:	+10°C to +85°C
Dissipation Factor:	See C Series Datasheet

ENVIRONMENTAL INFORMATION

RoHS Status	6 of 6 Compliant
REACH Status	Compliant
Halogen Status	Halogen Free
Conflict Mineral Status	Conflict Mineral Free
Moisture Sensitivity Level	MSL1

REFLOW PROFILE

Max Reflow Temperature	260 °C
Number of Reflow Cycles	2
Time at Max Reflow Temp.	10 sec

REEL DIMENSIONS units: mm

Tape	B min	C	A(7")	A(13")	D Min	N Min	G	T max
8mm	0.30	13 ± .05	178 ± 2.0	330 ± 2.0	20.20	50.00	10 ± 1.5	14.90

TAPING SPECIFICATIONS units: mm

A	B	W	F	E	Po
2.9 ± 0.2	3.6 ± 0.2	8.0 ± 0.2	3.5 ± 0.1	1.75 ± 0.1	4.0 ± 0.1
Pz	D	T	P	To	T(E)
2.0 ± 0.05 - 0.0	1.5 ± 0.1 - 0.0		4.0 ± 0.1	2.5 MAX	0.6 MAX