

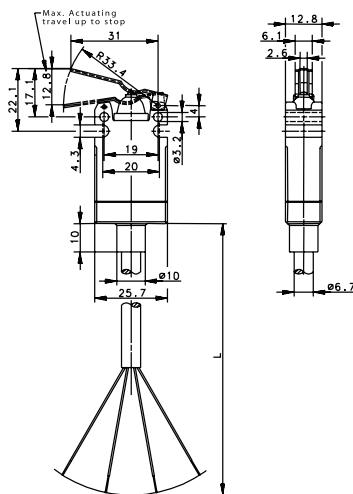


EEX FH

609.0145.007
EEX-SU1Z FH -2M-




609.7152.052
ENM2-SU1Z EX IW -2M-




—


609.7152.054
ENM2-SU1Z EX IW -5M-



609.0145.010
EEX-SU1Z FH -9M-



609.7152.055
ENM2-SU1Z EX IW -9M-



 || 2 G EEx d || C T6

 II 2 G EEx d IICT6

Maximum Switching Voltage	230V	230V
Maximum Switching Amperage	5A	5A
B10d	4 Million	4 Million
Mechanical Service Life	2 x 10 ⁶	2 x 10 ⁶
Switching Frequency	≤ 120/min	≤ 50/min
Operating Temperature	-20 °C to +65 °C	-20 °C to +65 °C
Protection Rating	IP66 / IP67	IP66 / IP67
Utilization Category	AC 15, 240 V / 3 A; DC 13, 250 V / 0.27 A	AC 15, 240 V / 3 A; DC 13, 250 V / 0.27 A
Rate Insulation Voltage	250VAC	250VAC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[609.0145.010](#) [609.0145.007](#) [609.7152.055](#) [609.7152.052](#)