



**ALPHA & OMEGA**  
SEMICONDUCTOR

**AO4498**

**30V N-Channel MOSFET**

### General Description

The AO4498 combines advanced trench MOSFET technology with a low resistance package to provide extremely low  $R_{DS(ON)}$ . This device is ideal for load switch and battery protection applications.



### Product Summary

$V_{DS}$  (V) = 30V  
 $I_D$  = 18A      ( $V_{GS}$  = 10V)  
 $R_{DS(ON)} < 5.5\text{m}\Omega$       ( $V_{GS}$  = 10V)  
 $R_{DS(ON)} < 7.5\text{m}\Omega$       ( $V_{GS}$  = 4.5V)

100% UIS Tested  
100% Rg Tested



SOIC-8

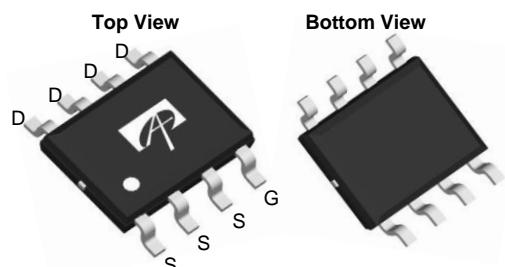

### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	$V_{DS}$	30	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current <sup>A</sup>	$I_D$	18	A
$T_C=70^\circ\text{C}$		14	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	140	
Avalanche Current <sup>C</sup>	$I_{AR}$	42	A
Repetitive avalanche energy $L=0.1\text{mH}$ <sup>C</sup>	$E_{AR}$	88	mJ
Power Dissipation <sup>B</sup>	$P_D$	3.1	W
$T_C=70^\circ\text{C}$		2	
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C

### Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient <sup>A</sup>	$R_{\theta JA}$	31	40	°C/W
Maximum Junction-to-Ambient <sup>A,D</sup>		59	75	°C/W
Maximum Junction-to-Lead	$R_{\theta JL}$	16	24	°C/W

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	30	36.5		V
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{DS}=30\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			1 5	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}= \pm 20\text{V}$			100	nA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	1.3	1.8	2.5	V
$I_{\text{D(ON)}}$	On state drain current	$V_{GS}=10\text{V}, V_{DS}=5\text{V}$	140			A
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=18\text{A}$ $T_J=125^\circ\text{C}$		4.6	5.5	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}, I_D=16\text{A}$		6	7.5	$\text{m}\Omega$
$g_{\text{FS}}$	Forward Transconductance	$V_{DS}=5\text{V}, I_D=18\text{A}$		53		S
$V_{\text{SD}}$	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.7	1	V
$I_s$	Maximum Body-Diode Continuous Current				4	A
<b>DYNAMIC PARAMETERS</b>						
$C_{\text{iss}}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$		1910	2300	pF
$C_{\text{oss}}$	Output Capacitance			316		pF
$C_{\text{rss}}$	Reverse Transfer Capacitance			227		pF
$R_g$	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	0.7	1.4	2.1	$\Omega$
<b>SWITCHING PARAMETERS</b>						
$Q_g(10\text{V})$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=15\text{V}, I_D=18\text{A}$		37	44.5	nC
$Q_g(4.5\text{V})$	Total Gate Charge			18		nC
$Q_{\text{gs}}$	Gate Source Charge			4.8		nC
$Q_{\text{gd}}$	Gate Drain Charge			11		nC
$t_{\text{D(on)}}$	Turn-On DelayTime	$V_{GS}=10\text{V}, V_{DS}=15\text{V}, R_L=0.83\Omega, R_{\text{GEN}}=3\Omega$		8.1		ns
$t_r$	Turn-On Rise Time			8.6		ns
$t_{\text{D(off)}}$	Turn-Off DelayTime			29		ns
$t_f$	Turn-Off Fall Time			8		ns
$t_{\text{rr}}$	Body Diode Reverse Recovery Time	$I_F=18\text{A}, dI/dt=500\text{A}/\mu\text{s}$		14	17	ns
$Q_{\text{rr}}$	Body Diode Reverse Recovery Charge	$I_F=18\text{A}, dI/dt=500\text{A}/\mu\text{s}$		40		nC

A. The value of  $R_{\text{BJA}}$  is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ . The value in any given application depends on the user's specific board design.

B. The power dissipation  $P_D$  is based on  $T_{J(\text{MAX})}=150^\circ\text{C}$ , using  $\leq 10\text{s}$  junction-to-ambient thermal resistance.

C. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=150^\circ\text{C}$ . Ratings are based on low frequency and duty cycles to keep initial  $T_J=25^\circ\text{C}$ .

D. The  $R_{\text{BJA}}$  is the sum of the thermal impedance from junction to lead  $R_{\text{BLJ}}$  and lead to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using  $<300\mu\text{s}$  pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-ambient thermal impedance which is measured with the device mounted on 1in<sup>2</sup> FR-4 board with

APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT SPECIFICATIONS WITHOUT NOTICE. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO EVALUATE SUITABILITY OF THE PRODUCT FOR THEIR INTENDED APPLICATION. CUSTOMER SHALL COMPLY WITH APPLICABLE LEGAL REQUIREMENTS, INCLUDING ALL APPLICABLE EXPORT CONTROL RULES, REGULATIONS AND LIMITATIONS.

AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:

[http://www.aosmd.com/terms\\_and\\_conditions\\_of\\_sale](http://www.aosmd.com/terms_and_conditions_of_sale)



## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

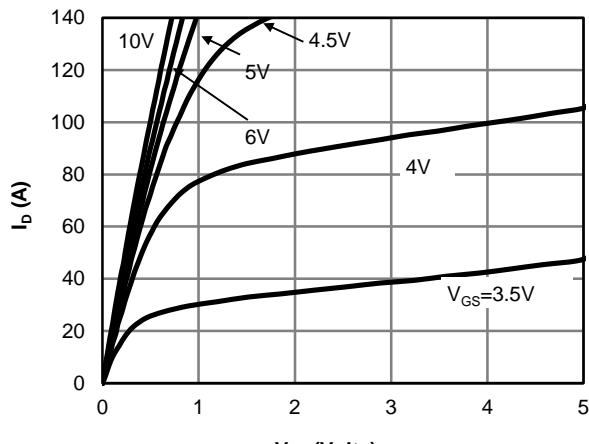


Fig 1: On-Region Characteristics (Note E)

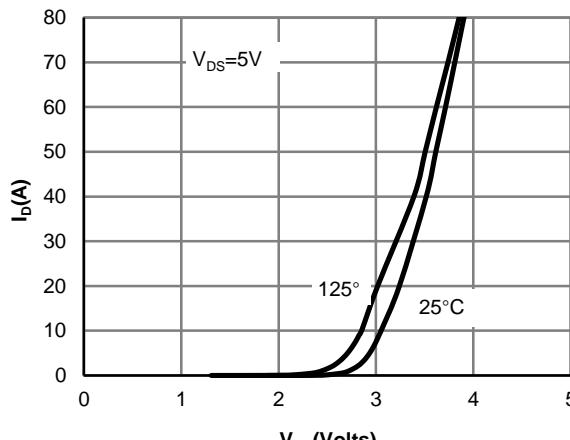


Figure 2: Transfer Characteristics (Note E)

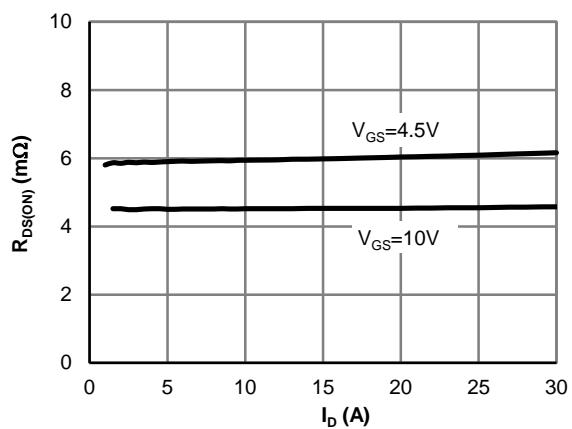


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

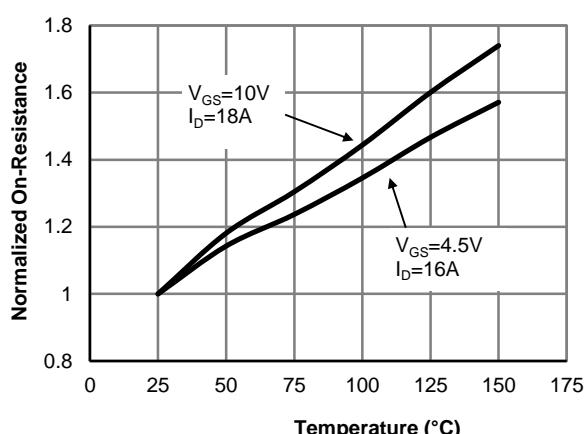


Figure 4: On-Resistance vs. Junction Temperature (Note E)

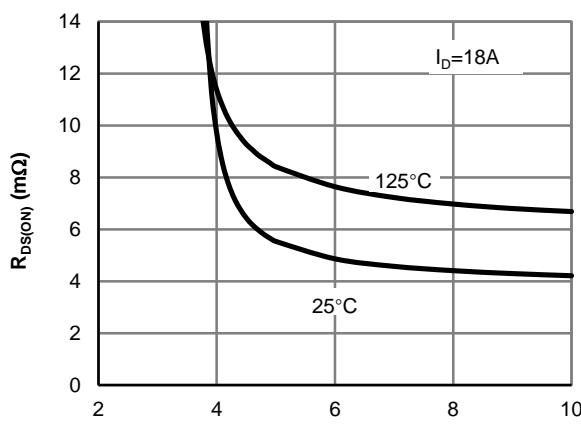


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

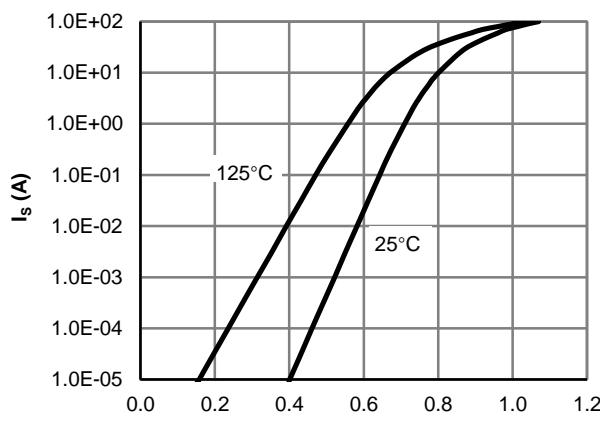
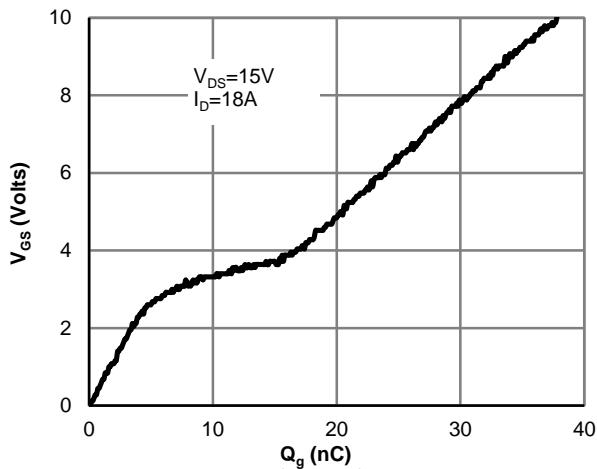
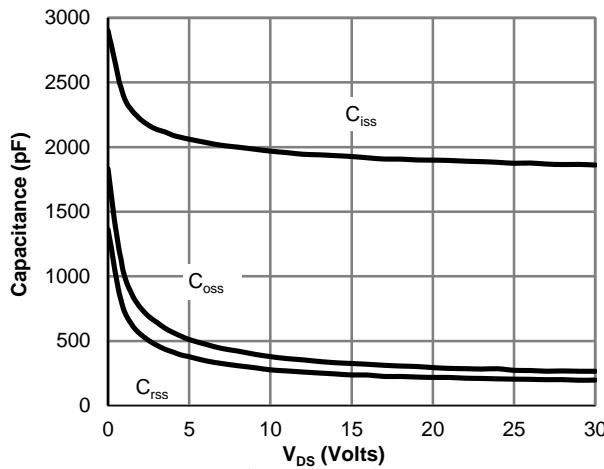
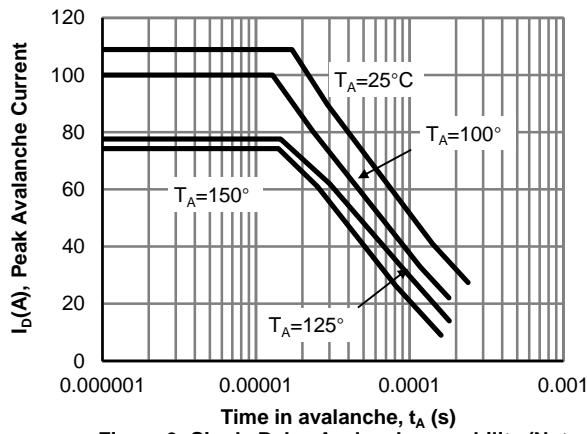
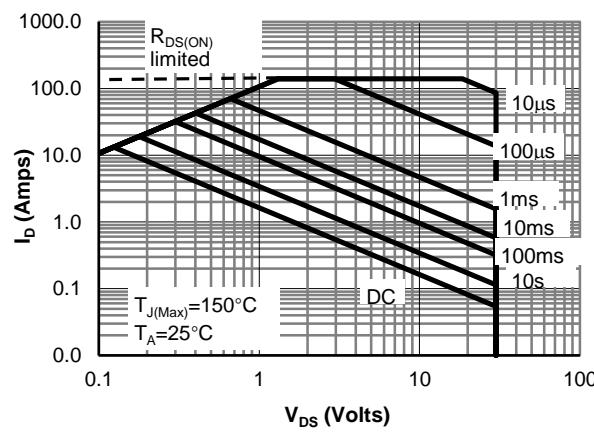
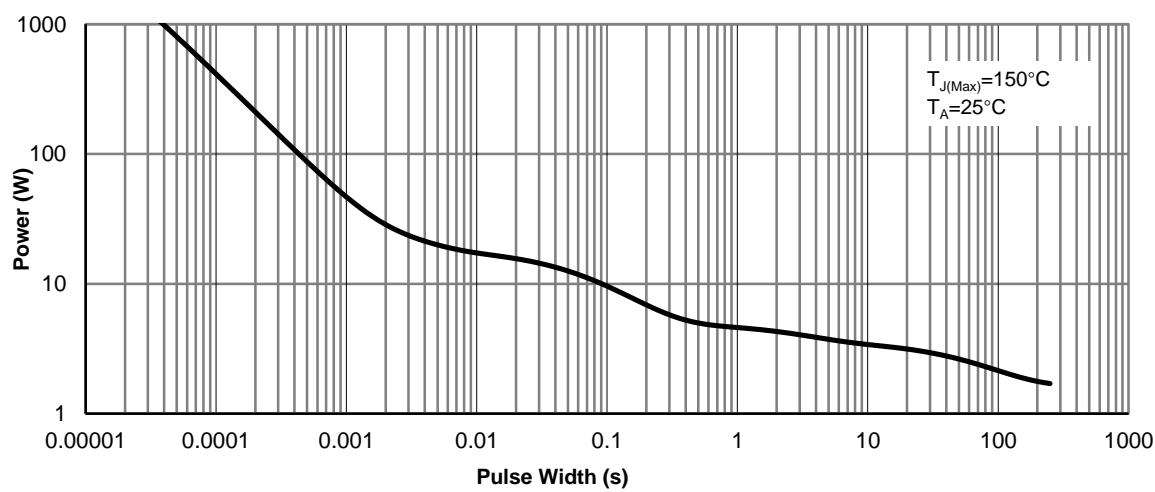
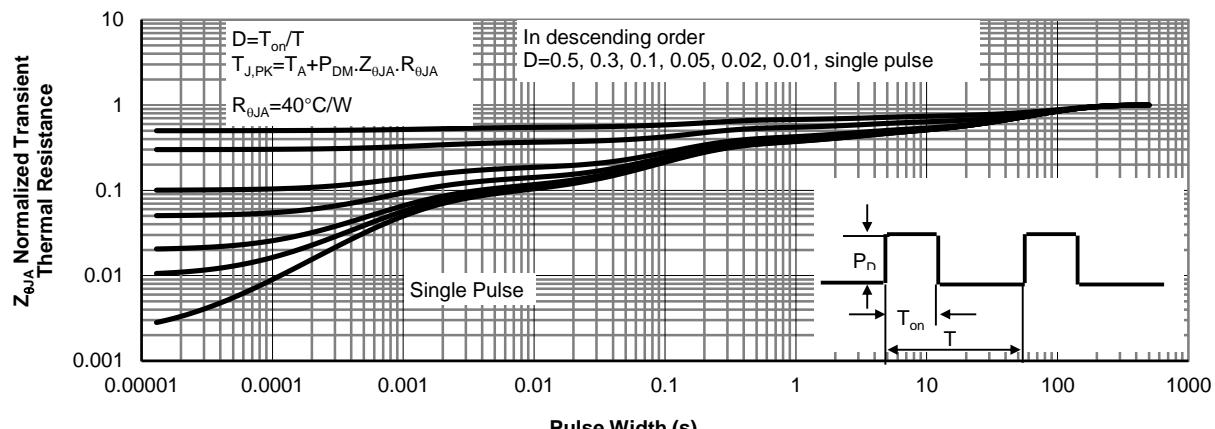
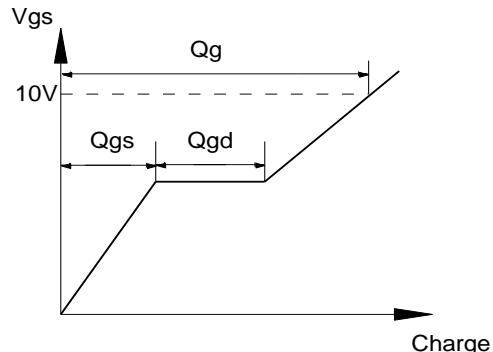
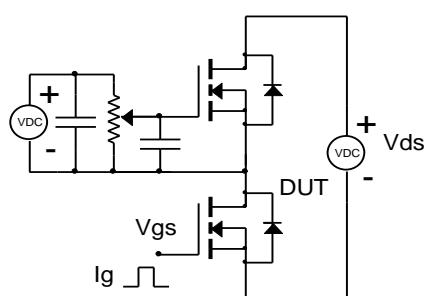


Figure 6: Body-Diode Characteristics (Note E)

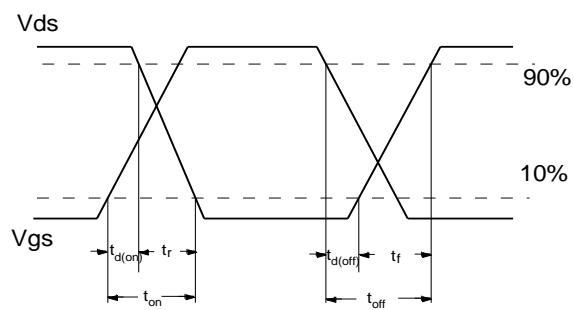
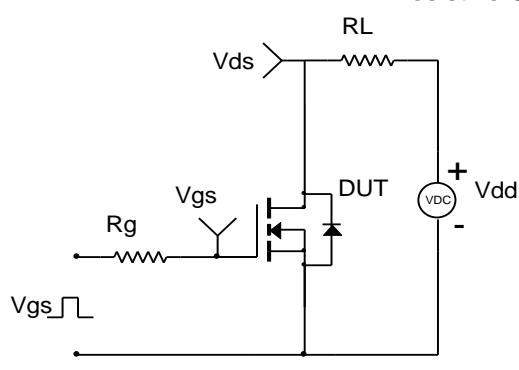
**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Figure 7: Gate-Charge Characteristics**

**Figure 8: Capacitance Characteristics**

**Figure 9: Single Pulse Avalanche capability (Note C)**

**Figure 10: Maximum Forward Biased Safe Operating Area (Note F)**

**Figure 11: Single Pulse Power Rating Junction-to-Ambient (Note F)**

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Figure 12: Normalized Maximum Transient Thermal Impedance (Note F)**

### Gate Charge Test Circuit & Waveform



### Resistive Switching Test Circuit & Waveforms



### Diode Recovery Test Circuit & Waveforms

