




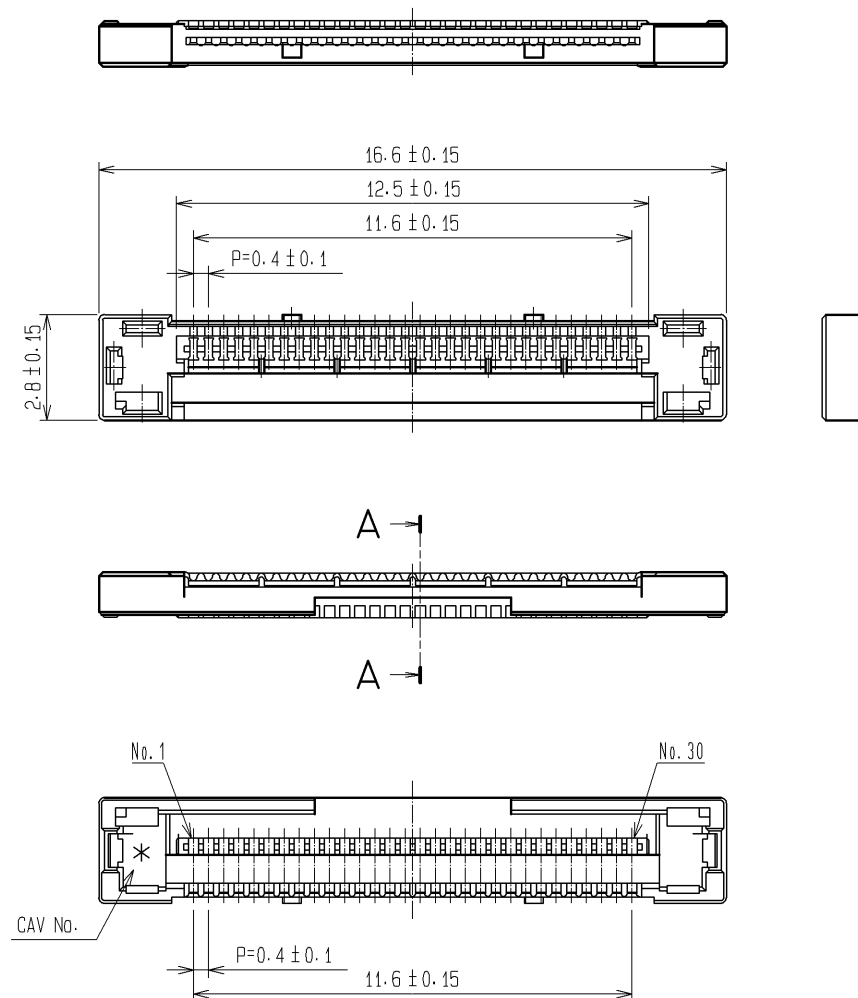


RECOMMENDED CABLE SUBASSEMBLY

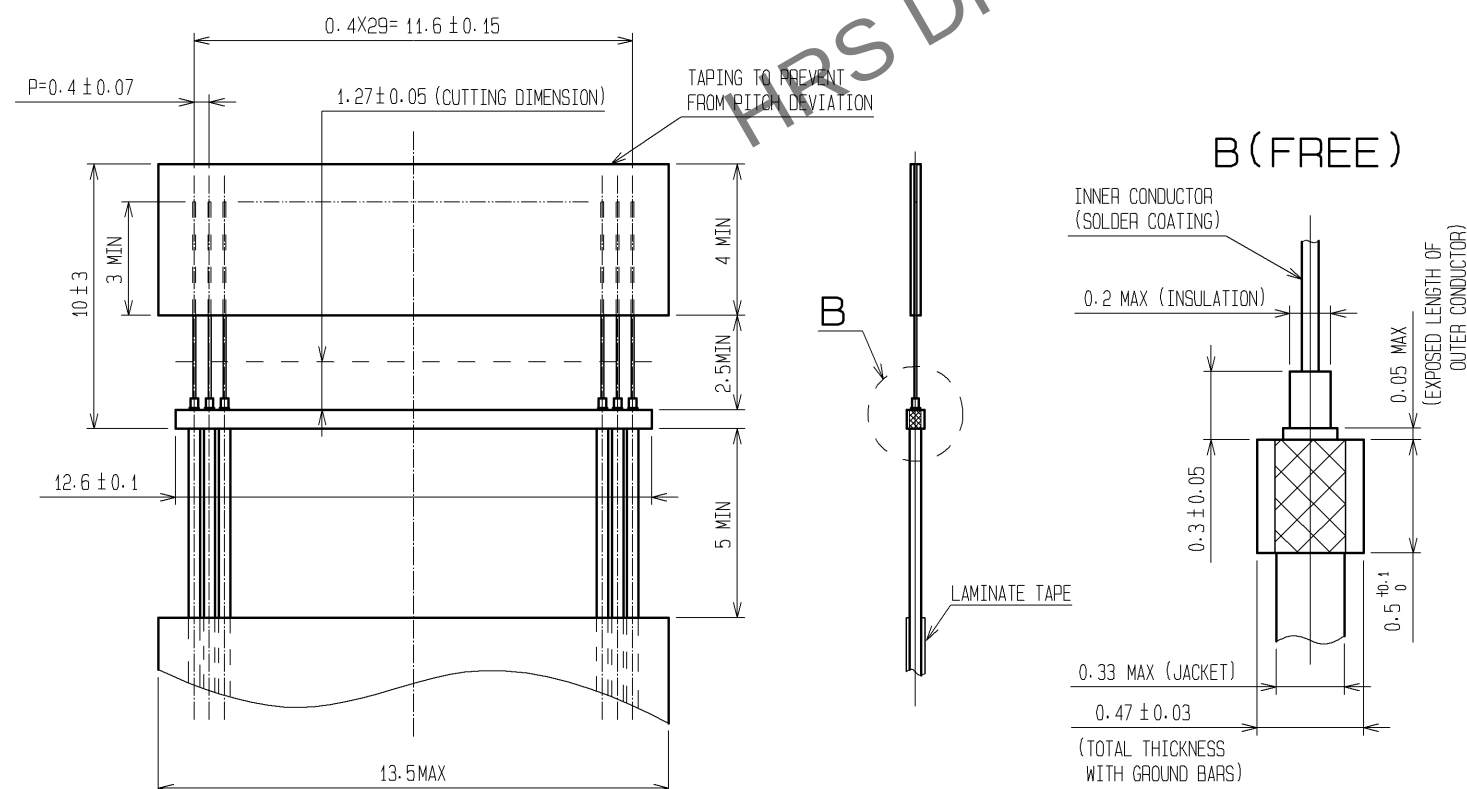

A-A (FREE)

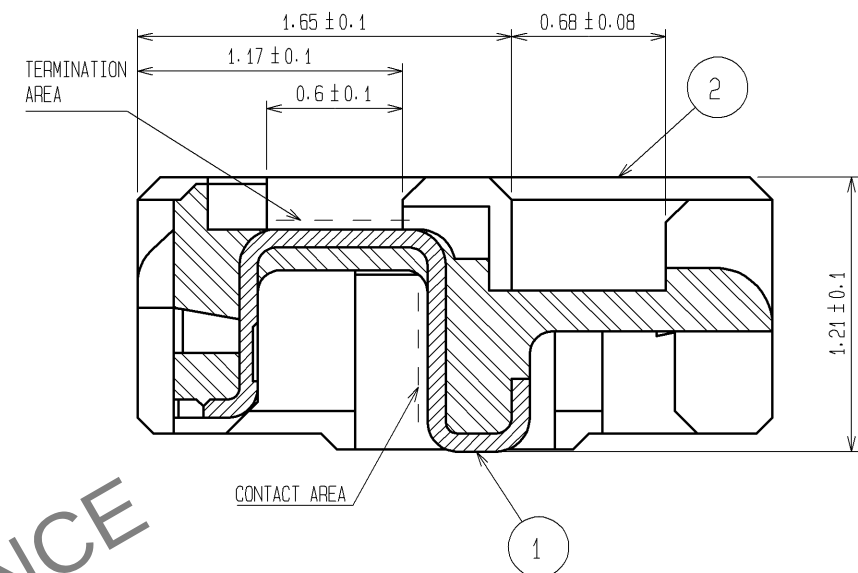

CABLE TERMINATION FIGURE(FREE)

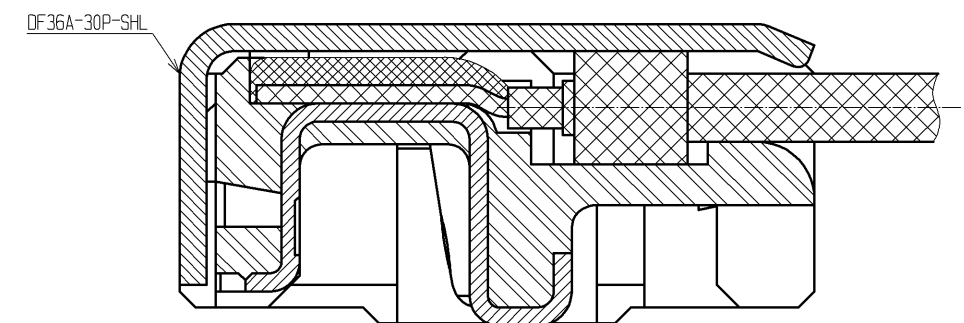


- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE (AWG#42-AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS "CONNECTOR UNIT AND METAL SHIELDING".
REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No.

ITEM No.	PART NAME	PART No.	CODE No.
1, 2	CONNECTOR UNIT	DF36-30P-0.4SD(55)	CL662-4018-3-55
-	METAL SHIELDING	DF36A-30P-SHL	CL662-4019-6-00

1	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.1μm min TERMINATION AREA : GOLD PLATING 0.1μm min UNDER PLATING : NICKEL PLATING 1μm min	5	PS	BLACK
NO.	MATERIAL	FINISH, REMARKS	4	POLYESTER	CLEAR
UNITS	mm	SCALE	3	PS	CLEAR
mm	5 : 1	COUNT	2	LCP	UL94V-0, BLACK
DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE		
APPROVED : MH. YAMANE	14. 05. 27	DRAWING NO.	EDC3-315347-03		
CHECKED : MH. TSUCHIDA	14. 05. 27	PART NO.	DF36-30P-0.4SD(55)		
DESIGNED : AH. MIYAZAKI	14. 05. 26	CODE NO.	CL662-4018-3-55		
DRAWN : AH. MIYAZAKI	14. 05. 26				

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

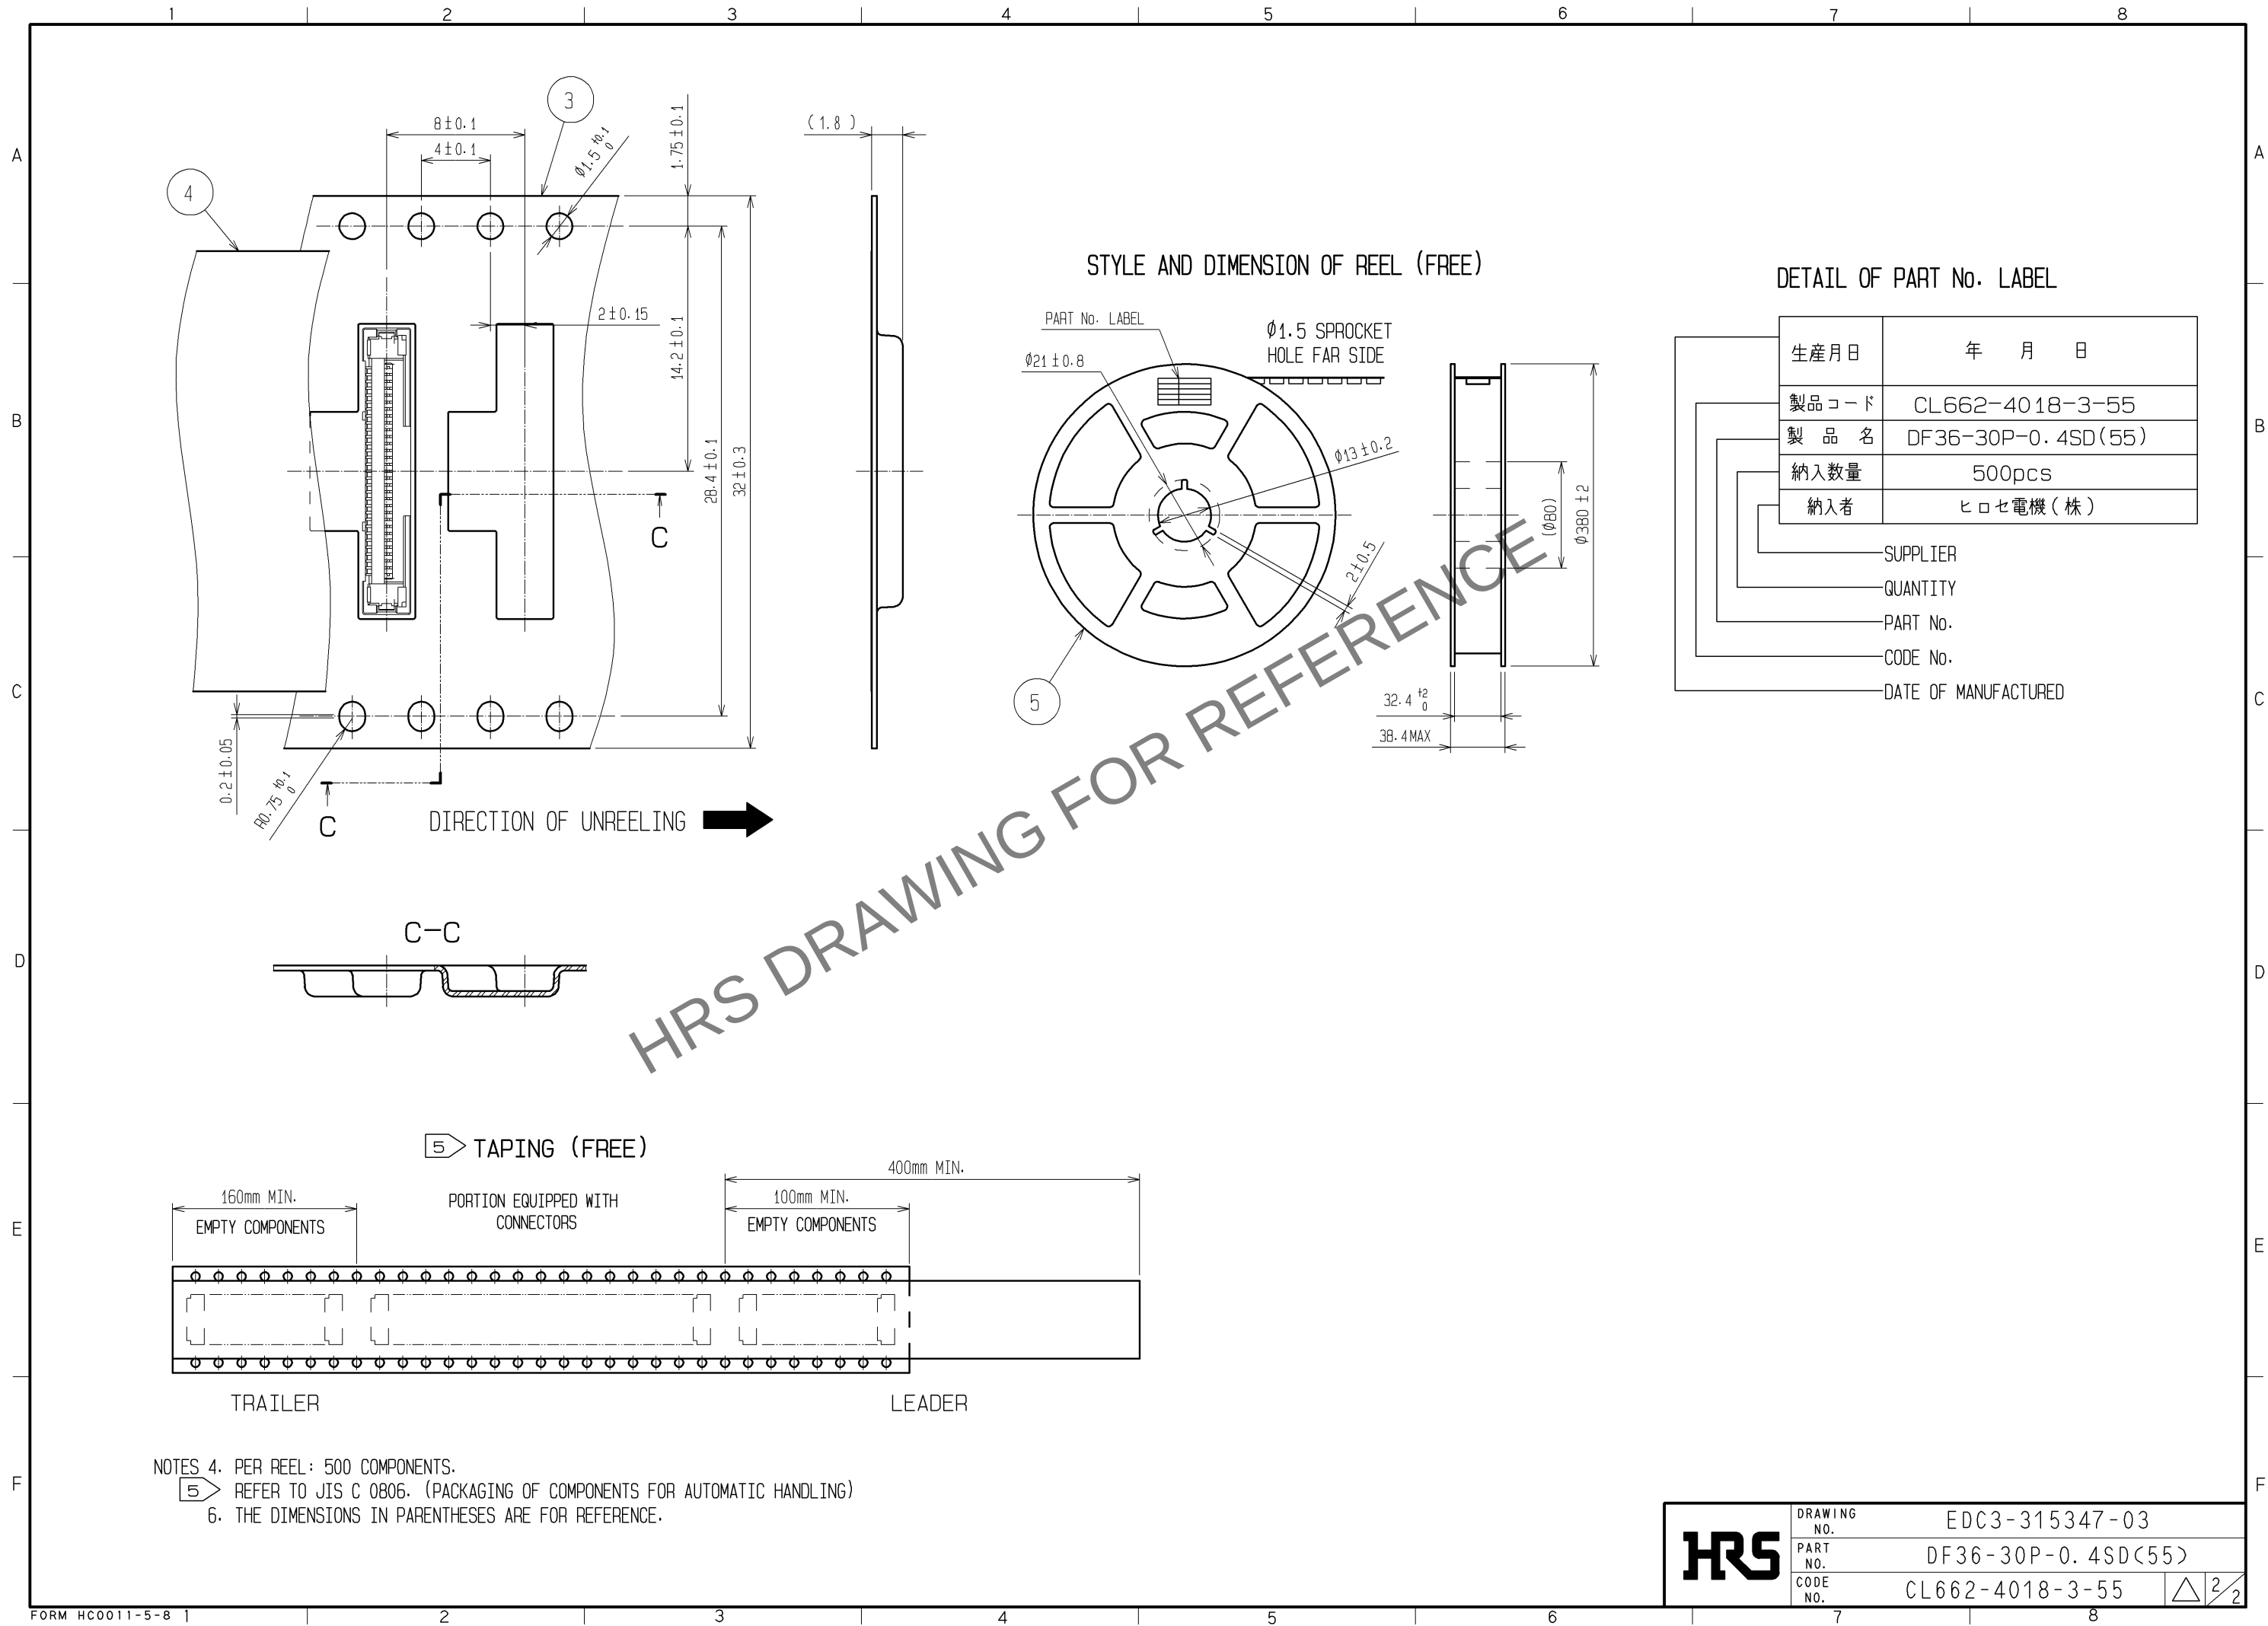

HRS	DRAWING NO.	EDC3-315347-03
	PART NO.	DF36-30P-0.4SD(55)
	CODE NO.	CL662-4018-3-55