





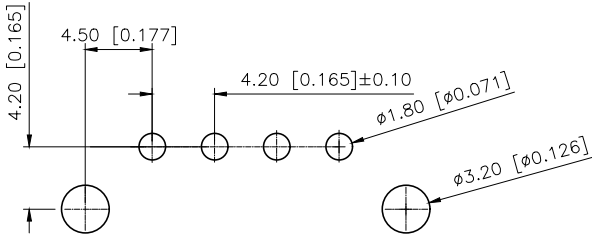


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.07.31	阿 树

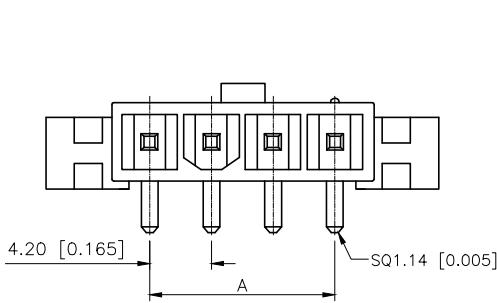


- SPECIFICATIONS
- Voltage rating:600V AC/DC
 - Current rating:9A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-45°C+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ
- PART NO.:
- X9357 W R-XX-ES NO SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧
- ① Series No
② Category:W-Wager
③ Welding Board Angle:R-Stright 90°
④ Row No.Pin No:XX-02~06 P
⑤ Special NO:ES-has ears and screw holes
⑥ Material:NO-PA66 UL94V-0;
N2-PA66 UL94V-2
⑦ Plating:SN-Bright tin plating
⑧ Color: Blank-Natural Color

Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

X9357WR-XXES-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X9357H	1000Pas
X9357WR-XXES-N2SN	Nylon 66 UL 94V-2				
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal	Q'ty/Bag

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

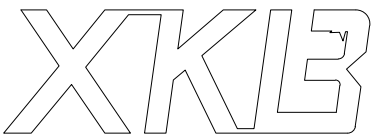

DESIGN	阿 树	VIEW:	MODEL TYPE: 4.20 mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X9357WR-XXES-N0SN
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1