



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2017-03-15	Frank Deng	Change Rev.01 To Rev.A
B	LEN1770175	2017-07-03	Frank Deng	Change Note



Conn.

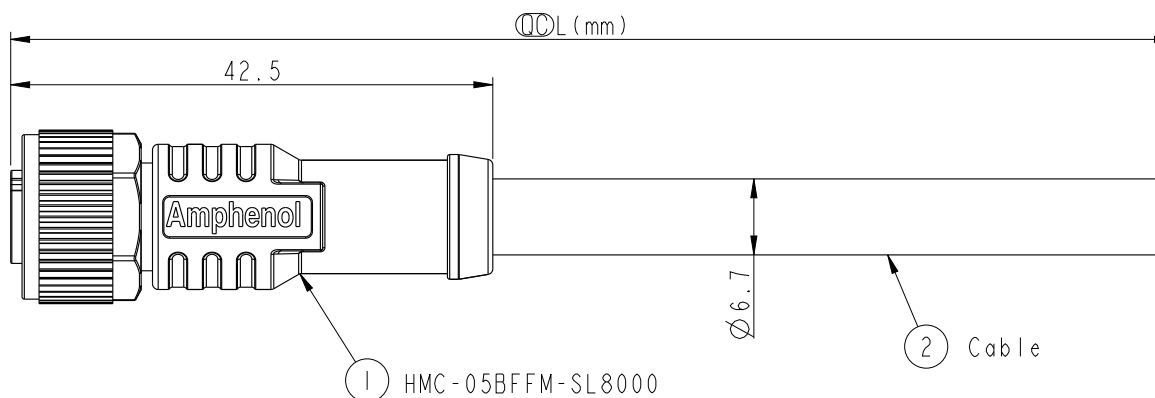

① HMC-05BFFM-SL8000

② Cable



HMC-05BFFM-SL8AXX

XX: 01~99Meters

01: 01Meter

02: 02Meters


...

99: 99Meters

Cable Length(L): 01~99Meters

△ Note:

- * ① Important Dimension To Check.
- * Waterproof Rate: IP68
In 1 meter water within 24 hours
- * Connector: PU, Black
- * Nut: Zinc Alloy, Nickel Plated
- * F Pin: Copper Alloy, Gold Plated 30u"
- * Outer Mold: PU, Blue
- * Cable: CL2, (24#*IP+A/M)+(22#*IP+A/M)+
D+B, PVC UV Cable, OD=6.7mm, Black
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

Conn.
Pin Assignments
Front View

5	Blue 藍	24#	Twist
4	White 白	24#	
3	Black 黑	22#	Twist
2	Red 紅	22#	
1	Drain 地線	22#	
Conn.	Wire Color		
Pin Out			

UNIT:mm	
TOLERANCE	
±0.5mm	

TITLE NMEA2000 SINGLE ENDED CABLE MICRO-C, F CONN F PIN, METAL			
SCALE Free	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Frank Deng	DATE 2017-07-06
DWG NO HMC-05BFFM-SL8AXX	CHECKED BY Fisher Wang	DATE 2017-07-06
CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2017-07-06

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[HMC-05BFFM-SL8A01](#)