





COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-F-000562	K.S.H.Y		05.10.31					

AA(10:1)△

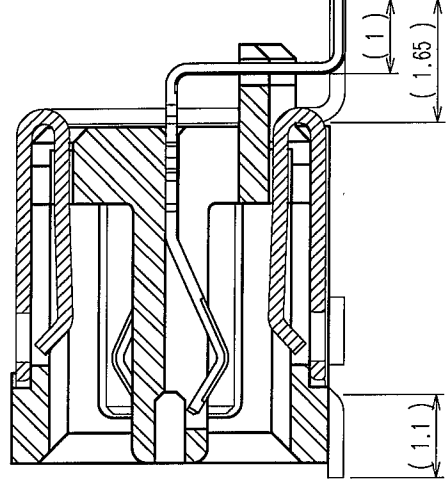

- NOTE
- 1 LEAD-COPLANARITY OF THIS PRODUCT TO BE 0.1MAX FOR SMT LEAD AND 0.15MAX FOR GROUND PLATE LEAD.
 - 2 DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATINGPAIR CANNOT BE MATED AND OPERATED THE LOCK PARTS.
 - 3 [] AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
 - 4 [] AREA IS VACUUM PICKUP AREA FOR REFERENCE.
 - 5 [] THE DIMENSION IS THE CENTER OF VACUUM PICKUP AREA.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 7 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING.
SEE SHEET 2/2 FOR DETAILS.

RECOMMENDED LAND PATTERN DIMENSION OF P.C.B

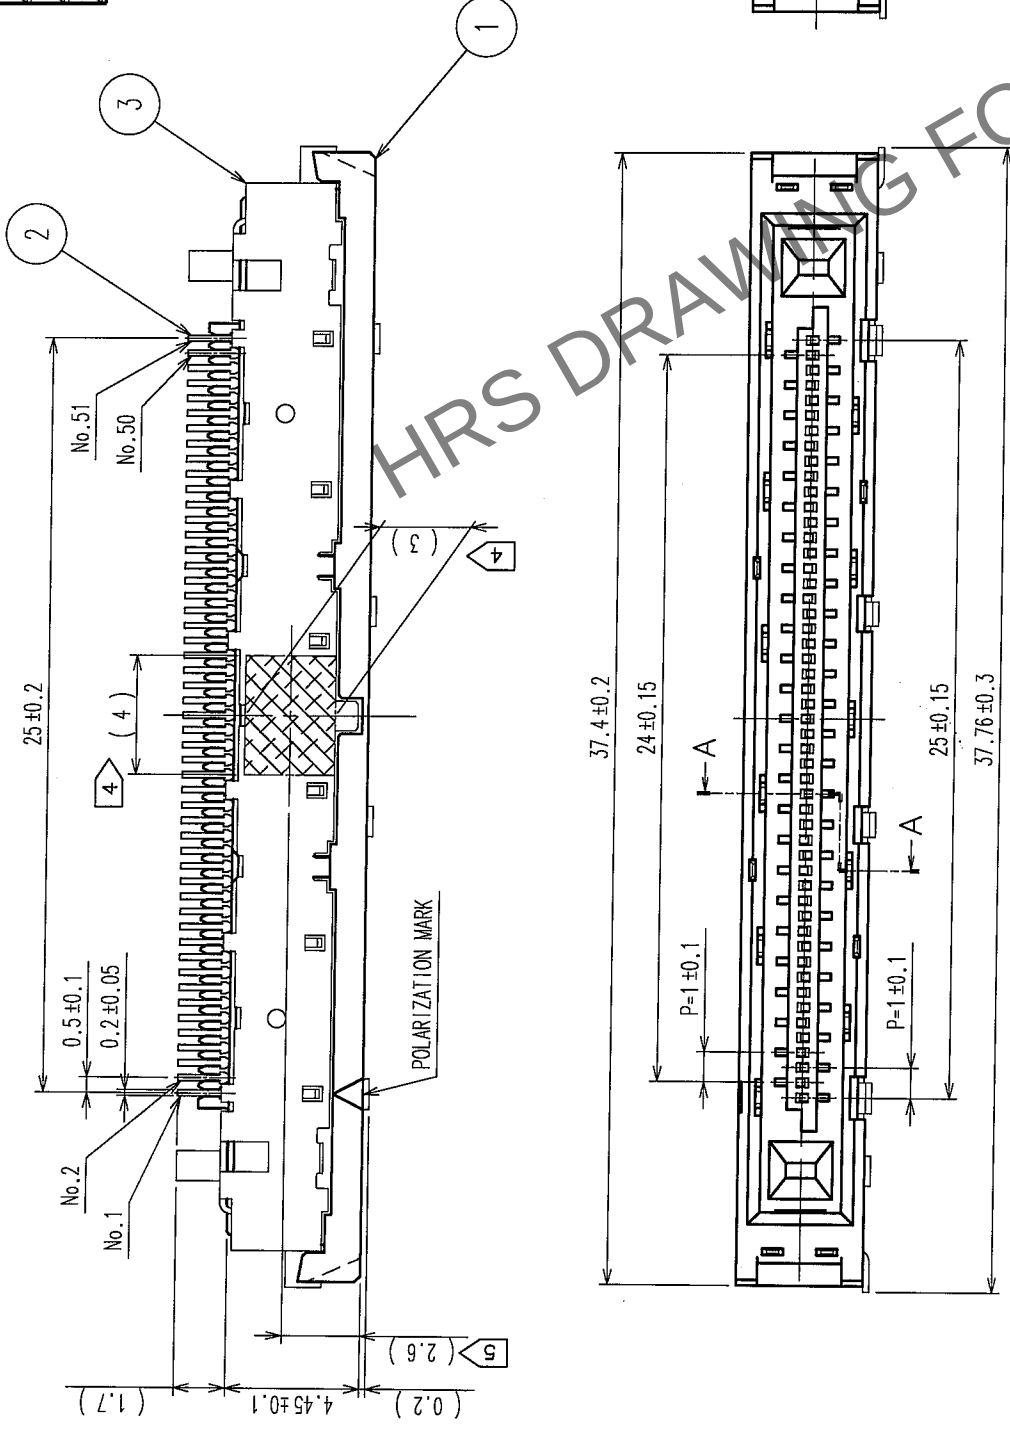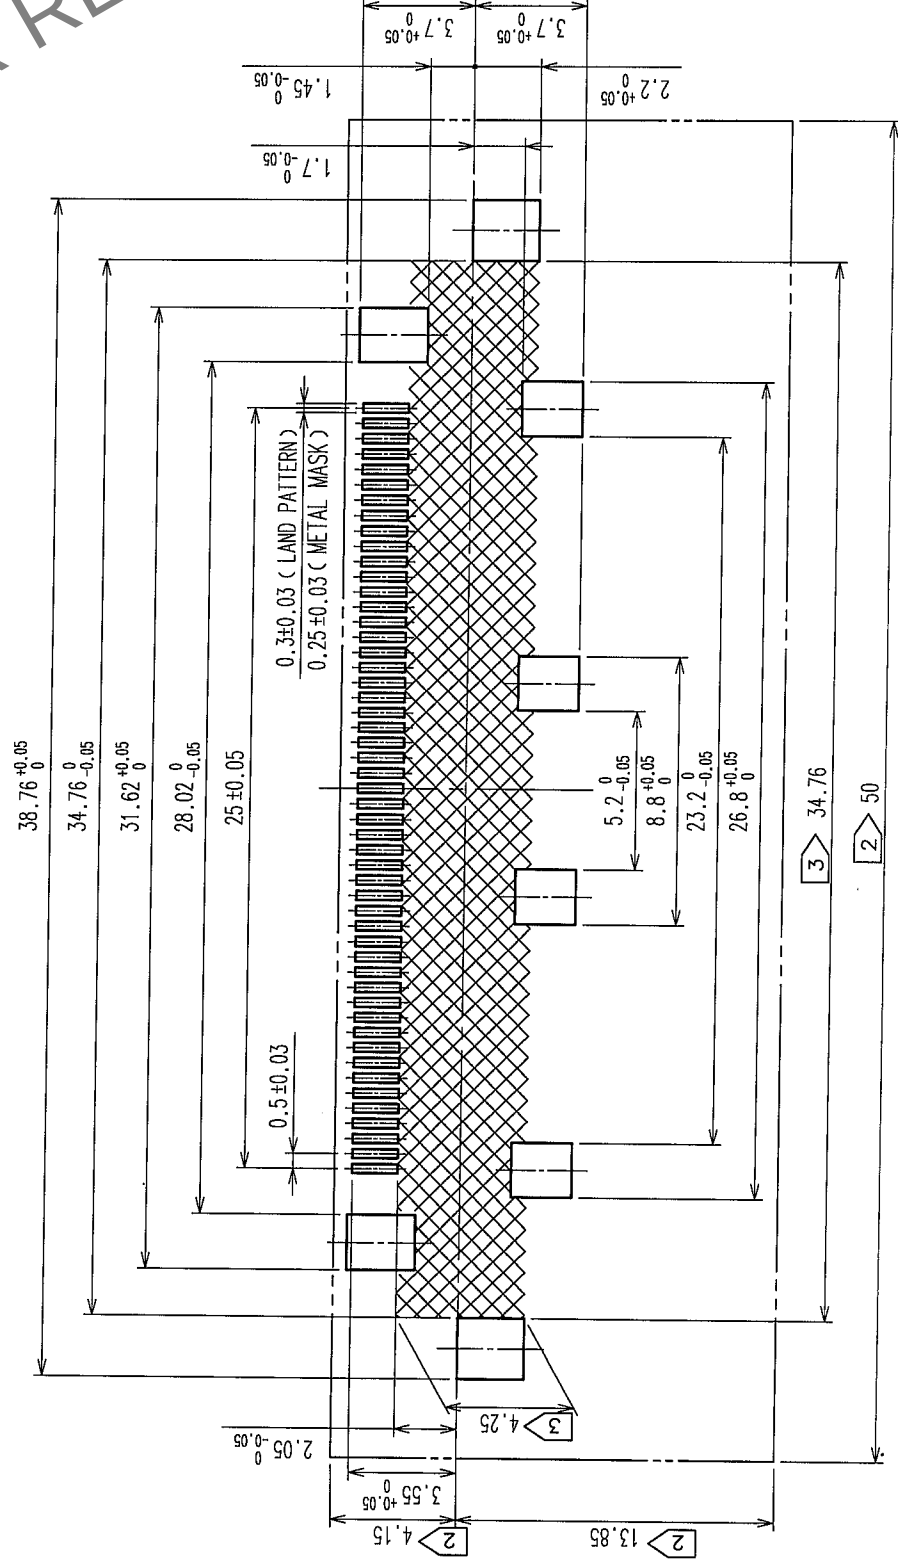

3	NICKEL SILVER		2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μ m min		
1	PA	BLACK			UL94V-0	LEAD AREA:TIN-PLATING 1μ m min	
	MATERIAL	FINISH, REMARKS				UNDER PLATING:NICKEL 0.5μ m min	
NO.			NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			K.SHIBUYA	K.SHIBUYA	H.YAMAGUCHI	H.OKAWA	
			05.08.04	05.08.04	05.08.05	05.08.05	

DRAWING NO.		PART NO.	
EDC3-155800		FX15S-51S-0.5SH	
SCALE	4 : 1	CODE NO.	CL575-2303-7
UNITS	mm		1/2

HRS

HIROSE ELECTRIC CO., LTD



1



	F
--	---