

G-INS-PG29-M68N-PNES-LG - Cable gland



1424491

<https://www.phoenixcontact.com/us/products/1424491>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 18 mm ... 25 mm, shielding: no, connecting thread: Pg29, color: lightgray RAL 7035

Your advantages

- Plastic material conforms to UL 746C f1

Commercial data

Item number	1424491
Packing unit	5 pc
Minimum order quantity	1 pc
Sales key	BF68
Product key	BF7DCX
Catalog page	Page 687 (C-2-2019)
GTIN	4055626373218
Weight per piece (including packing)	36.6 g
Weight per piece (excluding packing)	34 g
Customs tariff number	39269097
Country of origin	TR

G-INS-PG29-M68N-PNES-LG - Cable gland



1424491

<https://www.phoenixcontact.com/us/products/1424491>

Technical data

Mounting

Assembly note	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
---------------	---


Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BS-17
Shielded	no

Data management status

Article revision	00
------------------	----

Dimensions

Dimensional drawing	
Length	53 mm
Length of the connecting thread	11 mm
Hole diameter	37.1 mm ... 37.4 mm
Wrench size, union nut	42 mm
Wrench size, support	42 mm
Hexagon angular dimension	48 mm
Thread type connection side	Pg29

Connection data

Tightening torque	10 Nm \pm 0.5 Nm (Cap nut)
	9 Nm (Support sleeve)

Material specifications

Color	light gray (RAL 7035)
Flammability rating according to UL 94	V2
Seal material Cable seal	CR
Material for screw connection	PA

Cable/line

External cable diameter Cable 1	18 mm ... 25 mm
---------------------------------	-----------------

G-INS-PG29-M68N-PNES-LG - Cable gland



1424491

<https://www.phoenixcontact.com/us/products/1424491>

External cable diameter	18 mm ... 25 mm (for UL 514 B)
-------------------------	--------------------------------

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP66
	IP68 (5 bar / 0.5 h)
Enclosure rating (NEMA)	1
	4
	4X
	12
	13
Ambient temperature (operation)	-40 °C ... 100 °C (static)

G-INS-PG29-M68N-PNES-LG - Cable gland


1424491

<https://www.phoenixcontact.com/us/products/1424491>



Drawings

Dimensional drawing

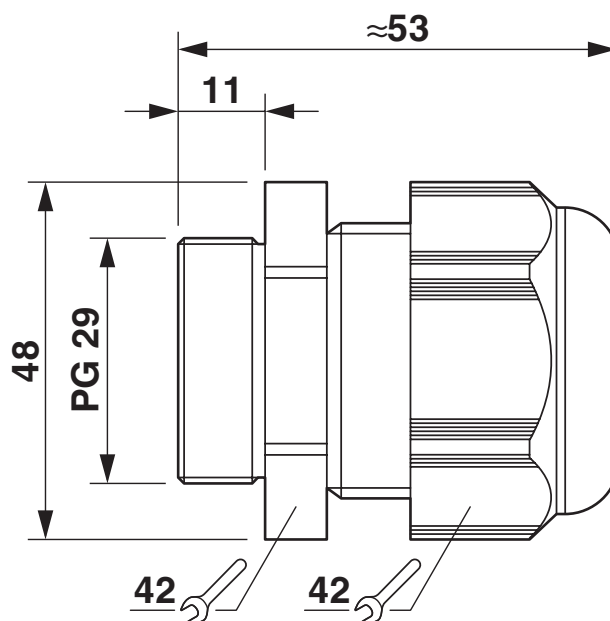

Dimensional drawing

G-INS-PG29-M68N-PNES-LG - Cable gland





1424491


<https://www.phoenixcontact.com/us/products/1424491>


Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424491>

**DNV**
Approval ID: TAE00003WX

**CSA**
Approval ID: 115116

**UL Listed**
Approval ID: E199260

**cUL Listed**
Approval ID: E199260

cULus Listed

G-INS-PG29-M68N-PNES-LG - Cable gland



1424491

<https://www.phoenixcontact.com/us/products/1424491>

Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

G-INS-PG29-M68N-PNES-LG - Cable gland



1424491

<https://www.phoenixcontact.com/us/products/1424491>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com