

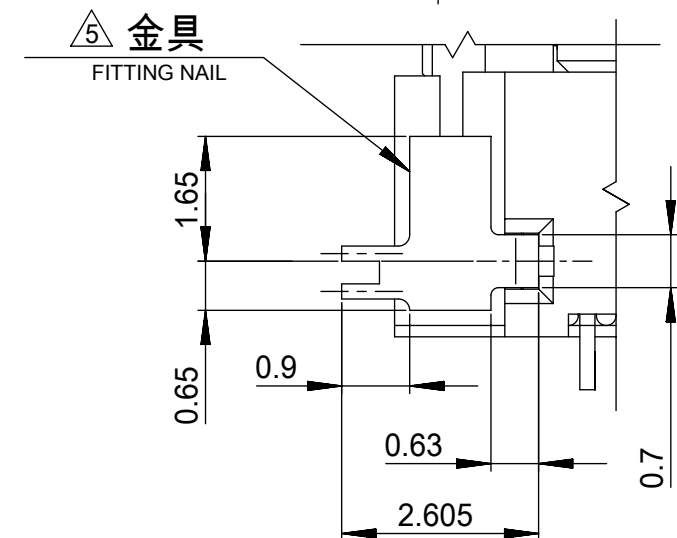
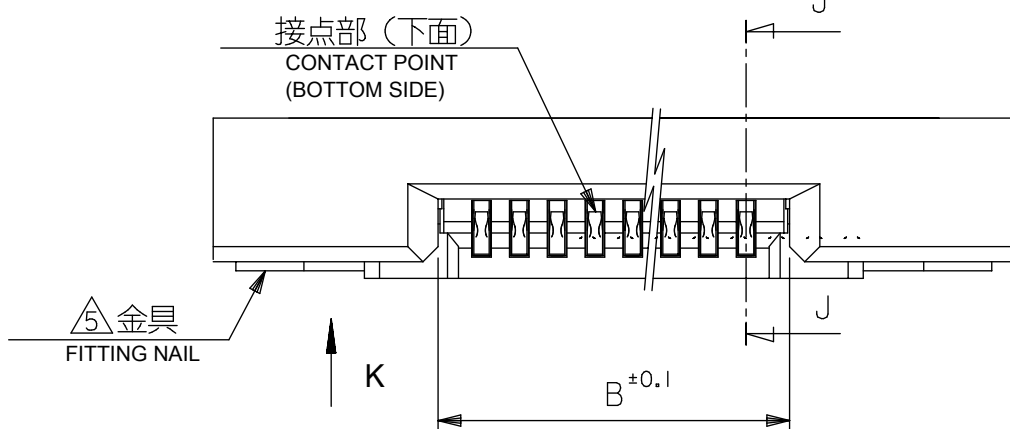
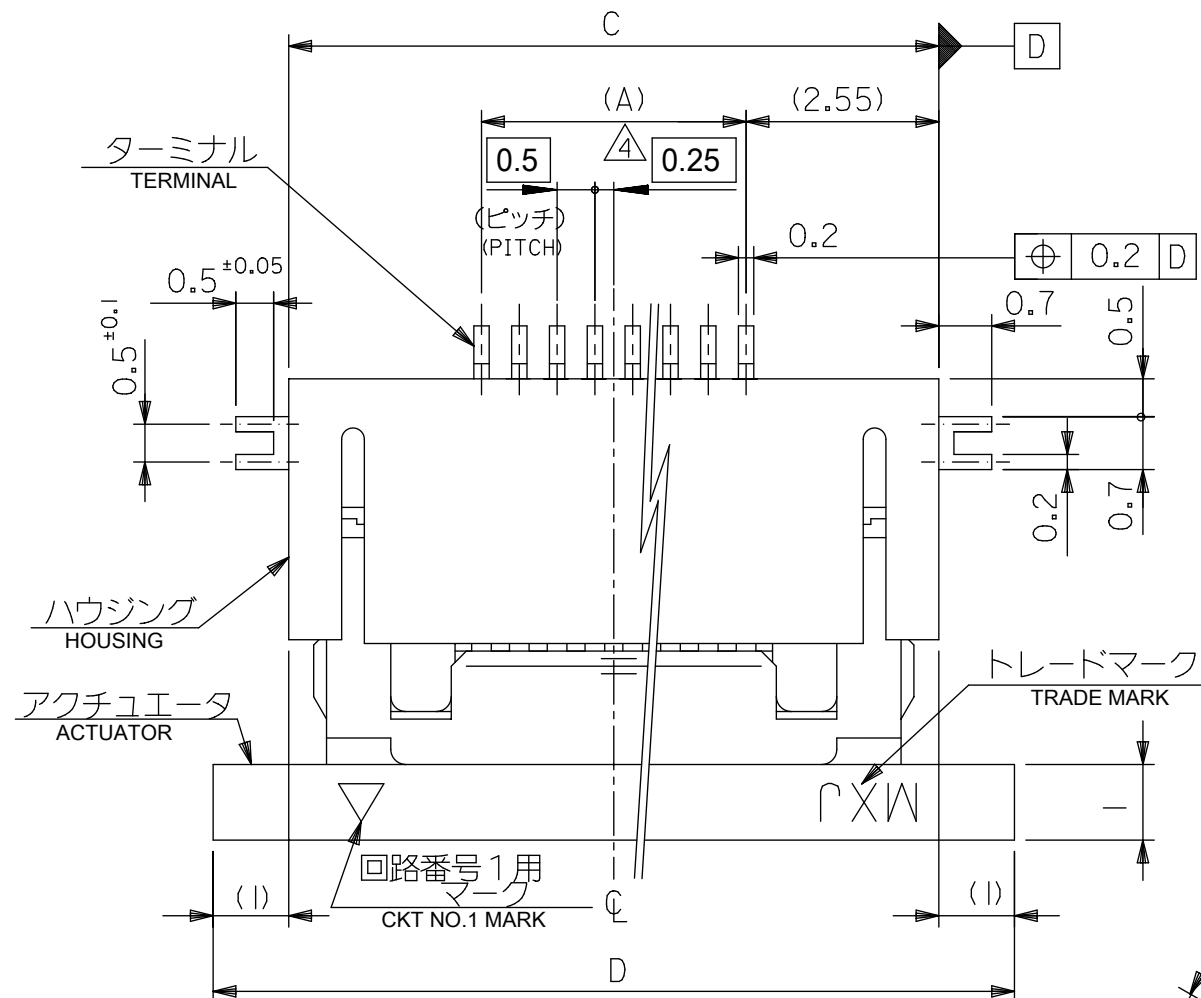


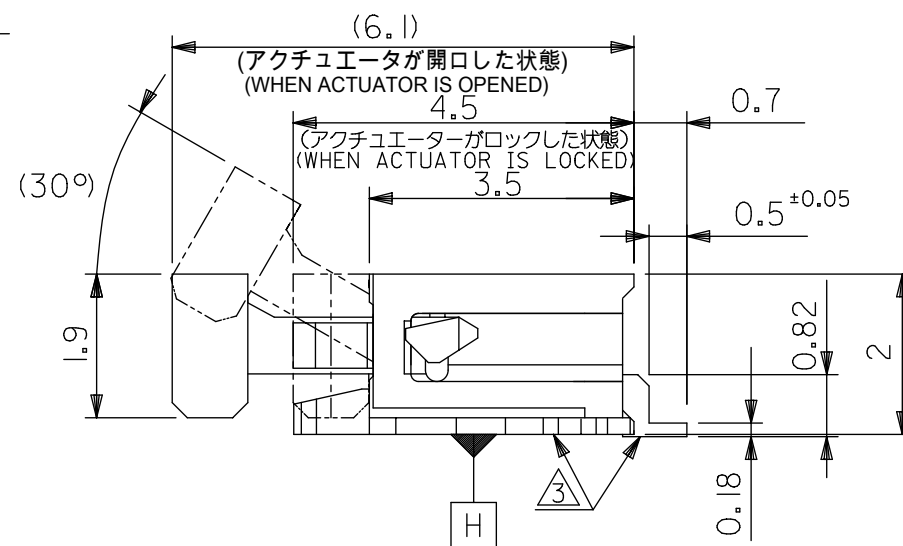

VIEW K
(金具部投影図)
(DETAIL OF FITTING NAIL)

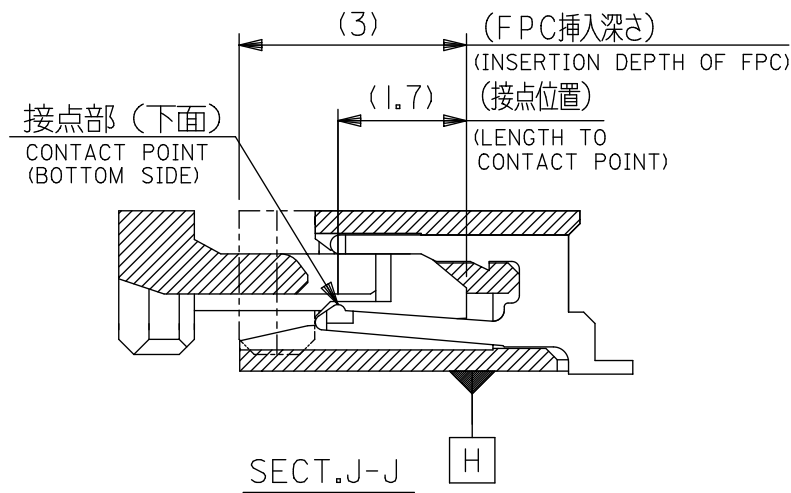

注記NOTES

1.使用材料

MATERIAL

ハウジング：46ナイロン、ガラス充填、UL94V-0、白

HOUSING:PA46, GLASS FILLED, UL94V-0, WHITE

アクチュエータ：ポリフェニレンサルファイド (PPS)、ガラス充填、
UL94V-0、茶色

ACTUATOR:POLYPHENYLENE SULFIDE, GLASS FILLED, UL94V-0, BROWN

ターミナル：リン青銅、ニッケル下地錫ビスマスめっき (t=0.2)

TERMINAL:PHOSPHOR BRONZE,TIN BISMUTH OVER NICKEL PLATING

金具：リン青銅、ニッケル下地錫めっき (t=0.2)

FITTING NAIL: PHOSPHOR BRONZE, TIN OVER NICKEL PLATING

2.インボステープ梱包時は、アクチュエータがロックした状態になります。
IN THE PACKAGE,ACTUATOR OF PART
NO.52437- **26 SHOULD BE LOCKED.

③ ソルダータール半田付け面のズレ量、及び金具半田付け面のズレ量は、基準面Hに対して上方向に0.1MAXIMUM、下方向0.15MAXIMUMとする。
MISALIGNMENT OF SOLDER TAILS AND FITTING NAILS FROM DATUM-H.

UPPER DIRECTON:0.1MAXIMUM

LOWER DIRECTION:0.15 MAXIMUM

△ 4 偶数極に適用

APPLY FOR EVEN CIRCUIT.

△5 パターン剥離止め金具

FITTING NAIL FOR PREVENTION OF PEELING OF P.W.B. PATTERN.

△6 R0.3は、FPCの導体部にかからないこと

R0.3 MUST NOT BE OVERLAPED TO PATTERN OF FPC.

7. ソルダータールの平坦度は、0.1MAXIMUMとする。

SOLDER TAIL COPLANARITY IS 0.1 MAXIMUM.

8.ELV 及び RoHS 適合品


ELV AND RoHS COMPLIANT


21.6	19.6	15.65	14.5	52437-3072	30
21.1	19.1	15.15	14.0	52437-2972	29
20.6	18.6	14.65	13.5	52437-2872	28
20.1	18.1	14.15	13.0	52437-2772	27
19.6	17.6	13.65	12.5	52437-2672	26
19.1	17.1	13.15	12.0	52437-2572	25
18.6	16.6	12.65	11.5	52437-2472	24
18.1	16.1	12.15	11.0	52437-2372	23
17.6	15.6	11.65	10.5	52437-2272	22
17.1	15.1	11.15	10.0	52437-2172	21
D	C	B	(A)	EMBOSSSED PACKAGE	極数 CKT.
				ORDER No. オーダー番号	


CONNECTOR SERIES NO. : 52437-**26

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)		ANGULAR TOL		±	°	0.5 FPC CONN. ZIF FOR SMT R/A (BOTTOM CONTACT) TIN-BISMUTH PLATING									
		4 PLACES		±											
		3 PLACES		±											
		2 PLACES		±		PRODUCT CUSTOMER DRAWING									
		1 PLACE		±											
		0 PLACES		±											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
								SD-52437-017		PSD		001		G	
DRAWING				SERIES		MATERIAL NUMBER		CUSTOMER				SHEET NUMBER			
A3-SIZE				52437		SEE TABLE		GENERAL MARKET				1 OF 2			

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 ^{UNDER}	±0.2
10 ^{OVER} 30 ^{UNDER}	±0.25
30 ^{OVER}	±0.3
ANGULAR	±3 °

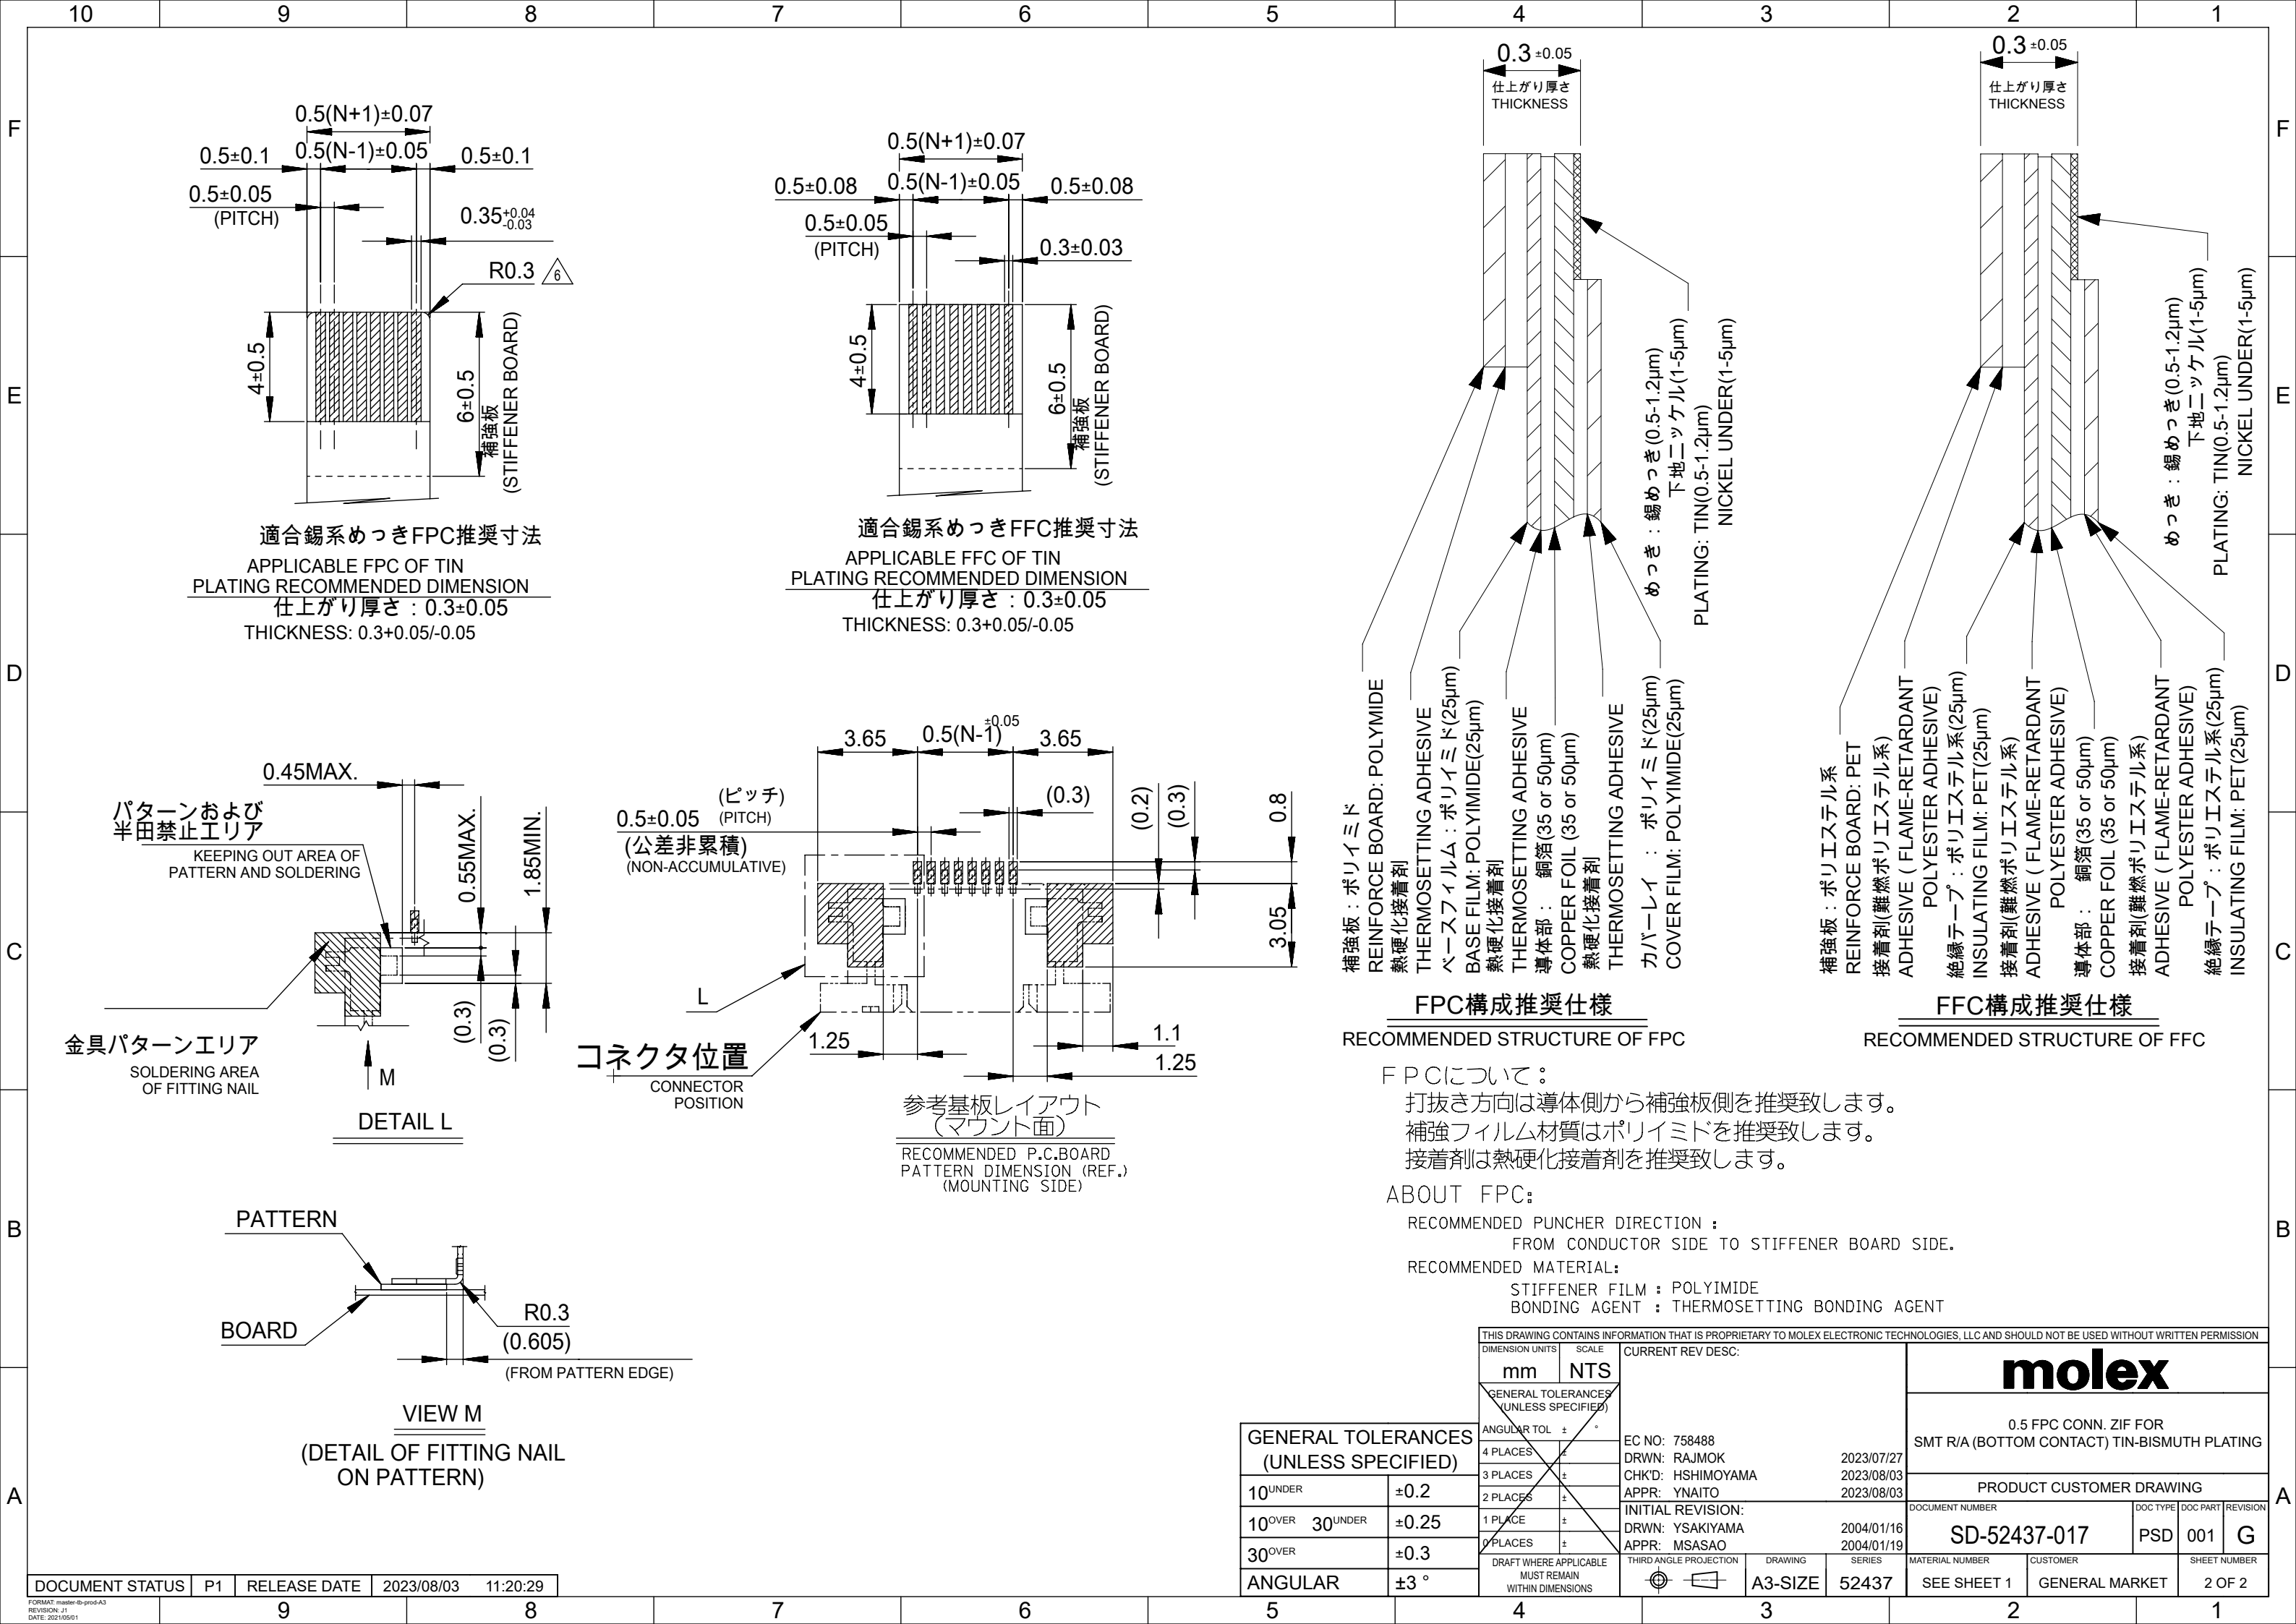

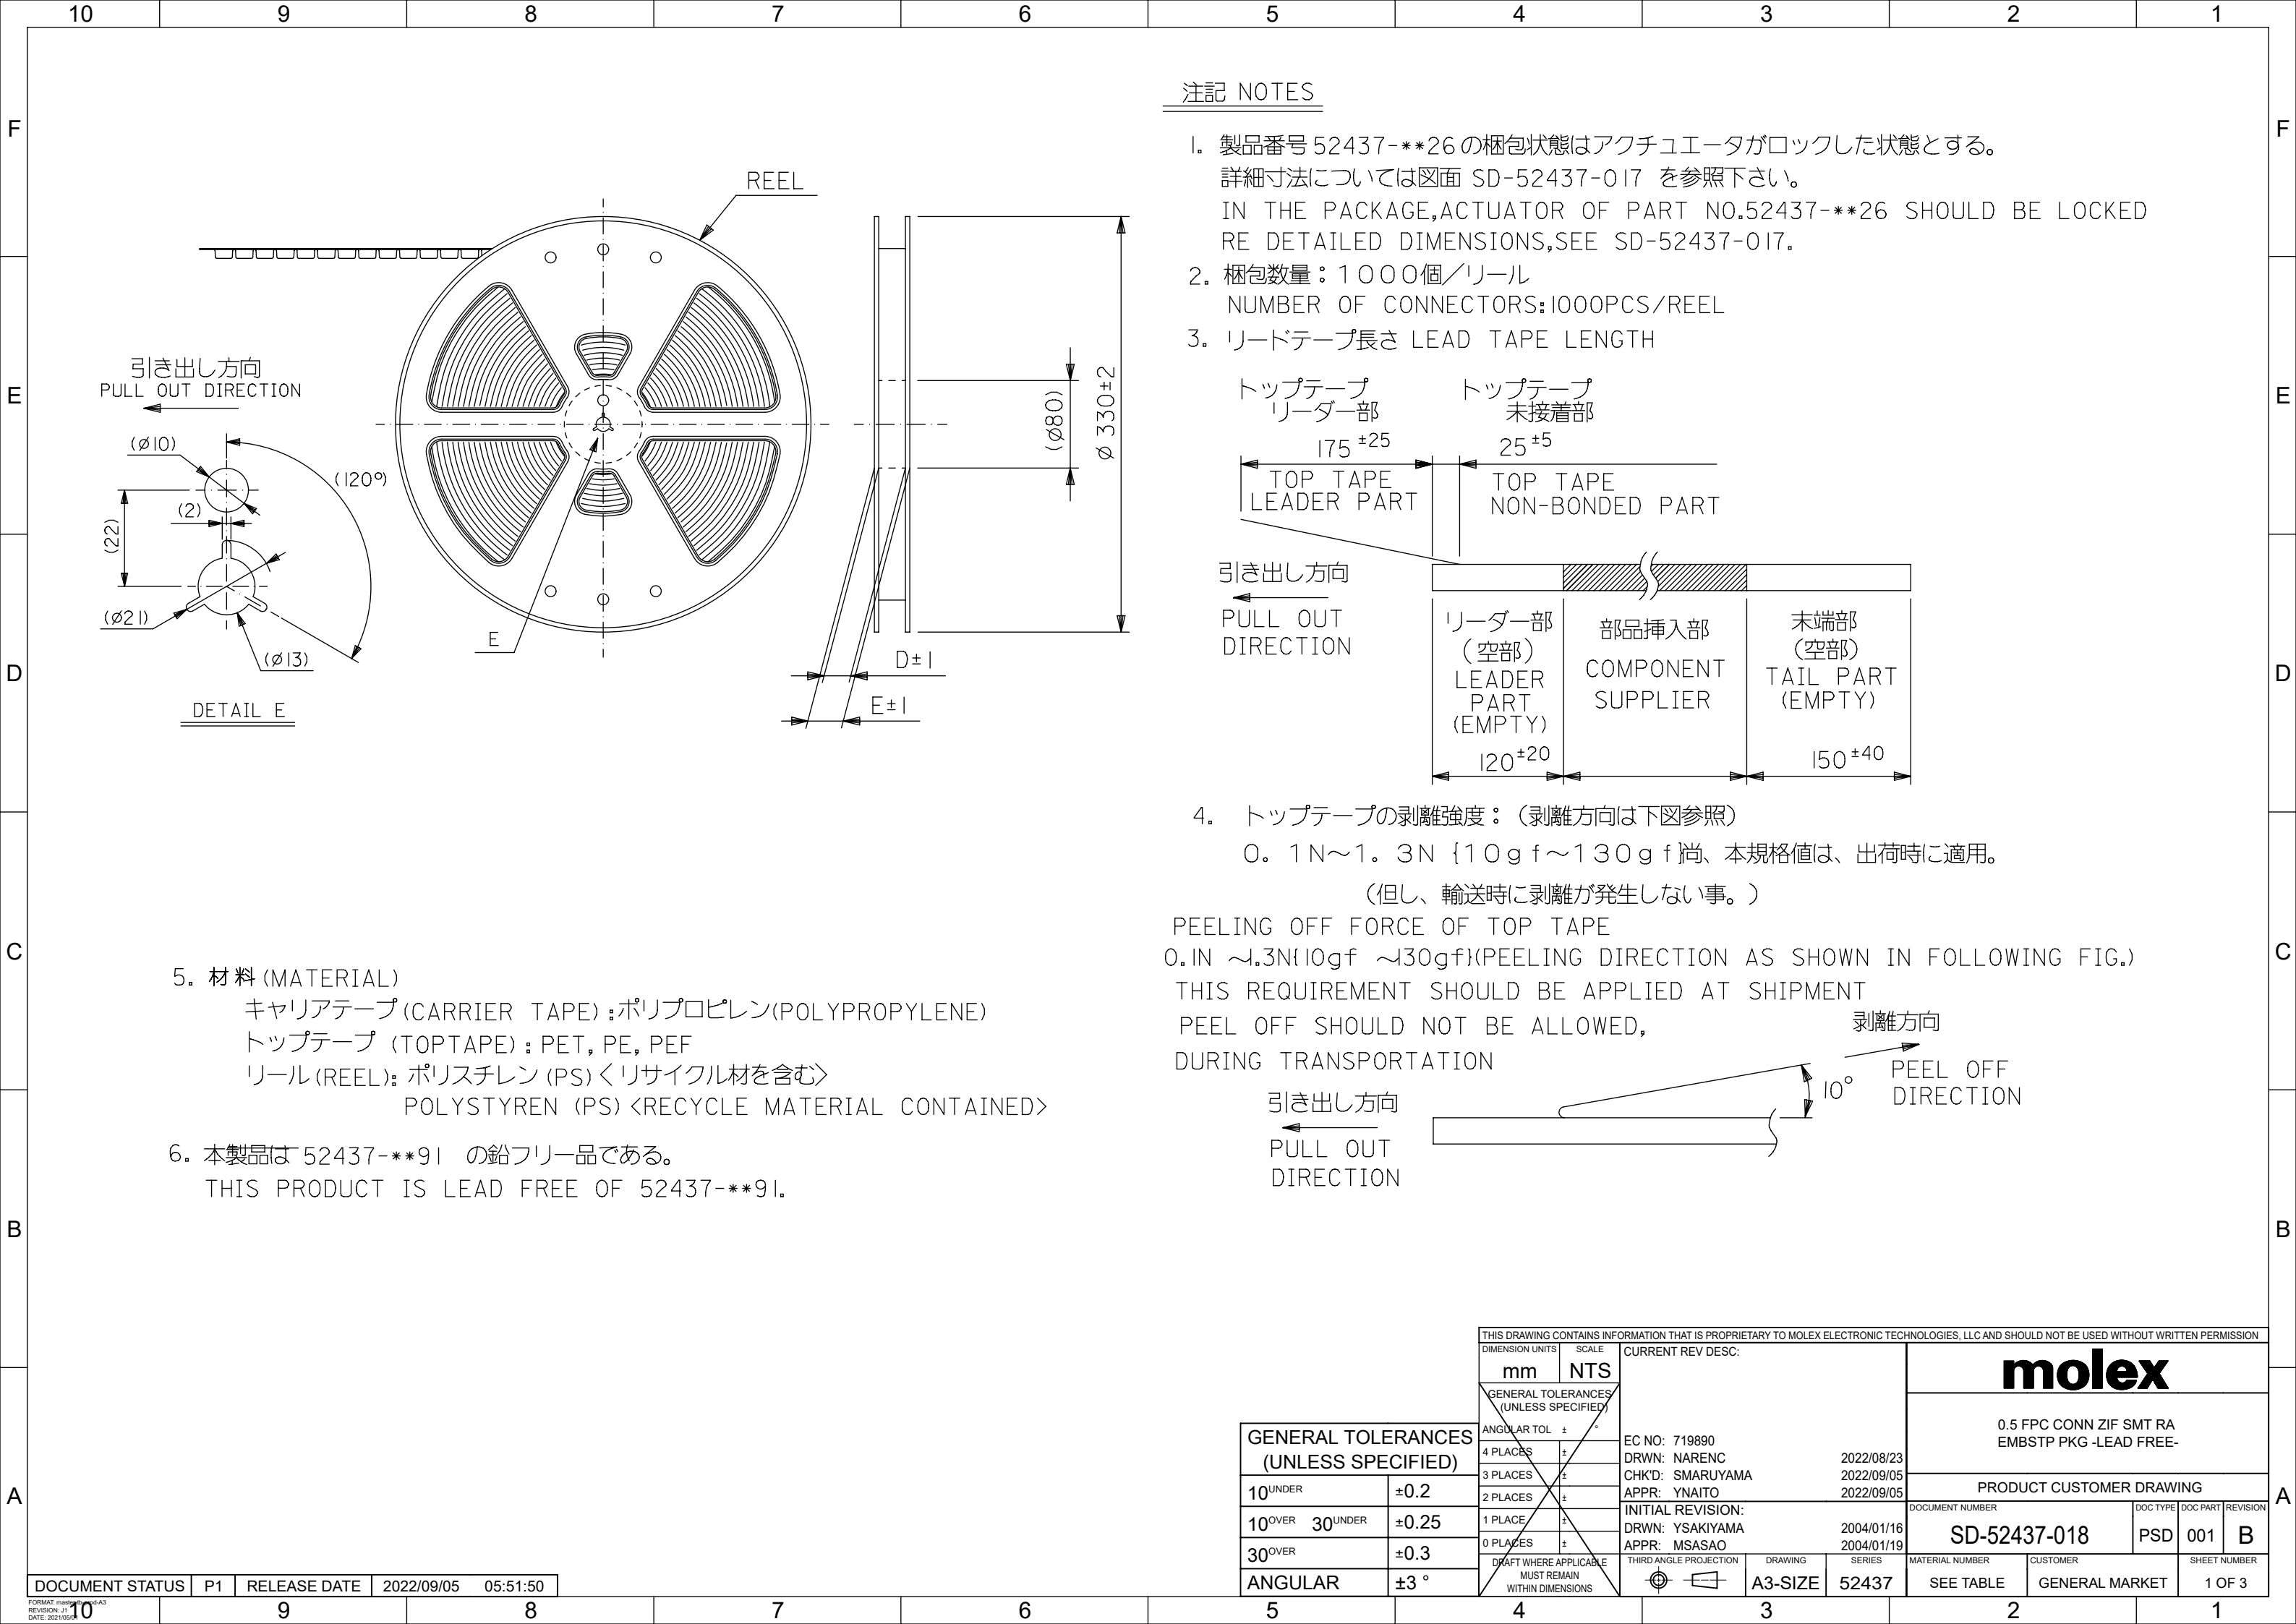

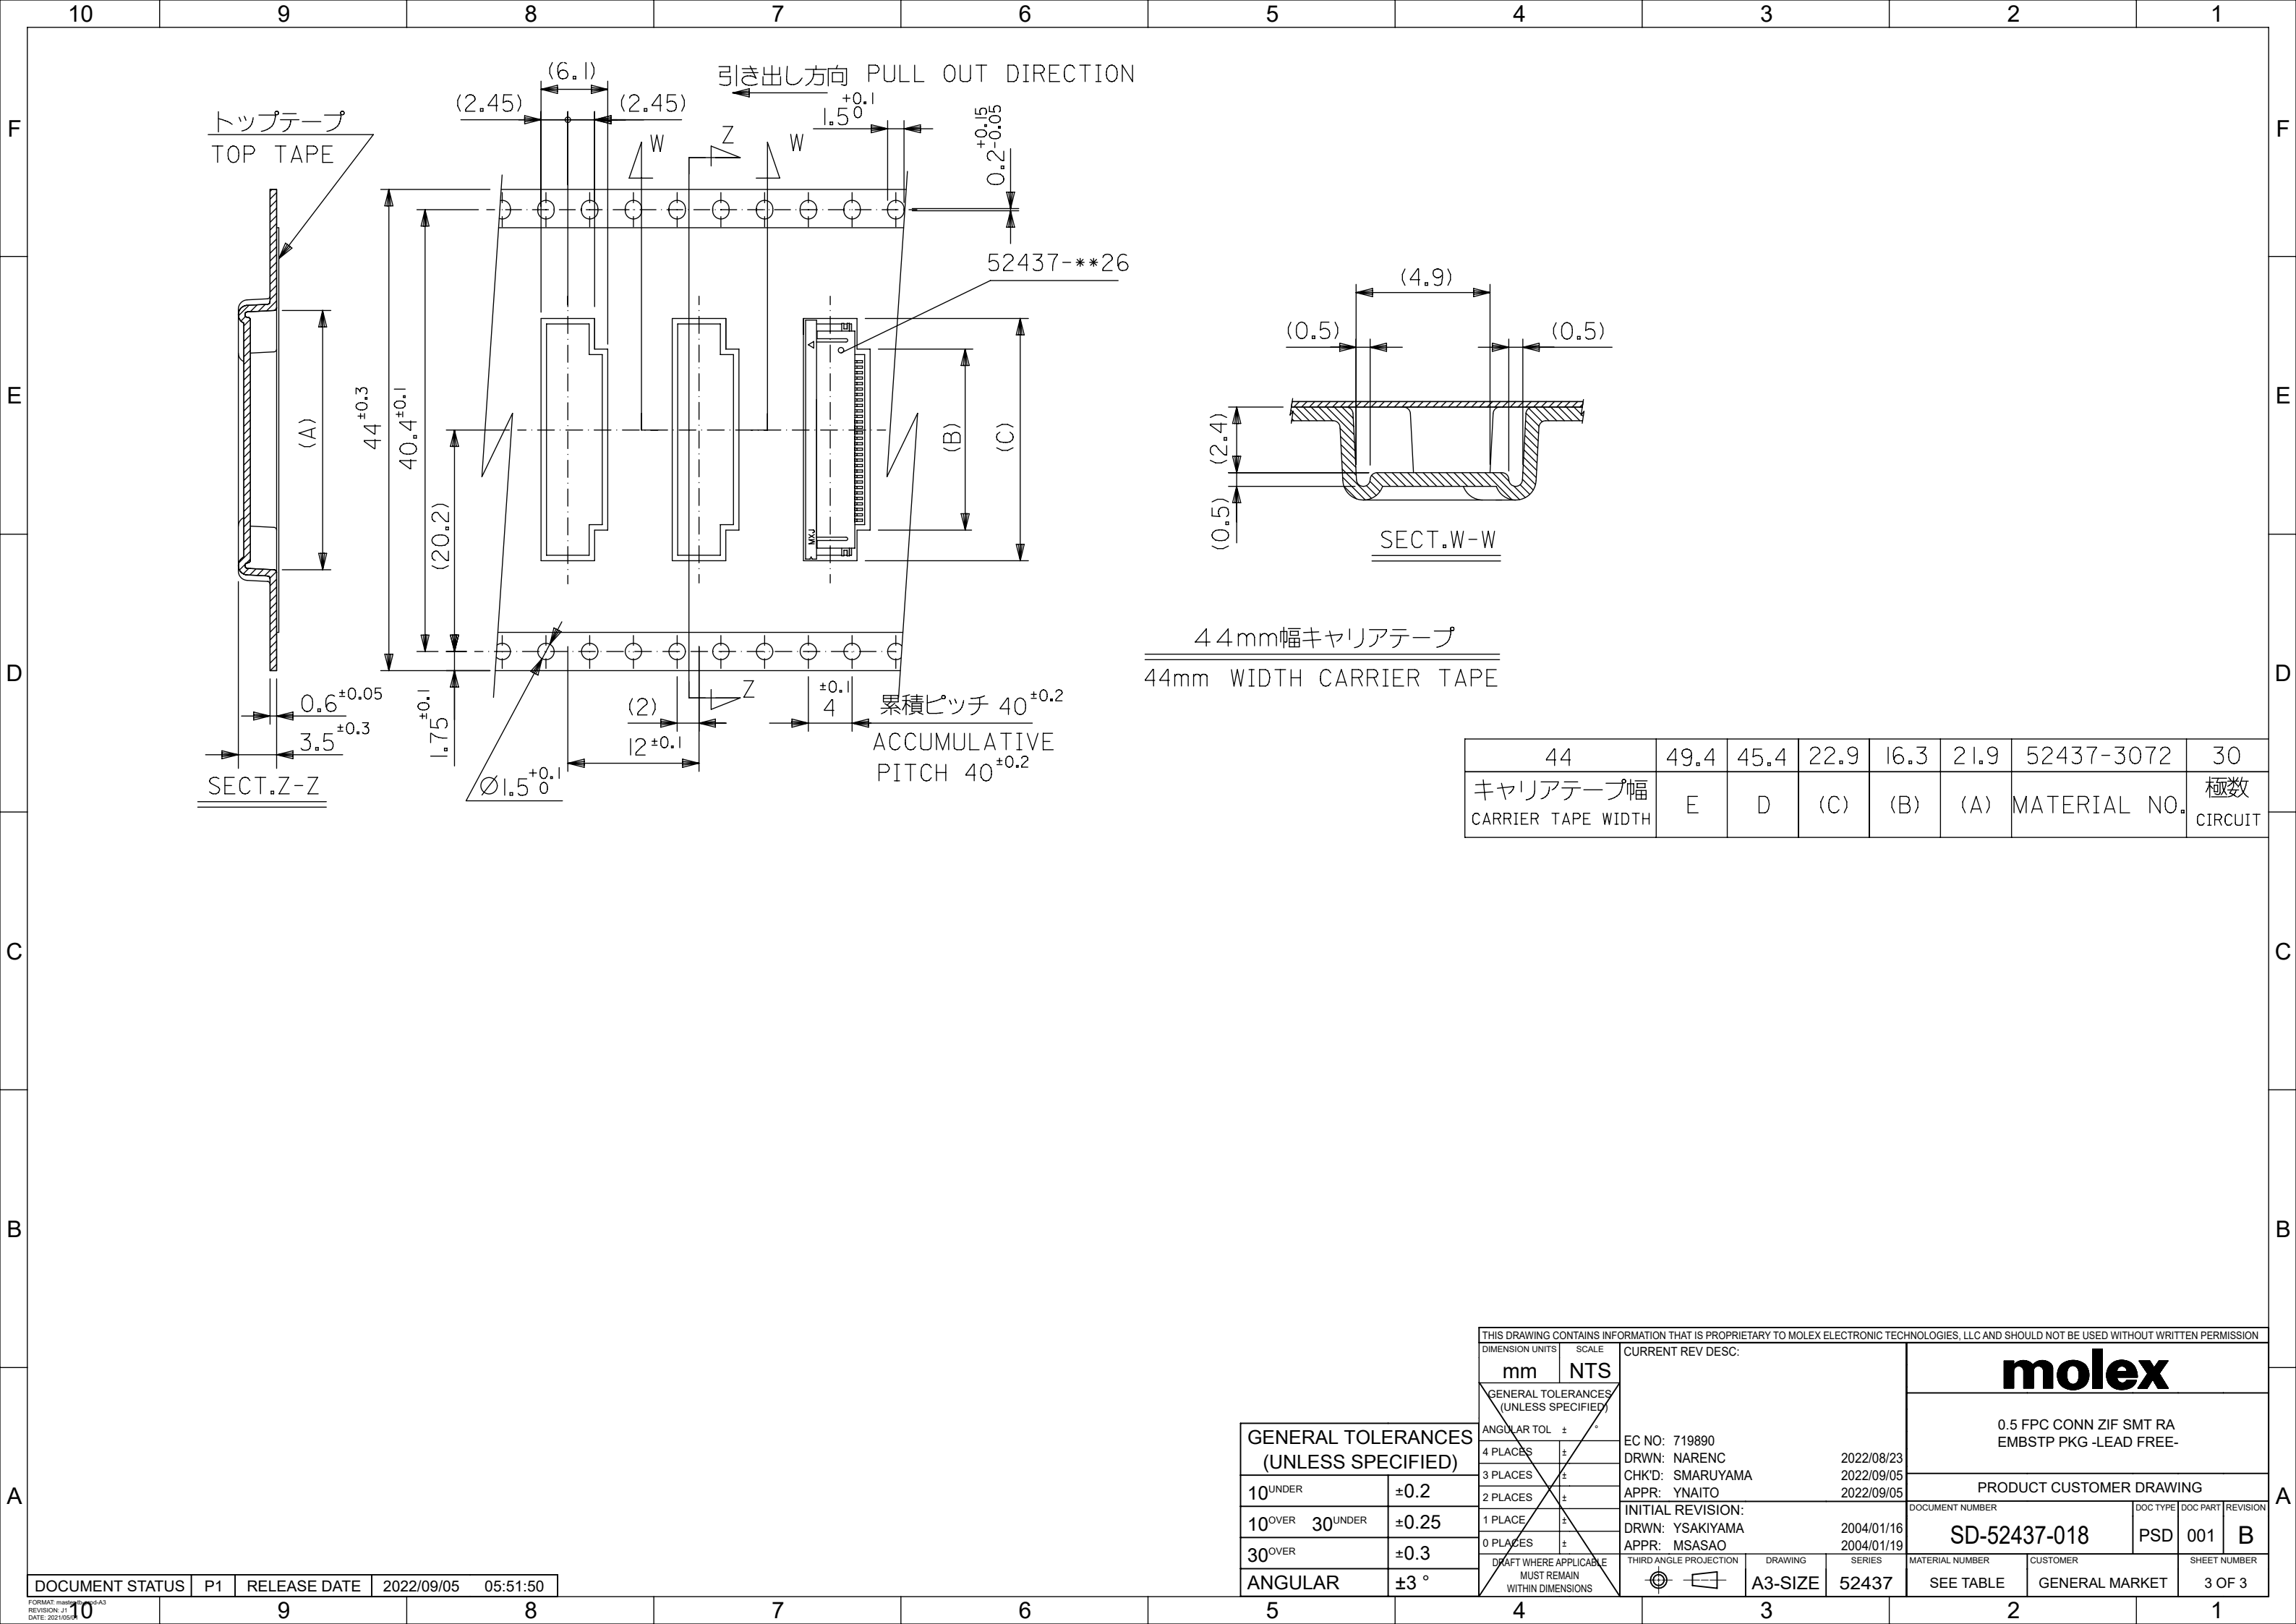

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

44	49.4	45.4	22.9	16.3	21.9	52437-3072	30
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	極数 CIRCUIT

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 ^{UNDER}	±0.2
10 ^{OVER} 30 ^{UNDER}	±0.25
30 ^{OVER}	±0.3
ANGULAR	±3 °

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex		
DIMENSION UNITS		SCALE		0.5 FPC CONN ZIF SMT RA EMBSTP PKG -LEAD FREE-		
mm	NTS	GENERAL TOLERANCES (UNLESS SPECIFIED)		PRODUCT CUSTOMER DRAWING		
ANGULAR TOL		±	°	EC NO: 719890 DRWN: NARENC CHK'D: SMARUYAMA APPR: YNAITO		
4 PLACES		±		INITIAL REVISION: DRWN: YSAKIYAMA APPR: MSASAO		
3 PLACES		±		2022/08/23 2022/09/05 2022/09/05		
2 PLACES		±		DOCUMENT NUMBER		
1 PLACE		±		SD-52437-018		
0 PLACES		±		PSD 001 B		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		SHEET NUMBER		
		DRAWING		3 OF 3		
		SERIES				
		MATERIAL NUMBER				
		CUSTOMER				
		A3-SIZE				
		52437				
		SEE TABLE				
		GENERAL MARKET				