

Type FSX

Fast Acting Glass Tube Fuse

Automotive Glass



www.optifuse.com

(619) 593-5050

Fuse Size: 1/4" x 1" (6.3 x 25.4mm)

Ampere Rating: 250mA ~ 30A

Voltage Rating: 125V / 250V

Electrical Characteristics:


100%	135%	200%
Min.	Max.	Max.
4h	1h	120s

Agency Standards and Listings:



According to UL248-14

Mechanical Dimensions: Inches[mm]

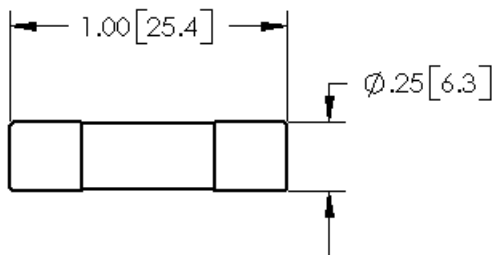

Part Number	Ampere Rating	Interrupt Rating	Voltage Rating			
FSX-250mA	250mA	10KA @125VAC 35A @250VAC	125V/250V	●		
FSX-500mA	500mA			●		
FSX-750mA	750mA			●		
FSX-1A	1A	10KA @125VAC 100A @250VAC		●		●
FSX-1.25A	1.25A			●		●
FSX-1.5A	1.5A			●		●
FSX-2A	2A			●		●
FSX-2.5A	2.5A			●		●
FSX-3A	3A	10KA @125VAC 200A @250VAC		●		●
FSX-4A	4A			●		●
FSX-5A	5A			●		●
FSX-6A	6A			●		●
FSX-7A	7A			●		●
FSX-8A	8A			●		●
FSX-10A	10A	200A @125VAC 200A @250VAC		●		●
FSX-12A	12A				●	●
FSX-15A	15A				●	●
FSX-20A	20A	100A @125VAC	125V		●	
FSX-25A	25A				●	
FSX-30A	30A				●	

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev C 10/2017 - Page: 1/1
Code: J01-01H