


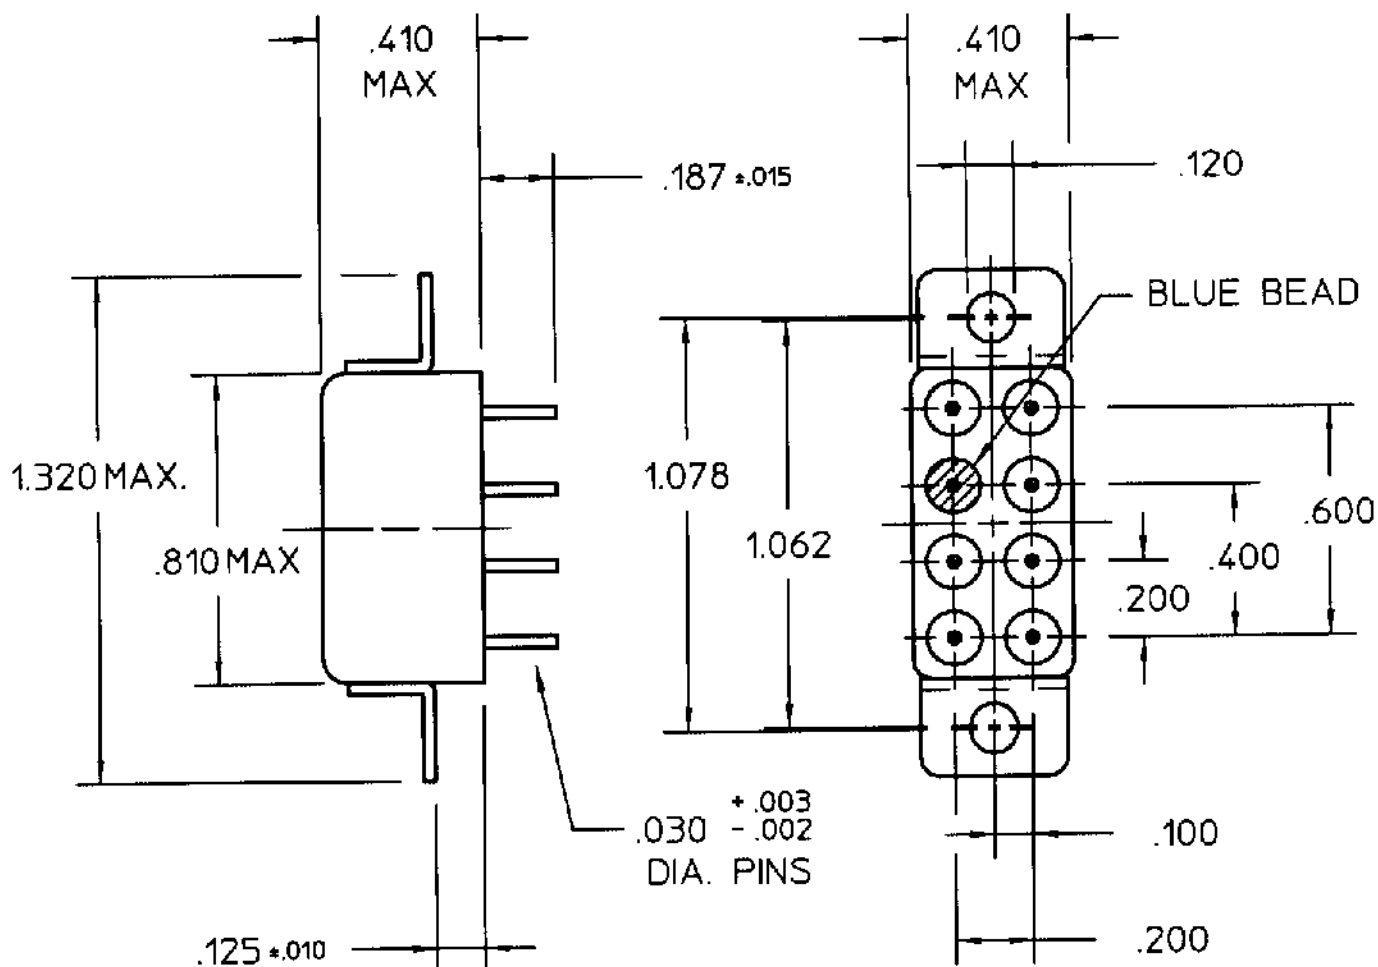

REV. 0

DCO 15810


COIL: @ 25°C
 RESISTANCE 700 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 15.0 VDC
 MUST RELEASE 8.0 VDC MAX 1.5 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 6 ±1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE
 OF -48 VDC WITH BIFILAR COIL
 OPERATE & RELEASE 5 MS MAX.
 CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

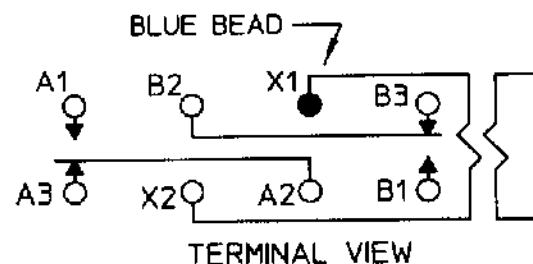

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 9/7/99 CK. 9/7/99

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/22-005M REV.

'HMB' RELAY

HMB1230K01M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HMB1230K01M](#)