




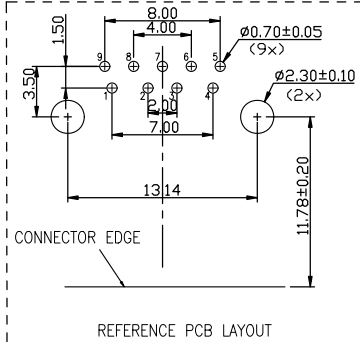



中国CAD教育版设计

A
B
C
D
E
F
G



目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE

SPECIFICATIONS:

Contact current Rating:
1.8 Amperes for pin1&pin4.
0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts

Mechanical Characteristics:
Mating Force:35 Newtons.Maximum
Unmating Force:10 Newtons.Minimum.

MATERIAL: 8N Min After Durability

Housing: PBT+30%GF 94V-0 COLOR:BLUE

Contact: copper alloy(T=0.25mm)

Shell: Brass

PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all

Shell: Nickel Plated

operating Temperature:-55'to+85'

中国CAD教育版设计

A
B
C
D
E
F
G

中国CAD教育版设计

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	徐榕强	产品料号 PRODUCT PART NO.	901-112A105AD10100		
X.	±0.25	X'.	±5'	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF90度3.0外扣弯脚有边内弹铜壳16.5蓝胶
.X	±0.20	.X'.	±2'	日期 DATE	2009/10/20	核准 APPD	黄国荣	角法 VIEW	
.XX	±0.15	.XX'.	±1'	版本 VER					A0
.XXX	±0.10	.XXX'.	±0.5'						