

F

E

D

C

B


A

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND




6 x d	Ä 4171	03.01.2012	Lehmen.	norm	DIN 41652
2 x c	Ä 2754	23.07.2007	Lehmen.	d-old	Kat119PA
1 x b	Ä 2480	06.04.2006	Lehmen.		
a	Original				
rev.	description	date	name		



tolerance



scale:	1:1	
material:	SEE NOTES	
title: METAL HOOD 15-37pos. EMI/RFI SHIELDING with side cable entry and jack screws 4-40 UNC	dwg no:	
	AutoCAD	DIN-A
	16K1A622	4
part no: SEE TABLE		
sh:1/2		

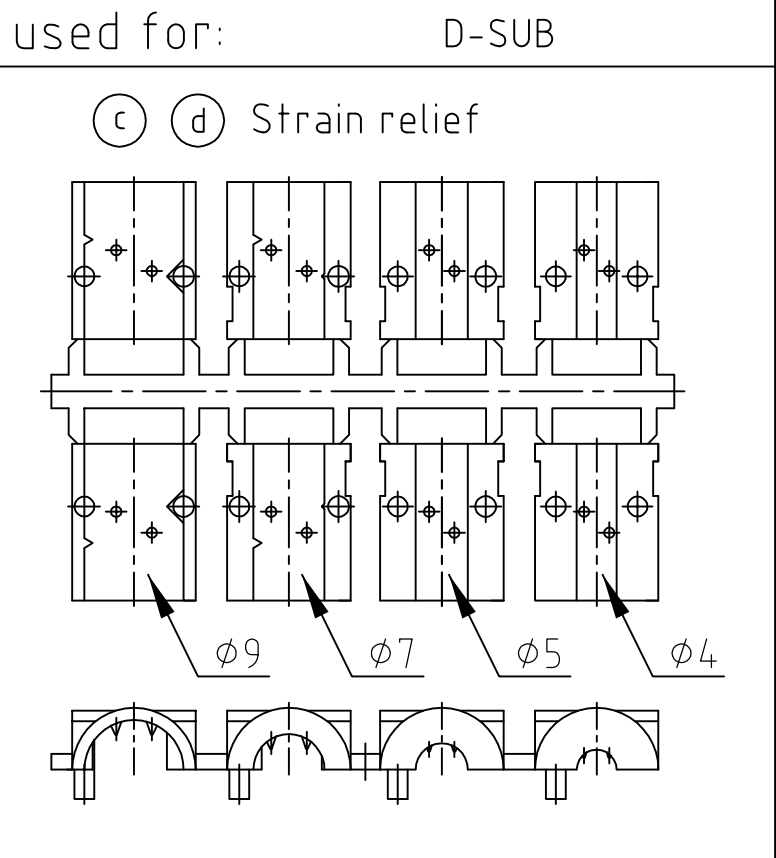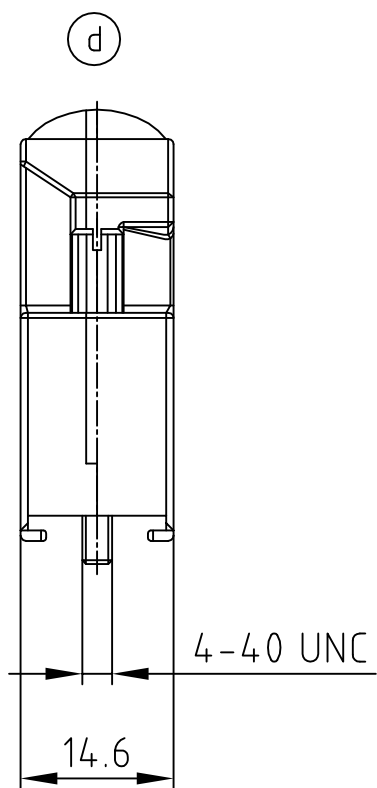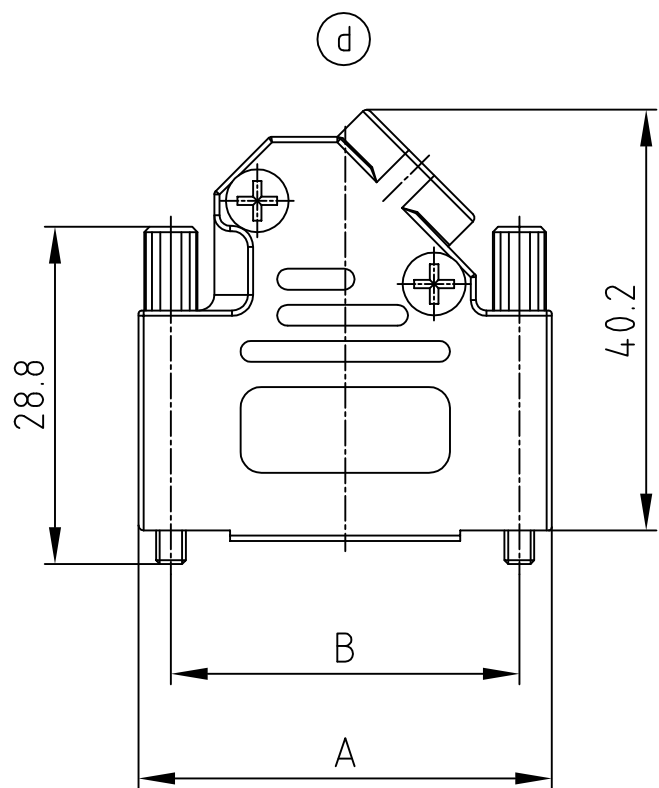

F

E

D

C

B

A

4

3


2

1


used for: D-SUB

ASSEMBLY INSTRUCTION:


Use two halves of strain relief
different sizes can be mixed

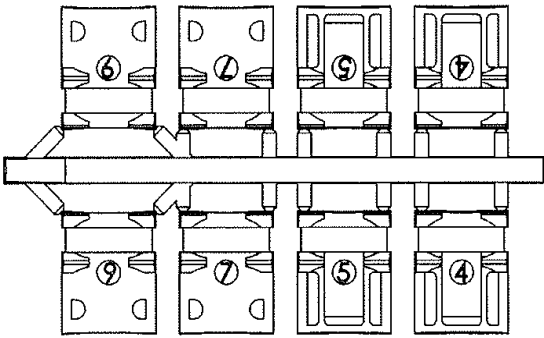


Strip cable 18mm and
shape cable to two pigtails

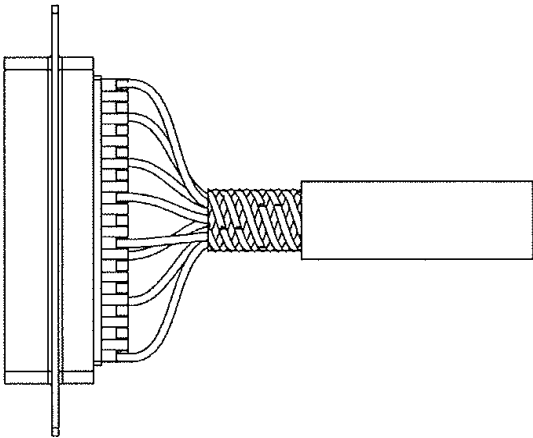


Attach the strain relief around the cable

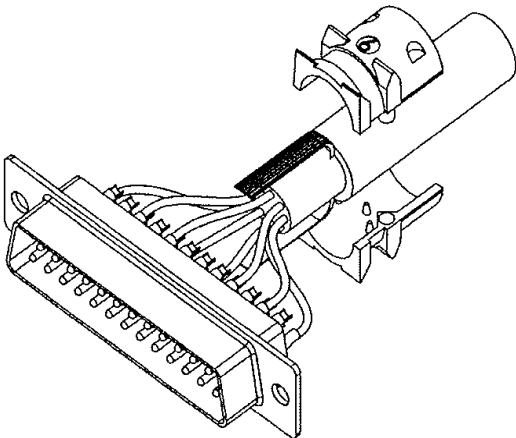


Bend cable shielding back
on outside of strain relief

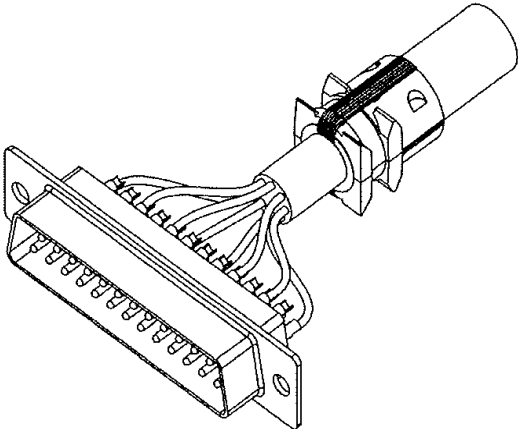

Mount connector and cable
into the backshell

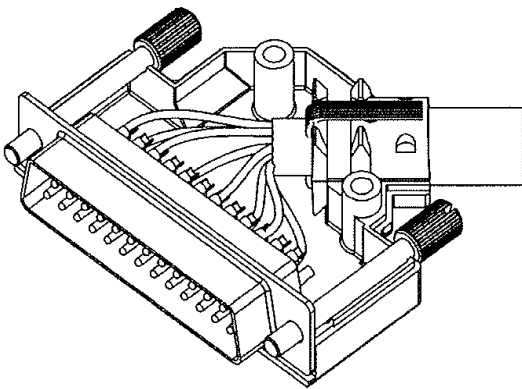


Assemble the other half
screwing force: 100-120 Ncm.

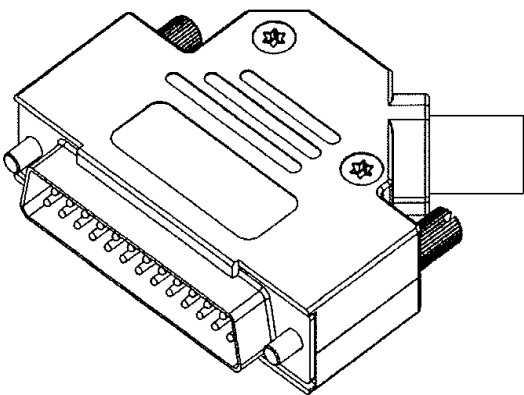

A

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
rev.	description	date	name			
				2012	date	name
				drawn	03.01.	Lehmenkühler
				appd.	03.01.	Fischer
				norm		
				d-old		
a	Original					

scale:	
material:	
title: ASSEMBLY INSTRUCTION METAL HOOD 15-37pos. EMI/RFI SHIELDING with side cable entry and jack screws 4-40 UNC	
dwg no: 16K1A622	DIN-A 4
	sh:2/2
part no: SEE SHEET 1	

4

3

2

1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[165X02719X](#)