

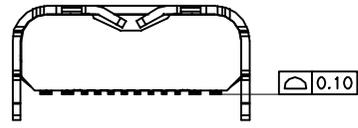
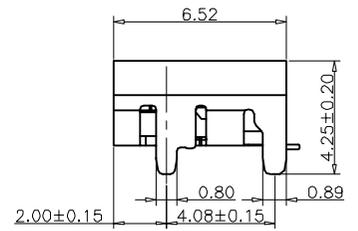


- 备注:
1. 材质及电镀: 见附表1
 2. 电气性能:
 - 2.1 接触电阻: 30mΩ Max FOR INITIAL.
40mΩ Max AFTER TEST.
 - 2.2 耐电压: 100V AC
 - 2.3 绝缘: 100MΩ Min
 - 2.4 额定电流:
COLLECTIVELY VBUS PIN (A4,A9,B4,B9) ,TOTAL 5A
 - 2.5 工作温度: -40°C ~ 80°C.
 3. 机械性能:
 - 3.1 插入力: 5~20N.
 - 3.2 拔出力: 初始值8~20N 测试后6~20N
 - 3.3 寿命: 10,000 CYCLES

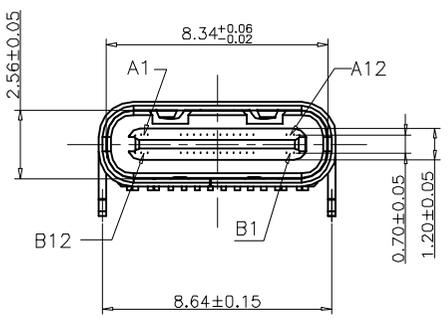

| | | | |
|-----|-------------|-----|-------------|
| A1 | GND | B12 | GND |
| A4 | VBUS | B9 | VBUS |
| A5 | CC1 | B8 | SBU2 |
| A6 | DP1 | B7 | DN2 |
| A7 | DN1 | B6 | DP2 |
| A8 | SBU1 | B5 | CC2 |
| A9 | VBUS | B4 | VBUS |
| A12 | GND | B1 | GND |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

| | | | |
|---|--|---------------|---|
| 深圳市万骏达电子有限公司 http://www.wanjunda.com | | 图号 (DWG NO) | 单位 (UNIT): MM |
| | | 版本 (REV) | 比例 (SCALE) 1:1 |
| 品名 (ITEM NO) TYPE C 16P贴片6.5无柱 | | 日期 (DATE) | 未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2° |
| 料号 (PART NO) TPC-16P-WT-6.5(3MD) | | 设计 (DESIGN) | |
| 模号 (MODEL NO) | | 审核 (CHECKED) | |
| | | 核准 (APPROVED) | |