

OJ-SS-112LM,000

✓ ACTIVE

OEG | OEG Miniature PCB Relay OJ/OJE

TE Internal #: 2-1419129-1

General Purpose Power Relay, Monostable, .2 W Coil, 720 ohm Coil

Resistance, OEG Miniature PCB Relay OJ/OJE, Power Relays

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays > STD OEG Miniature PCB OJ/OJE Pow Relays



Relay Type: **General Purpose Power Relay**
Coil Magnetic System: **Monostable**
Coil Power Rating DC: **.2 W**
Coil Resistance: **720 Ω**
Coil Special Features: **Sensitive Version, UL Coil Insulation Class E**

[All STD OEG Miniature PCB OJ/OJE Pow Relays \(65\)](#)

Features

Product Type Features

Relay Type	General Purpose Power Relay
------------	-----------------------------

Configuration Features

Coil Special Features	Sensitive Version, UL Coil Insulation Class E
Contact Arrangement	1 Form A SPST-NO
Contact Number of Poles	1

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Making Current	3 A
Contact Limiting Short-Time Current	3 A
Contact Limiting Continuous Current	3 A
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Contact Limiting Breaking Current	3 A
Coil Power Rating DC	.2 W



Coil Resistance	720 Ω
Coil Voltage Rating	12 VDC
Contact Current Rating	3 A
Contact Switching Load (Min)	100mA @ 5V
Contact Switching Voltage (Max)	30 VDC
Contact Voltage Rating	30 VDC

Body Features

Product Weight	9 g[.318 oz]
----------------	--------------

Contact Features

Contact Material	AgNi
------------------	------

Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Clearance Between Contact & Coil	7.7 mm[.303 in]
Insulation Creepage Between Contact & Coil	9.4 mm[.37 in]
Product Width	10.2 mm[.401 in]
Product Length	18.2 mm[.716 in]
Product Height	14.7 mm[.578 in]

Usage Conditions

Environmental Category of Protection	RTII
Environmental Ambient Temperature (Max)	90 °C[194 °F]

Operation/Application

Current Type	DC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Box & Tray, Tray
------------------	------------------

Other

Length Class (Mechanical)	16 – 20 mm
---------------------------	------------



Environmental Ambient Temperature Class	85 – 105 °C
Height Class (Mechanical)	14 – 15 mm
Coil Power Rating Class	.15 – .2 W
Width Class (Mechanical)	10 – 12 mm
Contact Current Class	16 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-OE4-OJ1 STD OEG Miniature PCB OJ/OJE Pow Relays	 TE Part # 1461220-4 OJ-SS-112LM,003	 TE Part # 1461220-6 OJ-SS-112LM,0000W	 TE Part # 1649222-7 OJE-SS-112DM,0000W
--	--	--	---




Also in the Series | OEG Miniature PCB Relay OJ/OJE



Power Relays(67)

Customers Also Bought

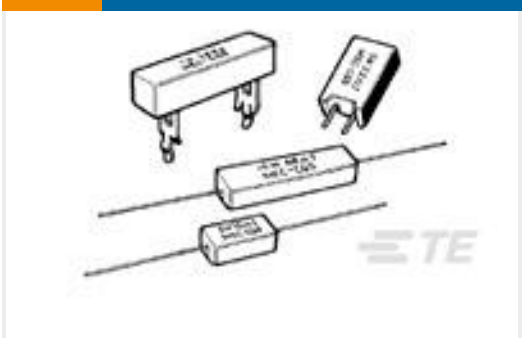

TE Part #1623785-8
SQM10 470R 5% (WIRE)




TE Part #1623127-1
CRG0805 1% 180R



TE Part #284392-2
TERMI-BLOK PCB SIDE ENTRY STAC



TE Part #4-1879214-8
CPF 0402 1K05 0.1% 25PPM 1K RL

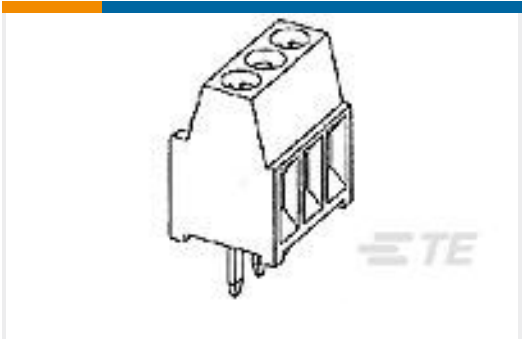


TE Part #1546215-2
TERMI-BLOK PCB MOUNT, 90 2P.



TE Part #9-2176371-7
RQ 0603 46K4 0.1% 10PPM 5K RL




TE Part #225252-E
M12 MALE, A CODE, RA, 4P THR
REAR MOUNT

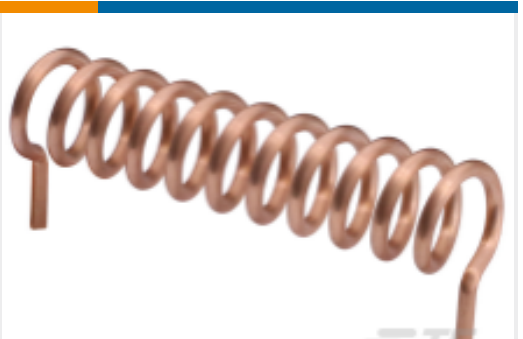

TE Part #ANT-433-HETH
Antenna 1/4 Wave Coil 433MHz THM



TE Part #ANT-LPC-FPC-100
Antenna Vert 5G LTE FPC 100

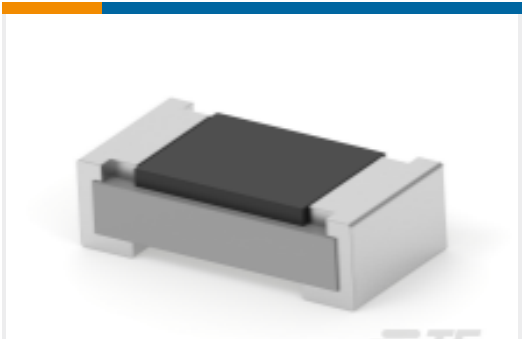

TE Part #3-2176237-1
CPF A 0603 2K0 0.1% 25PPM 5K RL

Documents

Product Drawings

OJ-SS-112LM,000

English

CAD Files

3D PDF

3D



Customer View Model

[ENG_CVM_CVM_2-1419129-1_G.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1419129-1_G.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1419129-1_G.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[OJ_OJE Series Relay Data Sheet English](#)

English

Product Specifications

[OJ-SS-112LM,000 Spec Sheet](#)

Japanese

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English